

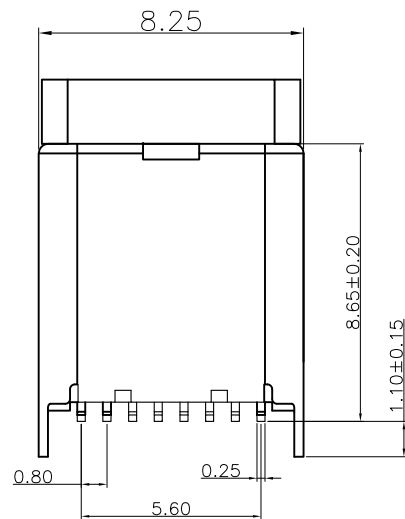
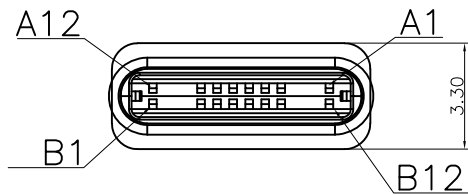


4	PLASTIC	LCP	BLACK	UL 94V-0
3	Latch	SUS301	—	Ni Plated
2	TERMINAL	C5191-H	—	Gold Plated
1	SHELL	SUS201	—	Ni Plated
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

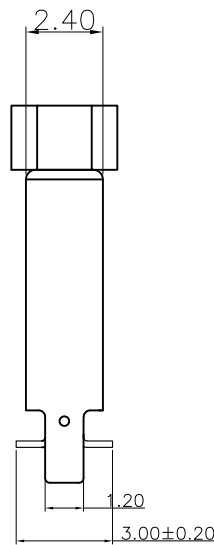

- 1.ELECTRICAL:
CURRENT:3A
CONTACT RESISTANCE:40 MILLIOHMS MAX
DIELECTRIC WITHSTANDING VOLTAGE: 200V AC
INSULATION RESISTANCE:100 MEGOHMS MIN
- 2.MECHANICAL:
MATING FORCE:5-20N
WITHDRAWAL FORCE:5-20N
DURBILITY:10000 CYCLES
- 3.ENVIRONMENTAL:
TEMPERTURE RANGE -40℃~105℃
SALT TESTING:48 HOURS

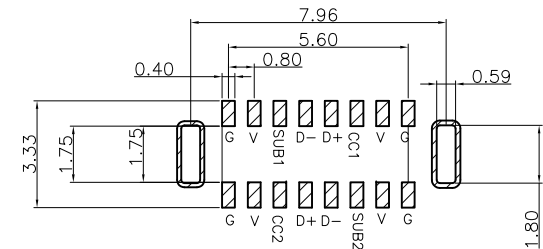

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm



Champyang International Ltd., Co

A1	RELEASED	Allen	2021-09-17
REV	DESCRIPTION.	APPD.	Date

FILE NO : AUC13 (Series)		TITLE 圖 名		USB CM 16PIN VERTICAL SMT, H= 8.65mm		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		PART NO. 料 號		AUC13-0116-141-S-A		SCALE 比例	1:1
		DRAWN BY 製 圖		Ray	DATE 日 期	2021-09-17	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日 期	2021-09-17	