

1

2

3

4

5

6

7

8

9

A

A

B

B

C

C

D



D

E





E

F


F

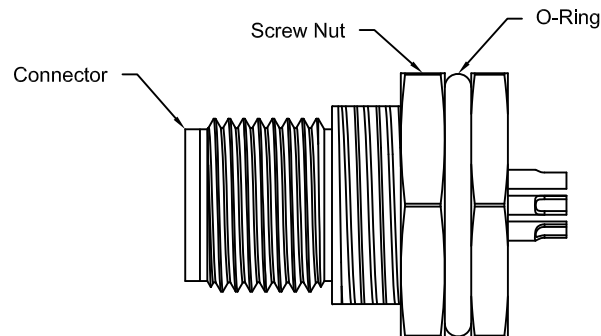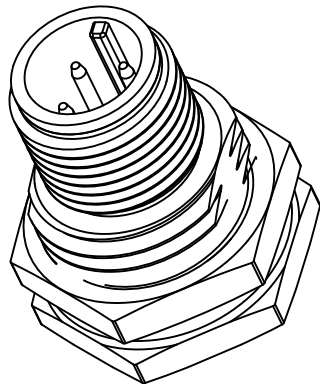**Note:**


- waterproof Rate : IPX7.
- Male Pin : Copper Alloy , Gold Plated.
- Shield : Zinc die casting alloy , Nickel Plated.
- Screw Nut : Copper Alloy , Nickel Plated.
- O-Ring:EPDM , Black.
- For Panel Thickness Max 4.5mm

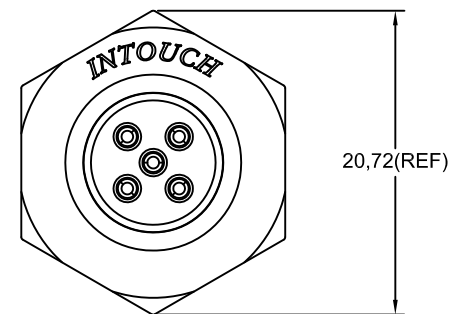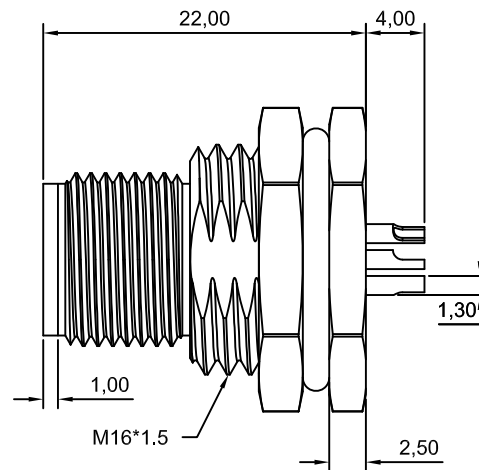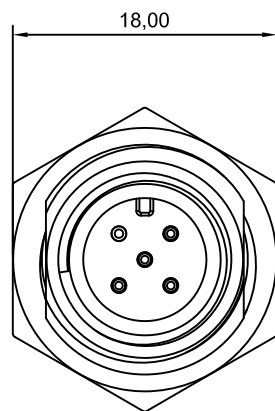

Pin Assignments Front View




Recommended Panel Cut-Out

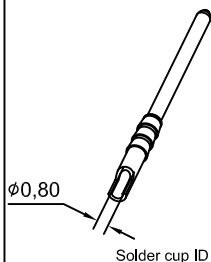

Solder cup ID

X	±
0.X	± 0.30
0.XX	± 0.20
0.XXX	± 0.10
X°	± 1.0°
0.X°	± 0.5°

A	2017/01/21
REV	DATE



APPROVED:

CHECKED:

GARY 2018/10/25

DRAWN:

GARY 2018/10/25

UNITS:

mm

SCALE:

Free



Champyang International Ltd., Co

TITLE:
12A-05PMMS-SF7001DWG NO:
12A-05PMMS-SF7001SHEET:
1 of 1REV:
A