

1

2

3

4

5

6


7

8

9


A

A

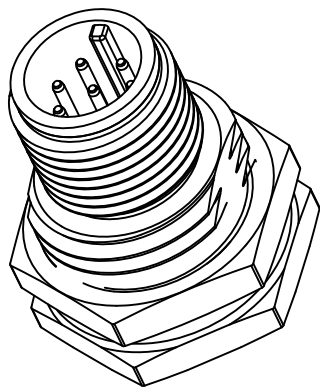

B

B

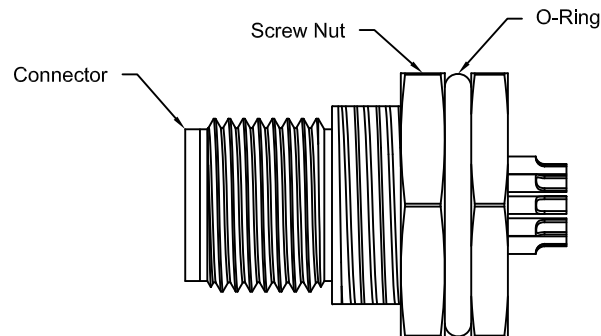


Note:

- waterproof Rate : IPX7.
- Housing: Thermoplastic, Glass fiber filled UL 94V-0
- Male Pin : Copper Alloy , Gold Plated.
- Shield : Zinc die casting alloy , Nickel Plated.
- Screw Nut : Copper Alloy , Nickel Plated.
- O-Ring:EPDM , Black
- For Panel Thickness Max 4.5mm



C

C

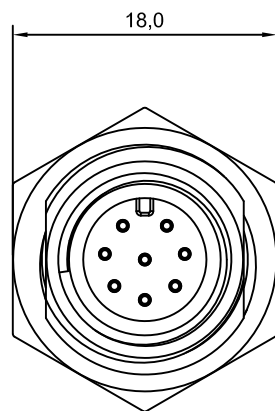


D

D

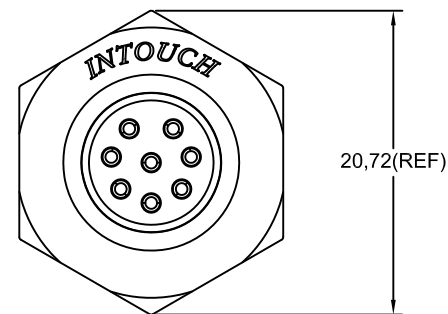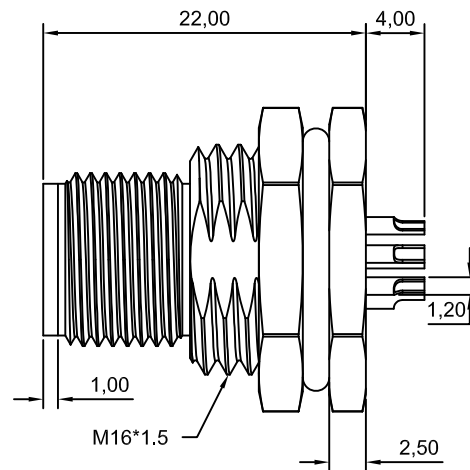


E


E



Pin Assignments Front View



Recommended Panel Cut-Out




Solder cup ID

F

F

X	±
0.X	± 0.30
0.XX	± 0.20
0.XXX	± 0.10
X°	± 1.0°
0.X°	± 0.5°

REV	DATE
A	2017/01/21



APPROVED:

CHECKED:

GARY 2018/10/25

DRAWN:

GARY 2018/10/25

UNITS:

mm

SCALE:

Free



Champyang International Ltd., Co

TITLE:
12A-08PMMS-SF7001

DWG NO:
12A-08PMMS-SF7001

SHEET:
1 of 1

REV:
A

1

2

3

4

5

6

7

8

9