

1

2

3

4

5

6


7

8

9


A

A

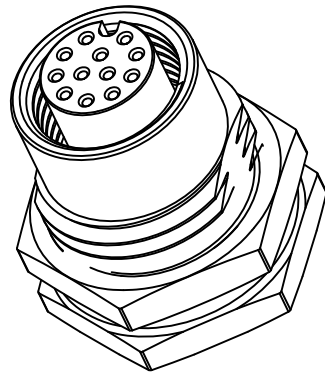

B


B

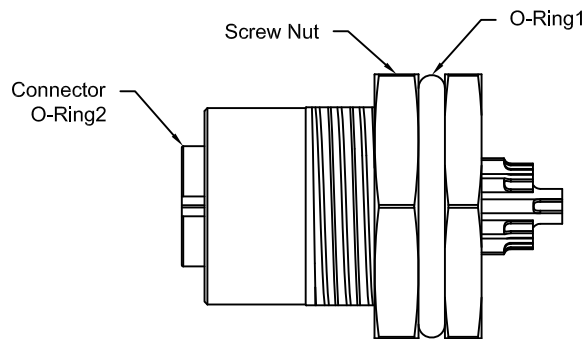**Note:**

- waterproof Rate : IPX7.
- Male Pin : Copper Alloy , Gold Plated.
- Shield : Zinc die casting alloy , Nickel Plated.
- Screw Nut : Copper Alloy , Nickel Plated.
- O-Ring1:EPDM
- O-Ring2:EPDM
- For Panel Thickness Max 4.5mm



C

C

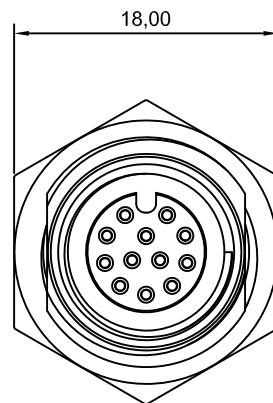


D

D

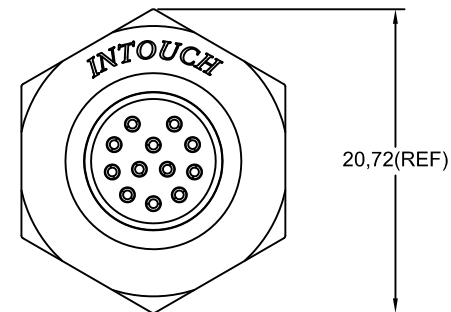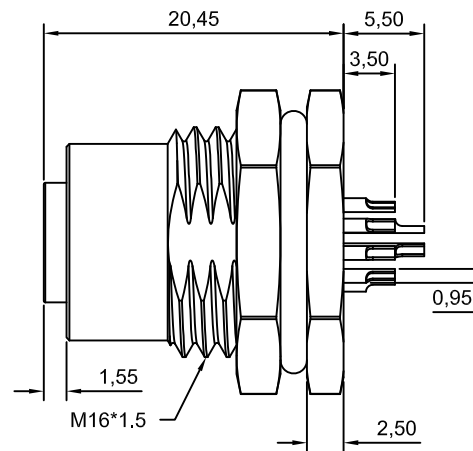


E


E



Pin Assignments Front View



Recommended Panel Cut-Out



F

F

		X	±	
		0.X	±	0.30
		0.XX	±	0.20
		0.XXX	±	0.10
		X°	±	1.0°
		0.X°	±	0.5°
A	2017/01/21			
REV	DATE			

APPROVED:	
CHECKED: GARY 2018/10/25	
DRAWN: GARY 2018/10/25	
UNITS:	SCALE:
mm	Free

Champanyang International Ltd., Co	
TITLE: 12A-12PFFS-SF7001	
DWG NO: 12A-12PFFS-SF7001	
SHEET: 1 of 1	REV: A

1

2

3

4

5

6

7

8

9