

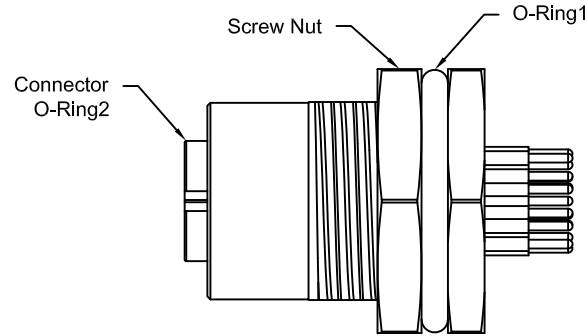
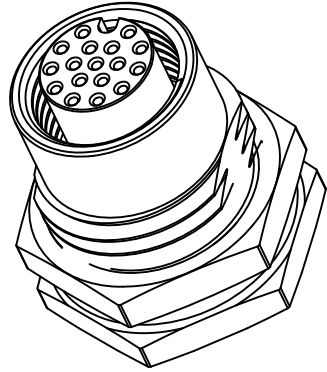
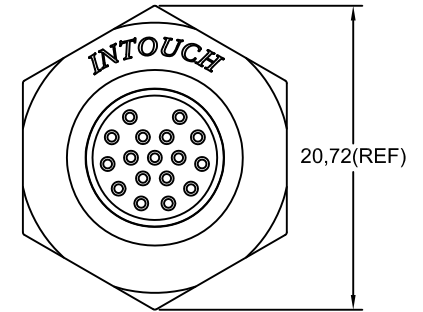


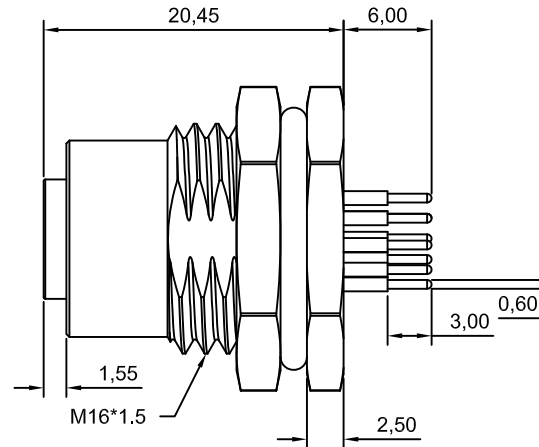


Note:


- waterproof Rate : IPX7.
- Pin : Copper Alloy , Gold Plated.
- Shield : Zinc die casting alloy , Nickel Plated.
- Screw Nut : Copper Alloy , Nickel Plated.
- O-Ring1:EPDM , Black.
- O-Ring2:EPDM
- For Panel Thickness Max 4.5mm
- Nut Torque : 4 - 6 kgf.cm.

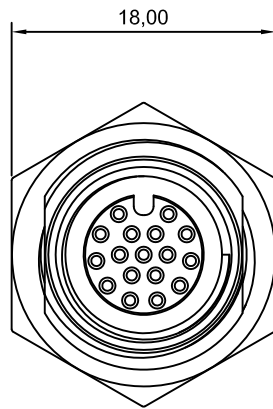


Pin Assignments Front View



Recommended Panel Cut-Out

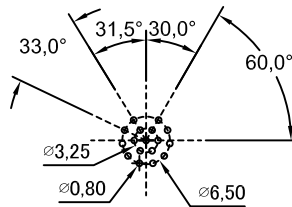

17 Pin Female Connector
Female Pin PCB Layout

		X	±	APPROVED:	 Champanyang International Ltd., Co TITLE: 12A-17PFFP-SF7001 DWG NO: 12A-17PFFP-SF7001 SHEET: 1 of 1 REV: A
		0.X	± 0.30	CHECKED:	
		0.XX	± 0.20	DRAWN:	
		0.XXX	± 0.10	GARY 2019/03/08	
		X°	± 1.0°	UNITS: mm SCALE: Free	
		0.X°	± 0.5°		
A	2019/03/08				
REV	DATE				