

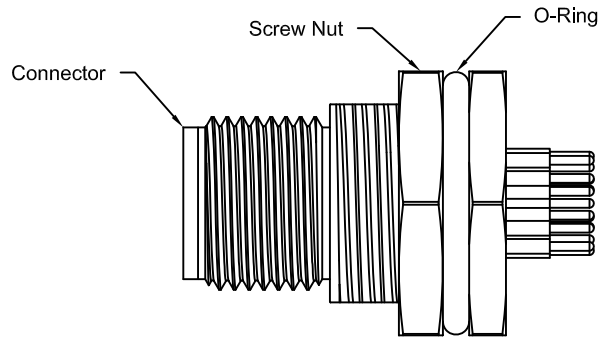
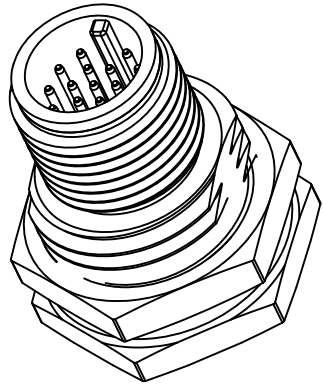

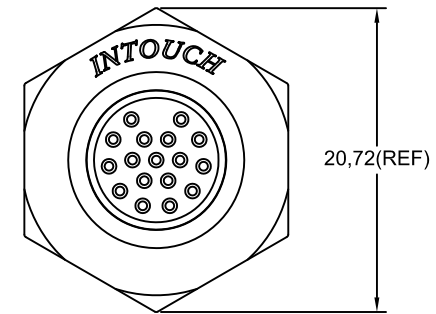


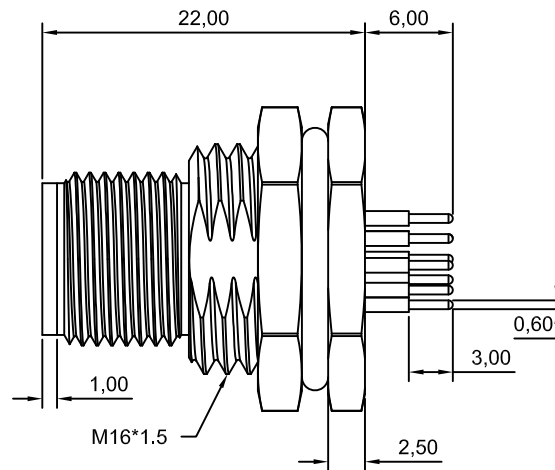


Note:


- waterproof Rate : IPX7.
- Male Pin : Copper Alloy , Gold Plated.
- Shield : Zinc die casting alloy , Nickel Plated.
- Screw Nut : Copper Alloy , Nickel Plated.
- O-Ring:EPDM , Black.
- For Panel Thickness Max 4.5mm
- Nut Torque : 6 - 8 kgf.cm.

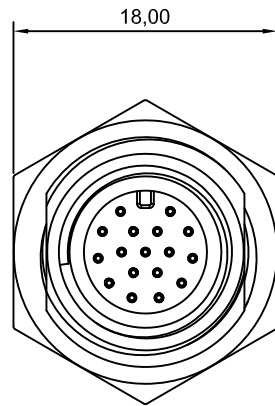

Pin Assignments Front View



Recommended Panel Cut-Out

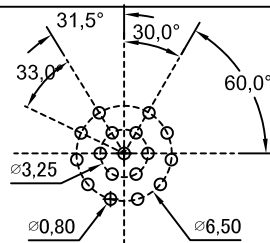

17 Pin Male Connector
Male Pin PCB Layout

		X	±
		0.X	± 0.30
		0.XX	± 0.20
		0.XXX	± 0.10
		X°	± 1.0°
		0.X°	± 0.5°
A	2019/03/08		
REV	DATE		

APPROVED:	
CHECKED:	
DRAWN: GARY 2019/03/08	
UNITS:	SCALE:
mm	Free

 Champyang International Ltd., Co	
TITLE: 12A-17PMMP-SF7001	
DWG NO: 12A-17PMMP-SF7001	
SHEET: 1 of 1	REV: A