

SPECIFICATIONS

- DVI
- Operation Voltage: 40 VAC(RMS) Max.
- Current Rating: 1.5 Ampere per Contact
- Contact Resistance(UPPER): 30 Milliohms Max.
Contact Resistance(LOWER): 20 Milliohms Max.
- Insulation Resistance: 1000 Megohms Min.
- Dielectric Withstanding Voltage: 500V DC(RMS)
- Total Mating Force: 4.5 Kgf Max.
- Total Unmating Force: 1.0 Kgf Min.
- Operating Temperature: -55°C to +85°C

NOTES

- MATERIAL:
Housing(UPPER):LCP Halogen-free, Color:Black.
Housing(LOWER):LCP Halogen-free, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Shield:Stainless Steel.
Boardlock:Copper Alloy.
Bracket:Zinc Alloy.
- FINISH:
Terminal:Selective Au in Contact Area,
100u" MIN. Tin Plated in Solder Area,
50u" MIN. Nickel Underplated Overall.
Shell: 50u" MIN, Nickel Plated Overall.
Boardlock:Tin Plated.
Bracket:Nickel Plated.
- This Product is RoHs & HALOGEN-FREE Compliance Product.



Champyang International Ltd., Co

FILE NO : ADV01 (Series)

TITLE
圖 名

DVI-D / DVI-I FEMALE RIGHT ANGLE

UNIT
單位 mm
inch

TOLERANCE(公差):
0.000 mm $\pm$ 0.13 mm
0.00 mm $\pm$ 0.25 mm
Ang: 0.0 = $\pm$ 2°

PART NO.
料 號

ADV01-F2F4C-1x2L112H1

SCALE
比例 1 : 1

DRAWN BY
製 圖

Ben

DATE
日期

2019-10-04



REV.
版本 A0

CHECKED BY
審 核

Allen

DATE
日期

2019-10-04

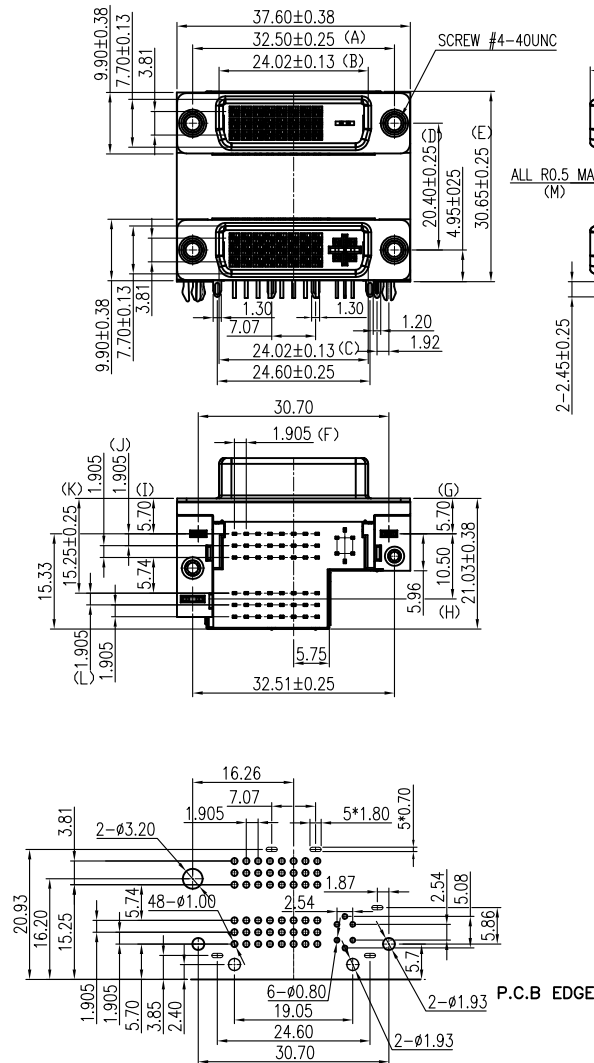

INSPECTION DIMENSION:(A)~(N)

A0	RELEASED	Allen	2019-10-04
REV	DESCRIPTION.	APPD.	Date

A

B

C

D