



MECHANICAL:

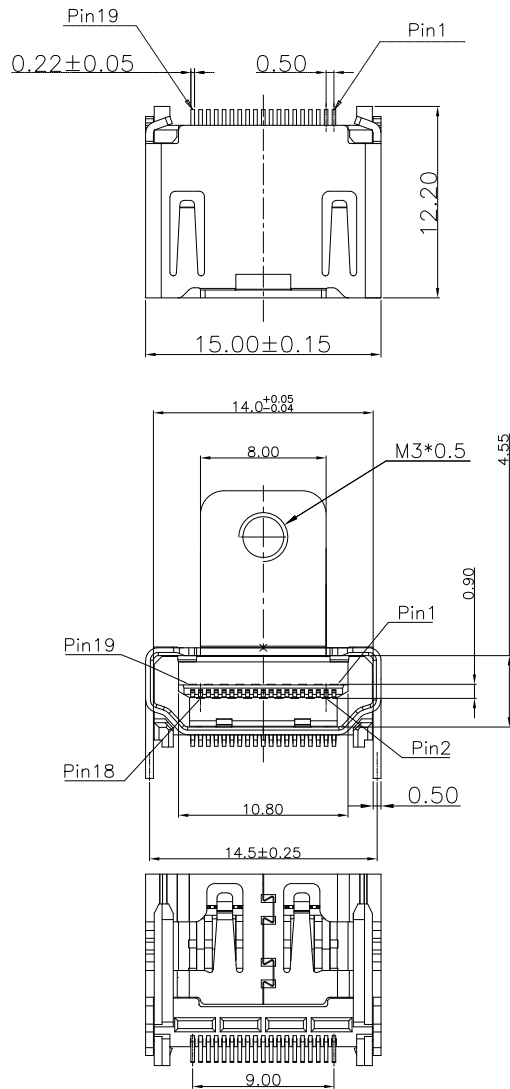

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS
 - CURRENT RATING: 0.5 AMP
 - VOLTAGE RATING: 40 V
 - CONTACT RESISTANCE: 30MILLIOHMS MAX
 - INSULATION RESISTANCE:100M MIN.@500V DC
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 4.5KGF MAX.
 - WITHDRAWING FORCE : 1KGF ~ 4KGF.
- LIFE TEST: 10000 CYCLES
- OPERATING TEMPERATURE: -25°C TO +85°C

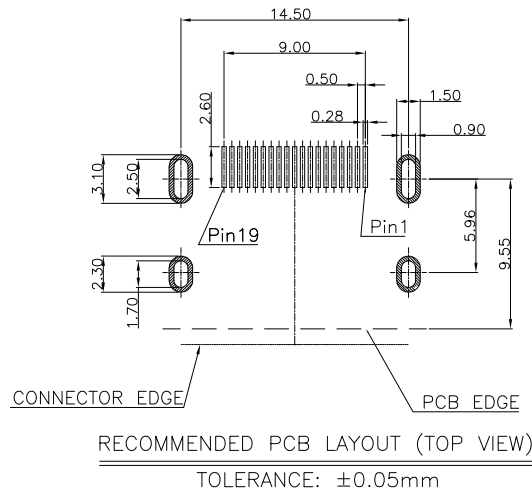

Champyang International Ltd., Co

A0	RELEASED	Allen	2022-03-09
REV	DESCRIPTION.	APPD.	Date

FILE NO: AHD01 (Series)		TITLE 圖 名		HDMI SMT Molding式銅殼鍍線 殼腳長2.1, 有耳, 螺孔高13.38, 端子Fu"金, 霧錫		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料 號		AHD01-34F-CR-C1		SCALE 比例	1:1
		DRAWN BY 製 圖		Ray	DATE 日 期	2022-03-09	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日 期	2022-03-09	