
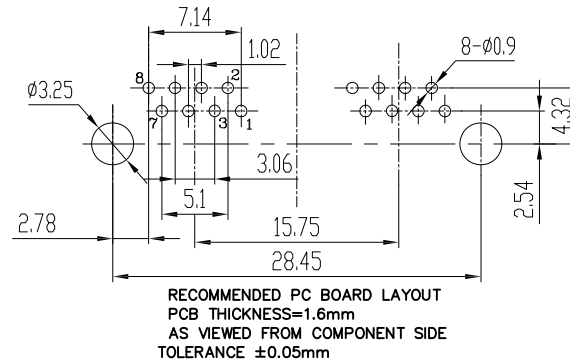
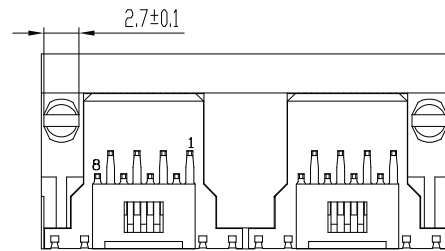
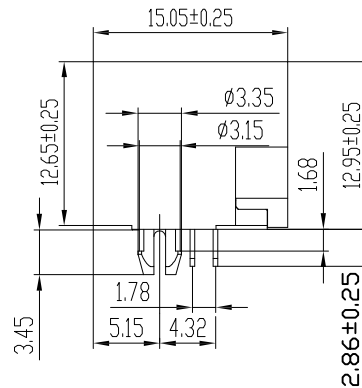


MECHANICAL:

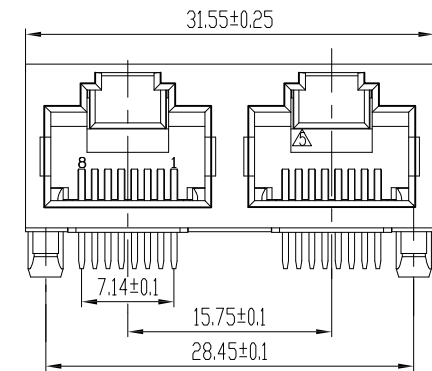

SPECIFICATION NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 30mΩ MAX.
- INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
- DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

- HOUSING/INSERT MATERIAL:
THERMOPLASTIC, PA46 UL94V-0,COLOR BLACK
- CONTACT MATERIAL:PHOSPHOR BRONZE T=0.35
- PLATING:GOLD PLATING OVER NICKEL, PLATED
NICKEL 30-50U". SN 100-120U. GOLD PLATED
ON CONTACT AREA 6U"
- OPERATING LIFE:750 CYCLES MIN.

ENVIRONMENTAL:

- STORAGE:-40° C TO +85° C
- OPERATION: 0° C TO 75° C



Champyang International Ltd., Co

AO	RELEASED	Allen	2021-04-06
REV	DESCRIPTION.	APPD.	Date

FILE NO : ARJ04 (Series)		TITLE 圖 名		Unshielded RJ45 Modular Jack, Through Hole Type, 1X2 Ports		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		PART NO. 料 號		ARJ04-020808-F21-B		SCALE 比例	1:1
		DRAWN BY 製 圖		Ray	DATE 日 期	2021-04-06	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日 期	2021-04-06	