


NOTE:

A. MATERIAL:

1. Housing: PA9T UL94V-0 Blue
2. Cover: PA9T UL94V-0 Blue
3. Contact: Copper Alloy
4. Shell: SUS201
5. Middle Spring: SUS201

B. PLATING:

1. Contact: Contact Area Gold Plated
Solder Area Sn(80u"Min) Plated
Under Plated Nickel(45u"Min)
2. Shell: Nickel(40u"Min) Plated

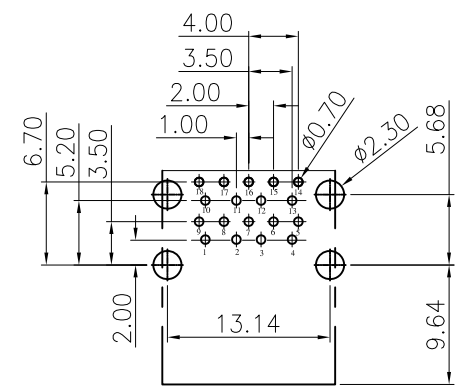

RECOMMENDED P.C.B HOLE LAYOUT
TOP VIEW(TOLERANCE:±0.05)

Pin Number	Signal Name
1/10	VBUS
2/11	D-
3/12	D+
4/13	GND
5/14	SSRX-
6/15	SSRX+
7/16	GND
8/17	SSTX-
9/18	SSTX+
Shell	Shield



Champyang International Ltd., Co

AO	RELEASED	Allen	2020-10-27
REV	DESCRIPTION.	APPD.	Date

FILE NO : AU308 (Series)		TITLE 圖名		雙層 USB3.0 AF 90° DIP 彎腳 捲邊		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		PART NO. 料號		AU308-0209-F32-B		SCALE 比例	1:1
		DRAWN BY 製圖		Ben	DATE 日期	2020-10-27	REV. 版本
		CHECKED BY 審核		Allen	DATE 日期	2020-10-27	⊙