
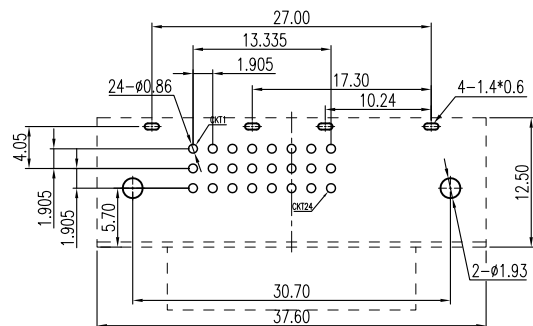
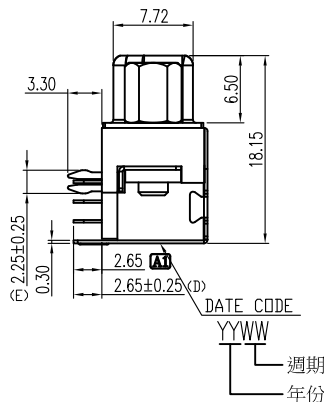
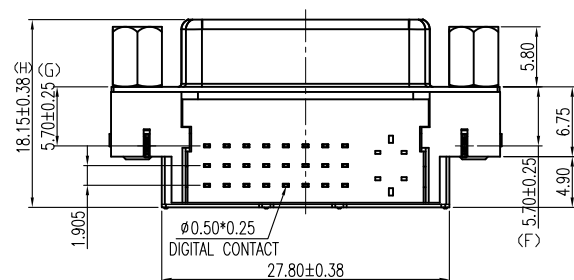



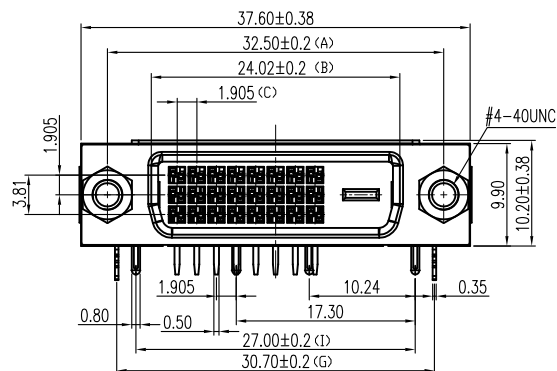

RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION(A)~(I)

SPECIFICATIONS

- DVI
 - Voltage: 40 VAC(RMS) Max.
 - Current Rating: 1.5 Ampere per Contact
 - Contact Resistance: 20 Milliohms Max.
 - Insulation Resistance: 1000 Megohms Min.
 - Dielectric Withstanding Voltage: 500V DC(RMS)
 - Total Mating Force: 4.5 Kgf Max.
 - Total Unmating Force: 1.0 Kgf Min.
 - Operating Temperature: -55°C to +85°C

NOTES

- MATERIAL:
Housing:PBT, UL 94V-0, Color:Ivory.
Latch:PA66, UL 94V-0, Color:Ivory.
Terminal:Copper Alloy.
Shell:SPCC.
Shield:SPCC.
Boardlock:Steel.
Rivet:Copper Alloy.
Screw:Steel.
- FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Rivet:Nickel Plated.
Screw:Nickel Plated.
- This Product is RoHs Compliance Product.



Champyang International Ltd., Co

A0	RELEASED	Allen	2019-10-07
REV	DESCRIPTION.	APPD.	Date

FILE NO : ADV02 (Series)		TITLE 圖 名		DVI-D RIGHT ANGLE		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.13 mm 0.00 mm ± 0.25 mm		PART NO. 料 號		ADV02-V2S-1x22E42N4-F		SCALE 比例	1 : 1
		DRAWN BY 製 圖		Ben	DATE 日期	2019-10-07	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日期	2019-10-07	