
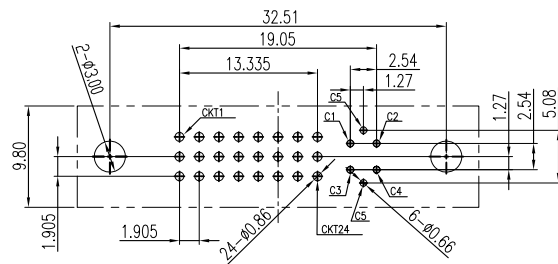

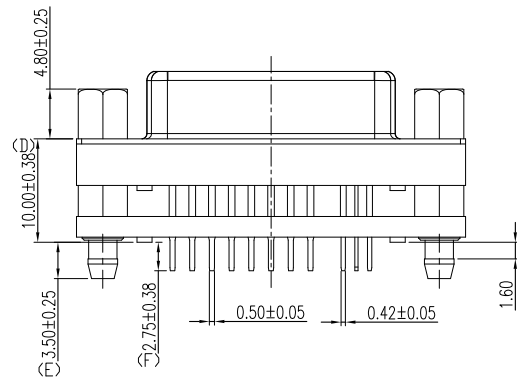


SPECIFICATIONS


- DVI-I
- Voltage: 40 VAC(RMS) Max.
- Current Rating: 1.5 Ampere per Contact
- Contact Resistance: 20 Milliohms Max.
- Insulation Resistance: 1000 Megohms Min.
- Dielectric Withstanding Voltage: 500V DC(RMS)
- Total Mating Force: 4.5 Kgf Max.
- Total Unmating Force: 1.0 Kgf Min.
- Operating Temperature: -20°C to +85°C

NOTES

- MATERIAL:
Housing:LCP, UL 94V-0, Color:Ivory.
Terminal:Brass.
Shell:SPCC
Boardlock:Free-cutting Brass.
Screw:Free-cutting Brass.
- FINISH:
Terminal:Selected Gold Plated in Contact Area,
100u" MIN. Matte Tin Plated in Solder Area,
50u" MIN. Nickel Underplated Overall.
Shell:Nickel Plated 80u" MIN, Over Cu 50u" MIN.
Boardlock:Tin Plated 100u" MIN, Over Nickel
50u" MIN.
Screw:Nickel Plated 60u" MIN, Overall.
- This Product is RoHS Compliance Product.

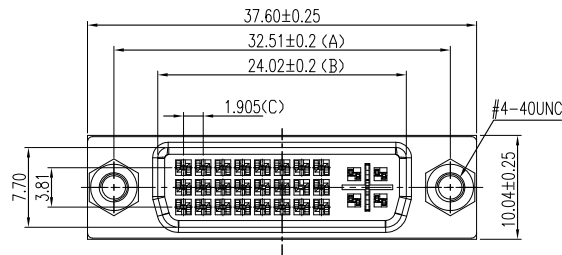

RECOMMENDED PCB LAYOUT
INSPECTION DIMENSION:(A)~(F)

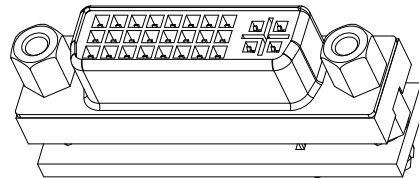

Champyang International Ltd., Co

				FILE NO: ADV03 (Series)	TITLE 圖 名	DVI VERTICAL 10mm 29PIN FEMALE			UNIT 單位	mm inch	
					TOLERANCE(公差): 0.000 mm ± 0.13 mm 0.00 mm ± 0.25 mm ANGULAR ±2°	PART NO. 料 號	ADV03-V4S-1x2HA44D0			SCALE 比例	1 : 1
A0	RELEASED	Allen	2019-10-07	DRAWN BY 製 圖		Ben	DATE 日 期	2019-10-07		REV. 版 本	A0
REV	DESCRIPTION.	APPD.	Date	CHECKED BY 審 核		Allen	DATE 日 期	2019-10-07			
A		B		C	D			Page: 1of 2			