
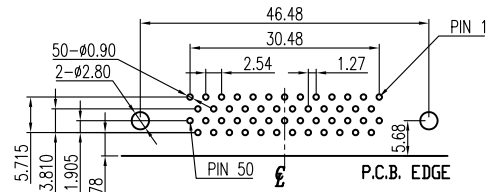
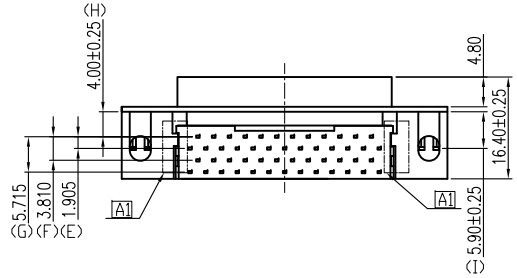


SPECIFICATIONS

- 1. SCSI
- 1.1 Current Rating: 1 Ampere per Contact
- 1.2 Contact Resistance: 35 Milliohms Max.
- 1.3 Insulation Resistance: 1000 Megohms Min.
- 1.4 Dielectric Withstanding Voltage: 500V DC(RMS)
- 1.5 Total Mating Force: 17.7 Kgf Max.
- 1.6 Total Unmating Force: 1.6 Kgf Min.
- 1.7 Operating Temperature: -55°C to +85°C

NOTES

- 1. MATERIAL:
 - Housing:PBT, UL 94V-0, Color:Black.
 - Terminal:Copper Alloy.
 - Shell:Zinc Alloy.
 - Boardlock:Copper Alloy.
- 2. FINISH:
 - Terminal:Gold Plated over Nickel at Contact Area.
 - Tin Plated over Nickel at Solder Ared.
 - Shell:Nickel Plated.
 - Boardlock:Tin Plated.
- 3. This Product is LEAD-FREE & RoHS Compliance Product.

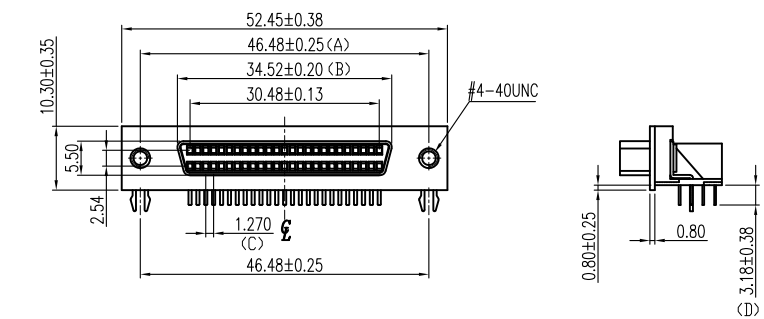

RECOMMENDED P.C.B. LAYOUT
INSPECTION DIMENSION:(A)~(I)



Champyang International Ltd., Co

A0	RELEASED	Allen	2019-10-07
REV	DESCRIPTION.	APPD.	Date

FILE NO: ASR02 (Series)		TITLE 圖名		SCSI II PIN TYPE RIGHT ANGLE		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.13 mm 0.00 mm ± 0.25 mm		PART NO. 料號		ASR02-50S-2x22112N0		SCALE 比例	1:1
ANGULAR ±2°		DRAWN BY 製圖	Ben	DATE 日期	2019-10-07	REV. 版本	A0
		CHECKED BY 審核	Allen	DATE 日期	2019-10-07		