

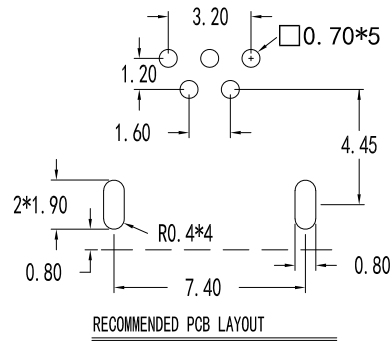

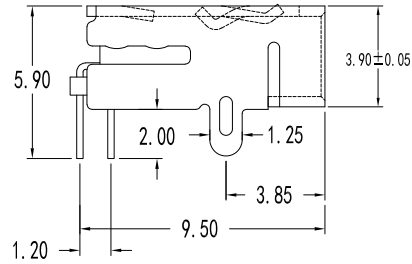



MECHANICAL :



Specifications:

Electrical:

- Current Rating:
1.0A/contact terminal
- Voltage Rating:
30V DC
- Contact Resistance:
50 milliohms MAX
- Dielectric Withstanding Voltage:
300 V AC AT Sea Level
- Insulation Resistance:
100MEGA ohms MIN

Raw material:

- Plastic cement:
Hing Temperature Thermoplastics,
LCP Black
- Contact: Copper Alloy C2680/C5191
- Shell: Copper Alloy C2680

Electroplate:

- Contact: Plated Gold in Mating Area;
Tin On Solder Talls
- Shell:
Nickel Plating



Champyang International Ltd., Co

AO	RELEASED	Allen	2021-12-17
REV	DESCRIPTION.	APPD.	Date

FILE NO : ANU03 (Series)		TITLE 圖名		Mini USB AB Type DIP SHIELEED, SIDE ENTRY		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料號		ANU03-0105-F41-S11-A		SCALE 比例	1:1
		DRAWN BY 製圖		Ray	DATE 日期	2021-12-17	REV. 版本
		CHECKED BY 審核		Allen	DATE 日期	2021-12-17	