

L K J I H

3

2

1

4

5







6

SPECIFICATIONS

- 1. USB
 - 1.1 Operation Voltage: 250 VAC(RMS) Max.
 - 1.2 Current Rating: 1.5 Ampere per Pontact
 - 1.3 Contact Resistance: 30 Milliohms Max.
 - 1.4 Insulation Resistance: 1000 Megohms Min.
 - 1.5 Dielectric Withstanding Voltage: 750 VAC(RMS)
 - 1.6 Total Mating Force: 3.57 Kgf Max.
 - 1.7 Total Unmating Force: 1.02 Kgf Min.
 - 1.8 Operating Temperature: -55°C to +85°C
- 2. ESATA
 - 2.1 Voltage: 100 VAC(RMS) Max.
 - 2.2 Current Rating: 1.5 Ampere per Contact
 - 2.3 Contact Resistance: 30 Milliohms Max.
 - 2.4 Insulation Resistance: 1000 Megohms Min.
 - 2.5 Dielectric Withstanding Voltage: 500V AC
 - 2.6 Total Mating Force: 4.0 Kgf Max.
 - 2.7 Total Unmating Force: 1.0 Kgf Min.
 - 2.8 Operating Temperature: -55°C to +85°C

NOTES

- 1. MATERIAL:
 - Housing(USB):PBT, UL 94V-0, Color:Black.
 - Housing(ESATA):PBT, UL 94V-0, Color:Red.
 - Terminal:Copper Alloy.
 - Shield:Stainless Steel.
 - Shell(ESATA):Steel.
- 2. FINISH:
 - Terminal(USB): Gold Plated over Nickel at Conatct Area.
Tin Plated over Nickel at Solder Area.
 - Terminal(ESATA): Gold Plated over Nickel at Conatct Area.
Tin Plated over Nickel at Solder Area.
 - Shield: Solderable Nickle Plated.
 - Shell(ESATA): Solderable Nickle Plated.
- 3. This Product is RoHs Compliance Product.

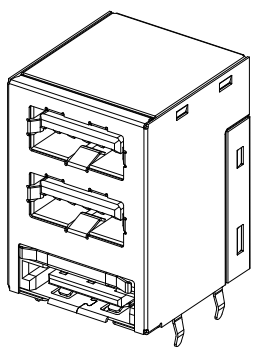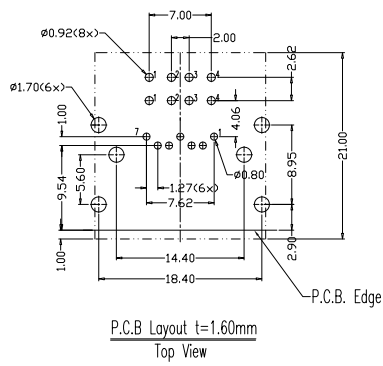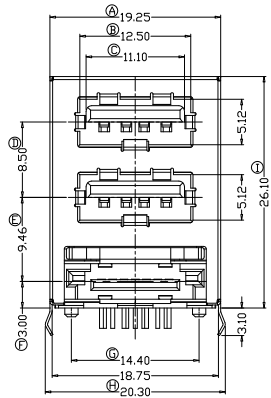

Champyang International Ltd., Co

A0	RELEASED	Allen	2019-10-04
REV	DESCRIPTION.	APPD.	Date

FILE NO : ACB06 (Series)		TITLE 圖名		2-PORT USB 4-POS. FEMALE / ESATA 7-POS. MALE DIP TYPE		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.13 mm 0.00 mm ± 0.25 mm Ang: 0.0 = ±2°		PART NO. 料號		ACB06-U2EA-1x800S2N0		SCALE 比例	1 : 1
		DRAWN BY 製圖		Ben	DATE 日期	2019-10-04	REV. 版本
		CHECKED BY 審核		Allen	DATE 日期	2019-10-04	A0