


RECOMMENDED P.C.B LAYOUT
INSPECTION DIMENSION(A)~(I)

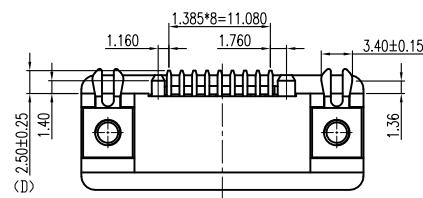

SPECIFICATIONS

- D-SUB
- 1.1 Voltage: 250 VAC(RMS) Max.
- 1.2 Current Rating: 3 Ampere per Contact
- 1.3 Contact Resistance: 25 Milliohms Max.
- 1.4 Insulation Resistance: 1000 Megohms Min.
- 1.5 Dielectric Withstanding Voltage: 500 VAC(RMS)
- 1.6 Total Mating Force: 4.0 Kgf Max.
- 1.7 Total Unmating Force: 1.0 Kgf Min.
- 1.8 Operating Temperature: -55°C to +105°C

NOTES

- MATERIAL:
Housing:PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:SPCC.
Boardlock:Copper Alloy.
Rivet:Copper Alloy.
Screw:Copper Alloy.
- FINISH:
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
Rivet:Nickel Plated.
Screw:Nickel Plated.
- This Product is RoHs Compliance Product.



Champyang International Ltd., Co

A0			
REV	RELEASED	Allen	2019-07-15
	DESCRIPTION.	APPD.	Date

FILE NO : ADA03 (Series)		TITLE 圖 名		SLIM D-SUB 9 MALE CONNECTOR DIP SOLDER, RIGHT ANGLE		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.13 mm 0.00 mm ± 0.25 mm		PART NO. 料 號		ADA03-09M-1122N12NP		SCALE 比例	1 : 1
		DRAWN BY 製 圖		Ben	DATE 日期	2019-07-15	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日期	2019-07-15	