




SECTION A-A

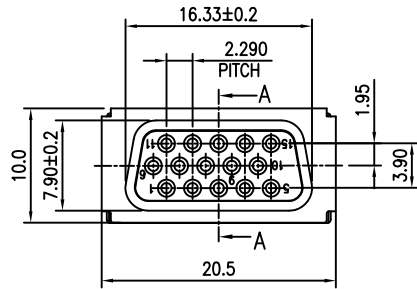

MATERIAL:

- Ⓐ HOUSING: THERMOPLASTIC, GLASS FIBER FILLED.
UL 94V-0 RATED.
- Ⓑ SPACER: THERMOPLASTIC, GLASS FIBER FILLED.
UL 94V-0 RATED.
- Ⓒ CONTACT: C5191R-H (t=0.30mm).
- Ⓓ FRONT SHIELD: SPCC (t=0.40mm).

FINISH:

CONTACT: UNDER PLATED 50u" MIN. NICKEL ALL
OVER 100u" MIN. MATTE TIN IN SOLDERING
AREA GOLD PLATED IN CONTACT AREA.
FRONT SHIELD: NICKEL PLATED WITH 100u" THICK.



Champyang International Ltd., Co

A0	RELEASED	Allen	2019-05-16
REV	DESCRIPTION.	APPD.	Date

FILE NO : ADA04(Series)		TITLE 圖名		D-SUB 15 FEMALE HIGH DENSITY CONNECTOR 3Row CL=0.8mm		UNIT 單位	mm inch
TOLERANCE(公差): 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料號		ADA04-15F-5122-1x		SCALE 比例	1:1
		DRAWN BY 製圖	Ben	DATE 日期	2019-05-16	REV. 版本	A0
		CHECKED BY 審核	Allen	DATE 日期	2019-05-16		