





MECHANICAL:

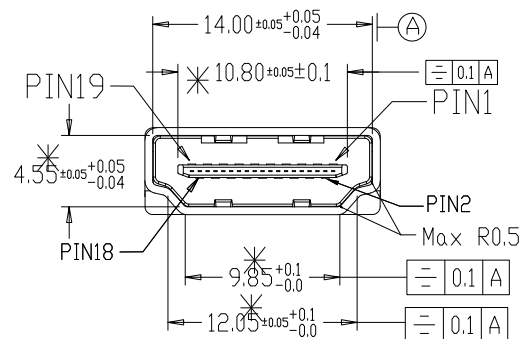

RECOMMENDED PCB LAYOUT T=1.60
GENERAL TOLERANCES: ±0.05



NOTES:

1.ELECTRONIC:

CONTACT RESISTANCE: 20mohm MAX

INSULATION RESISTANCE: 1000 Mohm MIN

WITHSTAND VOLTAGE: AC 500V, 1min.

2.MECHANICAL:

DURABILITY: 10000 CYCLE.

3.ENVIRONMENT CHARACTERISTICS:

OPERATING TEMPERATURE: -55°C TO +105°C

4.RECOMMANDER PCB THICKNESS 1.2 TO 1.60MM

3	SHELL	1	COPPER ALLOY C2680 T=0.50	NI PLATED
2	CONTACT	19	COPPER ALLOY T=0.20	AU/TIN PLATED
1	HOUSING	1	THERMOPLASTIC	(UL 94V-0)BLACK
No.	PART NAME	QTY	MATERIAL	REMARK



Champyang International Ltd., Co

A0	RELEASED	Allen	2019-06-27
REV	DESCRIPTION.	APPD.	Date

FILE NO :	AHD02 (Series)	TITLE	圖 名	HDMI19P FEMALE 夾板 1.60mm	UNIT	mm
TOLERANCE(公差):	0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO.	料 號	AHD02-341-CR	SCALE	1 : 1
		DRAWN BY	製 圖	Ben	DATE	2019-06-27
		CHECKED BY	審 核	Allen	DATE	2019-06-27

