

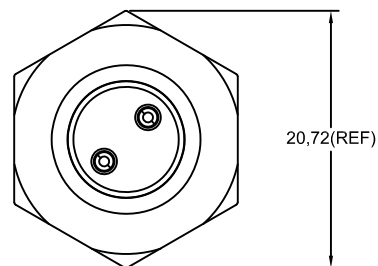
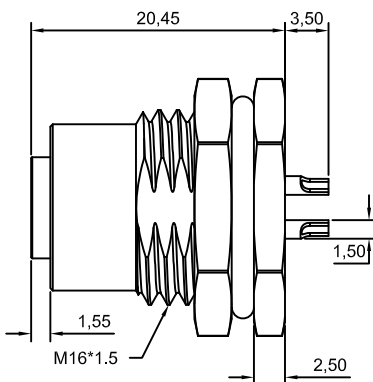


Note:


- waterproof Rate : IPX7.
- Male Pin : Copper Alloy , Gold Plated.
- Shield : Zinc die casting alloy , Nickel Plated.
- Screw Nut : Copper Alloy , Nickel Plated.
- O-Ring1:EPDM , Black.
- O-Ring2:EPDM
- For Panel Thickness Max 4.5mm



Pin Assignments Front View



Recommended Panel Cut-Out



Solder cup ID



Champyang International Ltd., Co

FILE NO : AM12

TITLE
圖 名

M12, 2Pin, Female, Front Lock,
For Cable type, Waterproof

UNIT
單位

mm
inch

TOLERANCE(公差) :

0.000 mm $\pm$ 0.10 mm
0.00 mm $\pm$ 0.20 mm
0.0 mm $\pm$ 0.30 mm
x° $\pm$ 1.0°
0.x° $\pm$ 0.5°

PART NO.
料 號

AM12-02PFFS-SF7001-A

SCALE
比例

1 : 1

DRAWN BY
製 圖

Ben

DATE
日期

2019-10-31

REV.
版本

A0

CHECKED BY
審 核

Allen

DATE
日期

2019-10-31

