

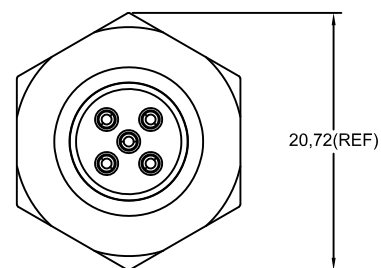
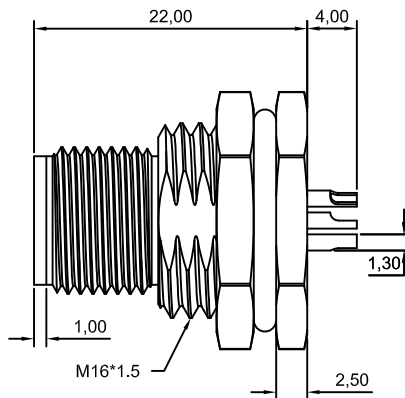


Note:


- waterproof Rate : IPX7.
- Male Pin : Copper Alloy , Gold Plated.
- Shield : Zinc die casting alloy , Nickel Plated.
- Screw Nut : Copper Alloy , Nickel Plated.
- O-Ring: EPDM , Black.
- For Panel Thickness Max 4.5mm



Pin Assignments Front View



Recommended Panel Cut-Out



Solder cup ID



Champyang International Ltd., Co

FILE NO : AM12

TITLE
圖 名

M12, 5Pin, Male, Front Lock,
For Cable type, Waterproof

UNIT
單位

mm
inch

TOLERANCE(公差) :

0.000 mm $\pm$ 0.10 mm

0.00 mm $\pm$ 0.20 mm

0.0 mm $\pm$ 0.30 mm

x° $\pm$ 1.0°

0.x° $\pm$ 0.5°

PART NO.
料 號

AM12-05PMMS-SF7001-A

SCALE
比例

1 : 1

DRAWN BY
製 圖

Ben

DATE
日期

2019-10-31

REV.
版本


A0

CHECKED BY
審 核

Allen

DATE
日期

2019-10-31



RELEASED

Allen

2019-10-31

DESCRIPTION.

APPD.

Date

REV

A

B

C

D

Page : 1 of 1