

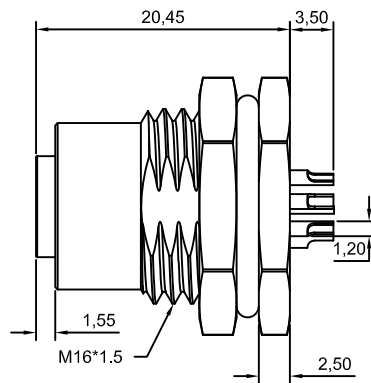

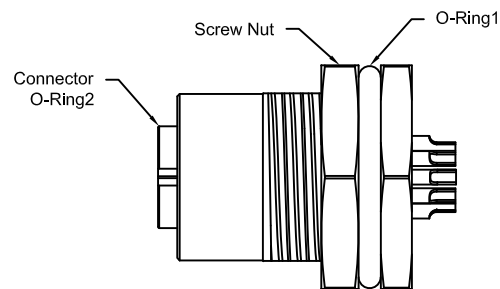


Note:


- waterproof Rate : IPX7.
- Female Pin : Copper Alloy , Gold Plated.
- Shield : Copper Alloy , Nickel Plated.
- Screw Nut : Copper Alloy , Nickel Plated.
- O-Ring1:EPDM
- O-Ring2:EPDM
- For Panel Thickness Max 4.5mm



Pin Assignments Front View




Recommended Panel Cut-Out



Solder cup ID



Champyang International Ltd., Co

				FILE NO : AM12	TITLE 圖 名	M12, 8Pin, Female, Front Lock, For Cable type, Waterproof			UNIT 單位	mm inch	
					TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.20 mm 0.0 mm ± 0.30 mm x° ± 1.0° 0.x° ± 0.5°	PART NO. 料 號	AM12-08PFFS-SF7001-A			SCALE 比例	1 : 1
						DRAWN BY 製 圖	Ben	DATE 日 期	2019-10-31	REV. 版 本	A0
						CHECKED BY 審 核	Allen	DATE 日 期	2019-10-31		
AO REV	RELEASED		Allen	2019-10-31							
	DESCRIPTION.		APPD.	Date							
A		B		C		D			Page : 1 of 1		