

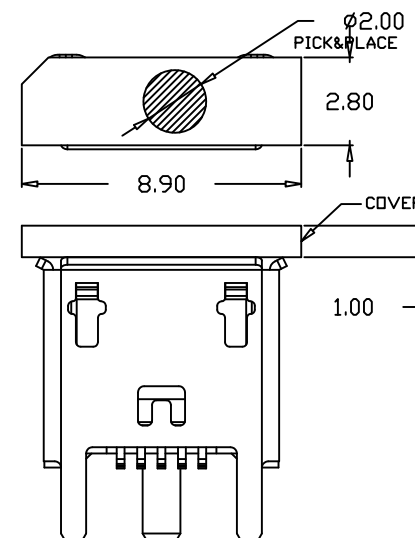
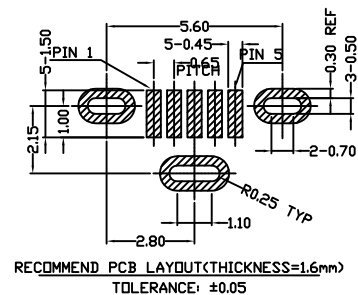



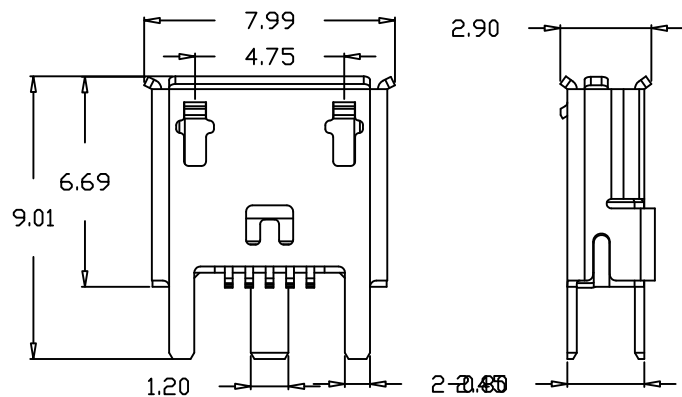

Notes:

Specifications:

1. Current rating: 1 A Max.
2. Dielectric withstanding:voltage: 100V(AC) for 1 min.
3. Contact resistance: 50m Ω Max.
4. Insulation resistance: 100M Ω Min.
5. Total mating force: 3.57 Kgf Max.
6. Total unmating force: 1.0 Kgf Min.0.81~2.05 Kgf Min.after 10000 insertion/extraction cycles
7. Temperature range: -30°C~+80°C



Champyang International Ltd., Co

A0			
	RELEASED	Allen	2018-11-25
REV	DESCRIPTION.	APPD.	Date

FILE NO : AMU01(Series)		TITLE 圖 名		MICRO USB 5 PIN SMT, TOP ENTRY WITH COVER		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm $\pm$ 0.075 mm 0.00 mm $\pm$ 0.15 mm 0.0 mm $\pm$ 0.25 mm		PART NO. 料 號		AMU01-0105-F41		SCALE 比例	1:1
		DRAWN BY 製 圖	Kiddy	DATE 日期	2018-11-25	REV. 版本	A0
		CHECKED BY 審 核	Allen	DATE 日期	2018-11-25		