
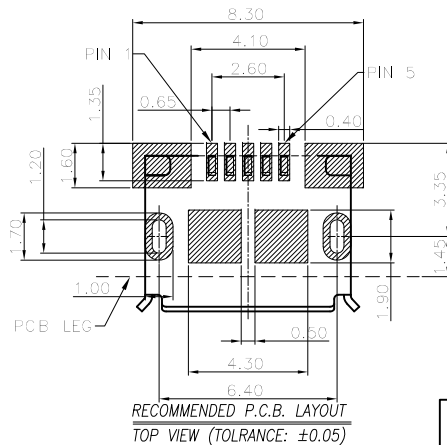

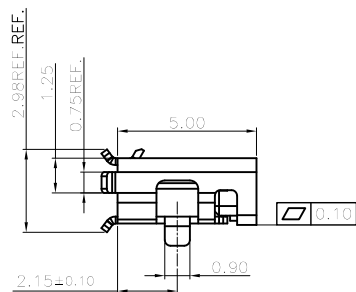
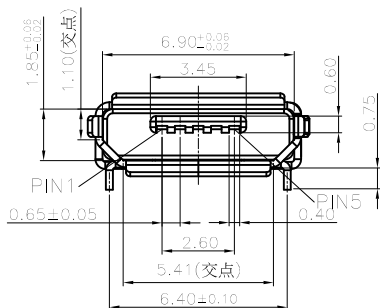





NOTES:

1. MATERIAL:

INSULATOR: HI-TEMP PLASTIC UL 94V-0; BLACK.

CONTACT: COPPER ALLOY(T=0.15MM).

SHELL: SUS201/304(T=0.25MM).

2.FINISH:

CONTACT: Au PLATED ALL OVER NICKEL

SHELL: MATTE Sn PLATED OVER NICKEL

3. ELECTRICAL CHARACTERISTICS:

CURRENT RATING: 1.0 A

VOLTAGE RATING: 30 V

DIELECTRIC WITHSTANDING VOLTAGE: AC500V R.M.S.

INSULATION RESISTANCE: 100 MΩ MINIMUM.

CONTACT RESISTANCE: 30 mΩ MAXIMUM.

4. ENVIRONMENTAL:

OPERATING TEMPERATURE: -20°C~+85°C.



Champyang International Ltd., Co

A0			
REV	RELEASED	Allen	2018-11-29
	DESCRIPTION.	APPD.	Date

FILE NO: AMU02 (Series)		TITLE 圖 名		MICRO USB 5 PIN, NO POST SMT, SIDE ENTRY		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料 號		AMU02-0105-F41-S21		SCALE 比例	1 : 1
		DRAWN BY 製 圖		Kiddy	DATE 日期	2018-11-29	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日期	2018-11-29	