




- NOTES:
- 1. MATERIAL&FINISH:SEE TABLE A;.
 - 2. SPECIALITY:
 - 2.1 RATED CURRENT:1.8A For Pin1.5
0.5A For Pin 2.3.4
 - 2.2 RATED VOLTAGE:30V
 - 2.3 CONTACT RESISTANCE:30mΩ Max
 - 2.4 INSULATION RESISTANCE:1000MΩ Min 500V DC
 - 2.5 DIELECTRIC WITHSTANDING VOLTAGE:100V AC 1Min.
 - 2.6 SOLDER ABILITY:255±5℃, 5±0.5S.
 - 2.7 DURABILITY:5000 CYCLES Min.
 - 2.8 OPERATING CONDITION:TEMPERATURE-40℃~+85℃;
HUMIDITY 80% R.H Max
 - 3. MECHANICAL:
 - 3.1 INSERTION FORCE:35N Max
 - 3.2 EXTRACTION FORCE:8N Min
 - 4. PLEASE CONTACT JITS SALES REPRESENTATIVE TO
VERIFY PRODUCT DETAILS & AVAILABILITY

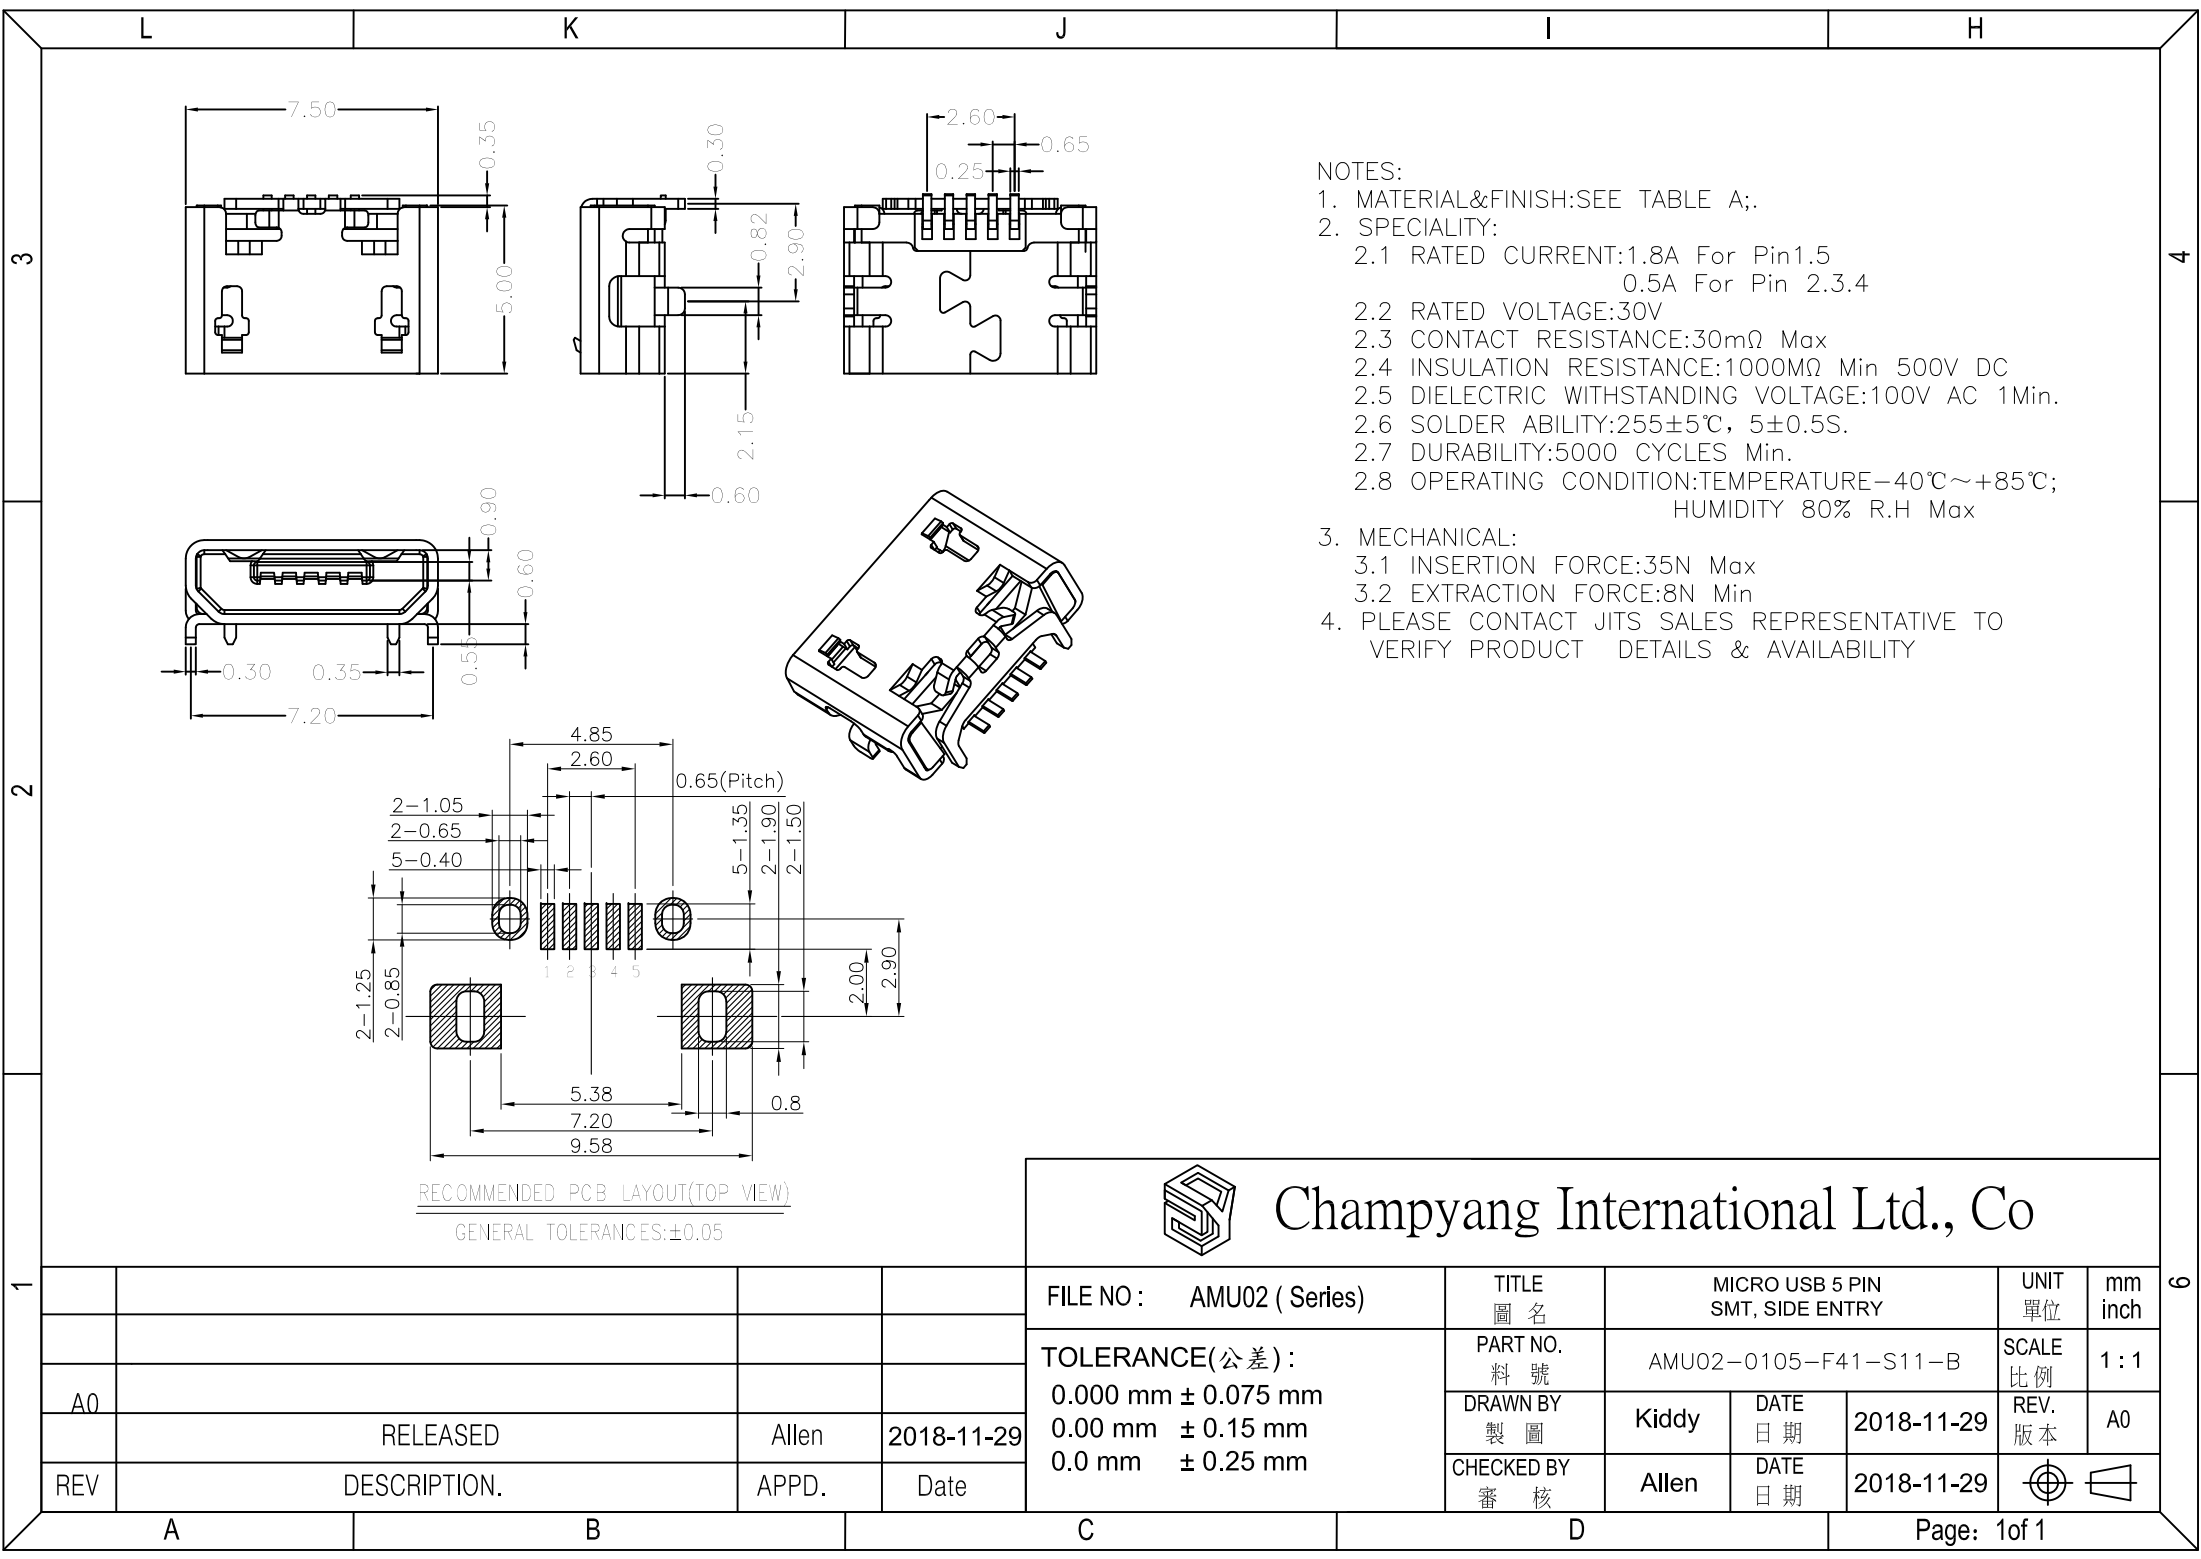

Champyang International Ltd., Co

A0			
	RELEASED	Allen	2018-11-29
REV	DESCRIPTION.	APPD.	Date

 Champyang International Ltd., Co							
FILE NO: AMU02 (Series)		TITLE 圖 名	MICRO USB 5 PIN SMT, SIDE ENTRY			UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料 號	AMU02-0105-F41-S11-B			SCALE 比例	1 : 1
		DRAWN BY 製 圖	Kiddy	DATE 日 期	2018-11-29	REV. 版本	A0
		CHECKED BY 審 核	Allen	DATE 日 期	2018-11-29	