


- NOTES:
- MATERIAL&FINISH:SEE TABLE A;
 - SPECIALITY:
 - RATED CURRENT:1.8A For Pin1.5
0.5A For Pin 2.3.4
 - RATED VOLTAGE:30V
 - CONTACT RESISTANCE:30mΩ Max
 - INSULATION RESISTANCE:1000MΩ Min 500V DC
 - DIELECTRIC WITHSTANDING VOLTAGE:100V AC 1Min.
 - SOLDER ABILITY:255±5℃, 5±0.5S.
 - DURABILITY:5000 CYCLES Min.
 - OPERATING CONDITION:TEMPERATURE-40℃~+85℃;
HUMIDITY 80% R.H Max
 - MECHANICAL:
 - INSERTION FORCE:35N Max
 - EXTRACTION FORCE:8N Min
 - PLEASE CONTACT JITS SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

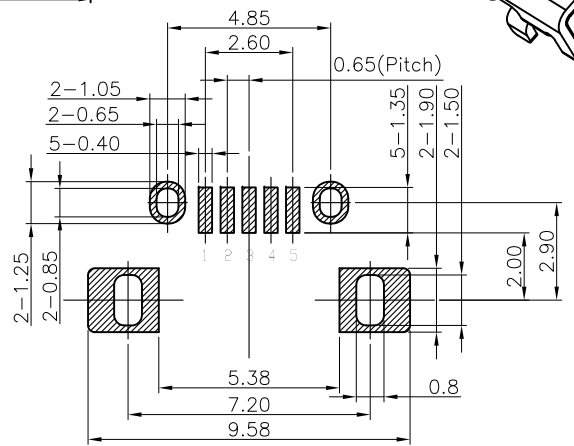

Champyang International Ltd., Co

REV	A0	RELEASED	Allen	2018-11-29
REV		DESCRIPTION.	APPD.	Date

FILE NO: AMU02 (Series)		TITLE 圖名		MICRO USB 5 PIN SMT, SIDE ENTRY		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料號		AMU02-0105-F41-S21-B		SCALE 比例	1:1
		DRAWN BY 製圖		Kiddy	DATE 日期	2018-11-29	REV. 版本
		CHECKED BY 審核		Allen	DATE 日期	2018-11-29	