

L K J I H






3

2


1

4

6

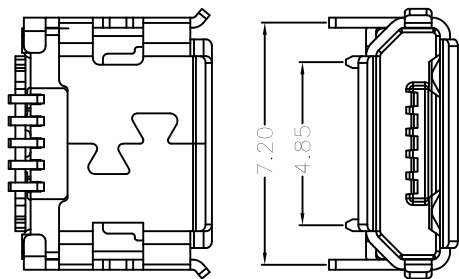

- NOTES:
- MATERIAL&FINISH:SEE TABLE A;
  - SPECIALITY:
    - RATED CURRENT:1.8A For Pin1.5  
0.5A For Pin 2.3.4
    - RATED VOLTAGE:30V
    - CONTACT RESISTANCE:30mΩ Max
    - INSULATION RESISTANCE:1000MΩ Min 500V DC
    - DIELECTRIC WITHSTANDING VOLTAGE:100V AC 1Min.
    - SOLDER ABILITY:255±5°C, 5±0.5S.
    - DURABILITY:5000 CYCLES Min.
    - OPERATING CONDITION:TEMPERATURE-40°C~+85°C;  
HUMIDITY 80% R.H Max
  - MECHANICAL:
    - INSERTION FORCE:35N Max
    - EXTRACTION FORCE:8N Min
  - PLEASE CONTACT JITS SALES REPRESENTATIVE TO VERIFY PRODUCT DETAILS & AVAILABILITY

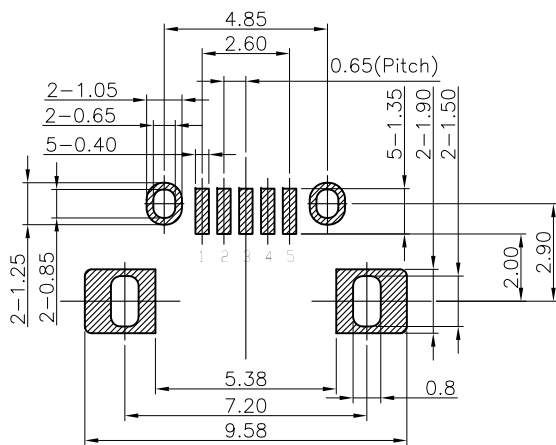

RECOMMENDED PCB LAYOUT(TOP VIEW)  
GENERAL TOLERANCES:±0.05

 Champyang International Ltd., Co

A0	RELEASED	Allen	2018-11-29
REV	DESCRIPTION.	APPD.	Date

FILE NO: AMU02 ( Series)		TITLE 圖名		MICRO USB 5 PIN SMT, SIDE ENTRY		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料號		AMU02-0105-F41-S22-B		SCALE 比例	1:1
DRAWN BY 製圖		Kiddy	DATE 日期	2018-11-29		REV. 版本	A0
CHECKED BY 審核		Allen	DATE 日期	2018-11-29			