

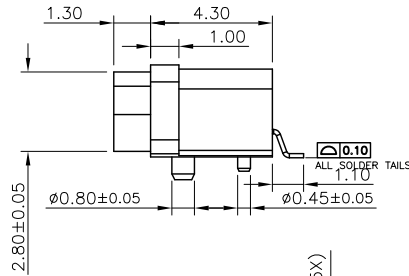
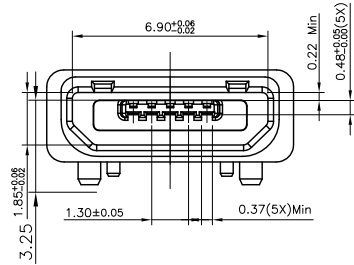
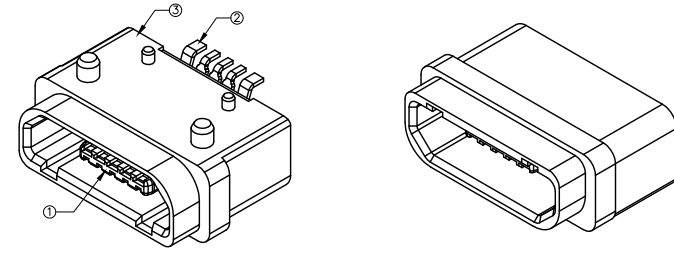




NO.	DESCRIPTION	MATERIAL	REMARK	COLOR
4	GLUE	EPOXY RESIN	UL 94V-0	————
3	SHELL	COPPER ALLOY	Ni PLATED	————
2	TERMINAL	COPPER ALLOY	Au PLATED	————
1	HOUSING	HIGH TEMP	UL 94V-0	BLACK

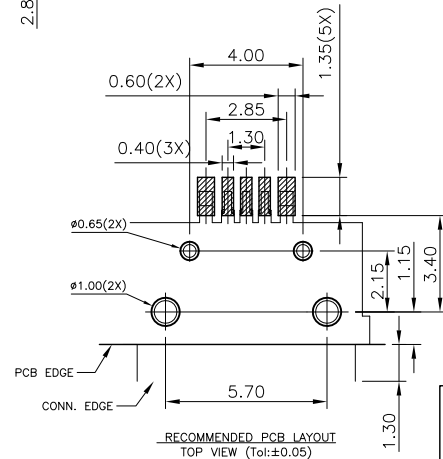

- NOTES:
- CONTACT CURRENT RATING: 1.0A(SIGNAL PIN2,3,4);2.0A(POWER PIN1,5).
  - CONTACT RESISTANCE: 30mΩ MAX.;
  - INSULATION RESISTANCE: 100MΩ MIN.;
  - DIELECTRIC WITHSTANDING: 100V AC MIN.;
  - DURABILITY: 5,000 CYCLES MIN.;
  - CONNECTOR MATING FORCES: 25N (2.55Kgf)MAX.;
  - CONNECTOR UNMATING FORCES: 2~25N (0.20~2.55Kgf);

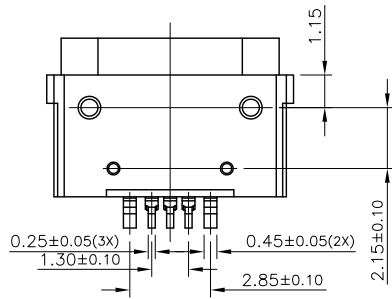

Champyang International Ltd., Co

FILE NO :	AMU03 ( Series)	TITLE	圖名	MICRO USB WATERPROOF	UNIT	mm
TOLERANCE(公差):	0.000 mm ± 0.075 mm	PART NO.	料號	AMU03-0105-xx1-S13-WP-D	SCALE	1:1
	0.00 mm ± 0.15 mm	DRAWN BY	製圖	Ben	DATE	2019-07-29
	0.0 mm ± 0.25 mm	CHECKED BY	審核	Allen	DATE	2019-07-29
A0	RELEASED	Allen	2019-07-29		REV.	A0
REV	DESCRIPTION.	APPD.	Date			

FILE NO :	AMU03 ( Series)	TITLE	圖名	MICRO USB WATERPROOF	UNIT	mm
TOLERANCE(公差):	0.000 mm ± 0.075 mm	PART NO.	料號	AMU03-0105-xx1-S13-WP-D	SCALE	1:1
	0.00 mm ± 0.15 mm	DRAWN BY	製圖	Ben	DATE	2019-07-29
	0.0 mm ± 0.25 mm	CHECKED BY	審核	Allen	DATE	2019-07-29
A0	RELEASED	Allen	2019-07-29		REV.	A0
REV	DESCRIPTION.	APPD.	Date			