

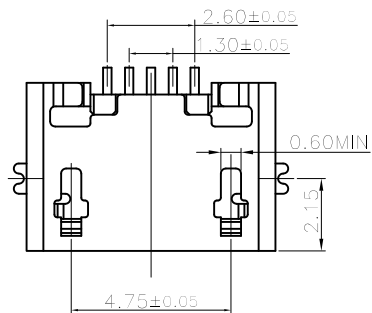
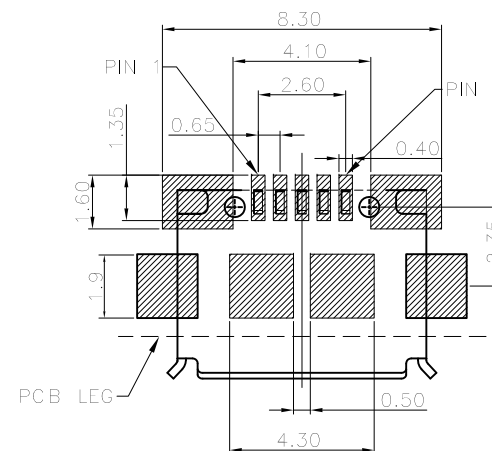


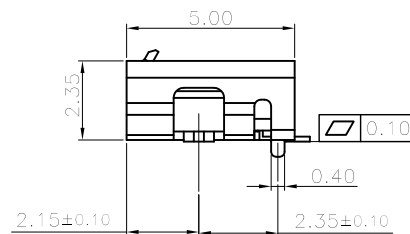


序號	DIM A	DIM B	料號	規格描述
2	/	/	AMU05-0105-F41-S11	MICRO USB 5PIN B/F CONNECTOR; 半金屬G/F; 端子+外殼SMT型, 平口; 無柱
1	/	/	AMU05-0105-F41-S11-A	MICRO USB 5PIN B/F CONNECTOR; 半金屬G/F; 端子+外殼SMT型, 平口; 有柱

- SPECIFICATIONS:
- MATERIAL:
HOUSING: LCP BLACK 30%GF; UL 94V-0
CONTACTS: COPPER ALLOY T=0.15mm
SHELL: SUS201; T=0.25mm
 - FINISH:
CONTACT: Au PLATED ALL OVER NICKEL
SHELL: MATTE Sn PLATED OVER NICKEL
 - ELECTRICAL
CONTACT RESISTANCE: 30mΩ Max
INSULATION RESISTANCE: 1000MΩ Min
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC
CURRENT RATING: 1.0A PER CONTACT MIN.
VOLTAGE RATING: 30V AC/DC(RMS)
 - MECHANICAL:
DURABILITY: 5000 CYCLES Min.
INSERTION FORCE: 3.5kgf Max
EXTRACTION FORCE: 1.0kgf Min
 - ENVIRONMENTAL
STORAGE TEMPERATURE: -20°C ~ 85°C

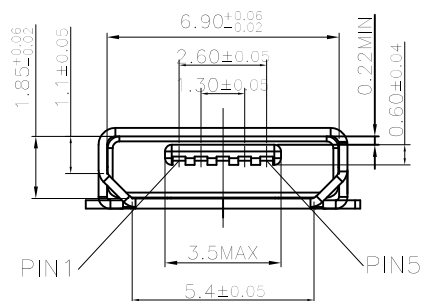

RECOMMENDED P.C.B. LAYOUT
TOP VIEW (TOLERANCE: ±0.05)

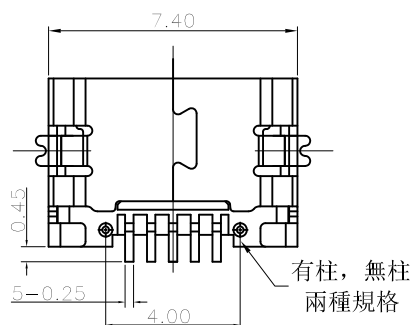

Champyang International Ltd., Co

A0			
REV	RELEASED	Allen	2019-08-08
	DESCRIPTION.	APPD.	Date

FILE NO: AMU05 (Series)		TITLE 圖 名		MICRO USB 5 PIN SMT SHIELD, SIDE ENTRY		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.15 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		PART NO. 料 號		AMU05-0105-F41-S11		SCALE 比例	1:1
		DRAWN BY 製 圖		Ben	DATE 日期	2019-08-07	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日期	2019-08-07	