
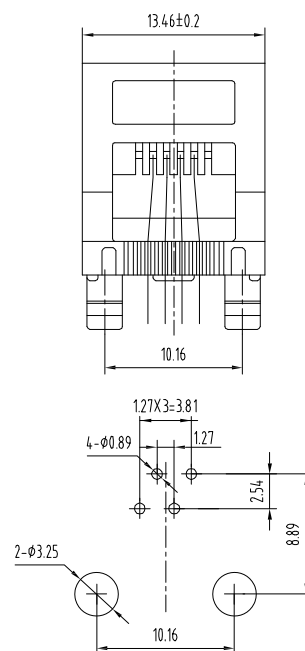




PC Board Layout
Component Side Shown

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

1. HOUSING/INSERT MATERIAL :
THERMOPLASTIC, PBT UL94V-0, COLOR BLACK
2. CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.46\text{mm}$
3. PLATING: GOLD PLATING OVER NICKEL, PLATED
NICKEL 30-50U". SN 100-120U. GOLD PLATED
ON CONTACT AREA FU"
4. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40°C TO $+85^{\circ}\text{C}$
2. OPERATION: 0°C TO 75°C



Champyang International Ltd., Co

				FILE NO : ARJ01(Series)	TITLE 圖 名	RJ11 6P4C TOP ENTRY			UNIT 單位	mm inch
				TOLERANCE(公差): 0.000 mm $\pm$ 0.075 mm 0.00 mm $\pm$ 0.15 mm 0.0 mm $\pm$ 0.25 mm	PART NO. 料 號	ARJ01-010604-X21			SCALE 比例	1 : 1
A0					DRAWN BY 製 圖	Kiddy	DATE 日 期	2018-10-30	REV. 版 本	A0
	RELEASED	Allen	2018-10-30		CHECKED BY 審 核	Allen	DATE 日 期	2018-10-30		
REV	DESCRIPTION.	APPD.	Date							