
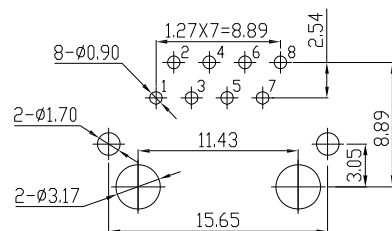

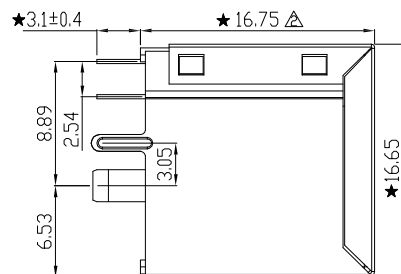


MECHANICAL:



PC Board Layout

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

1. HOUSING/INSERT MATERIAL:
THERMOPLASTIC, PBT UL94V-0,COLOR BLACK
2. CONTACT MATERIAL:PHOSPHOR BRONZE T=0.35
3. PLATING:GOLD PLATING OVER NICKEL, PLATED
NICKEL 30-50U". SN 100-120U. GOLD PLATED
ON CONTACT AREA FU/3U/6U/15U/30U"
4. OPERATING LIFE:750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE:-40° C TO +85° C
2. OPERATION: 0° C TO 75° C



Champyang International Ltd., Co

A0			
REV	RELEASED	Allen	2019-06-11
	DESCRIPTION.	APPD.	Date

FILE NO : ARJ01(Series)		TITLE 圖 名		RJ45 8P8C TOP ENTRY WITH SHIELDED		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料 號		ARJ01-010808-F21-S0		SCALE 比例	1:1
		DRAWN BY 製 圖		Ben	DATE 日期	2019-06-10	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日期	2019-06-11	