
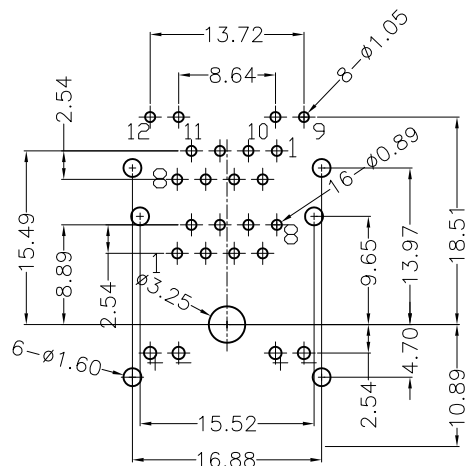
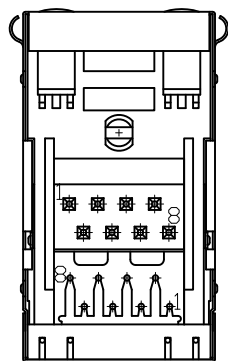
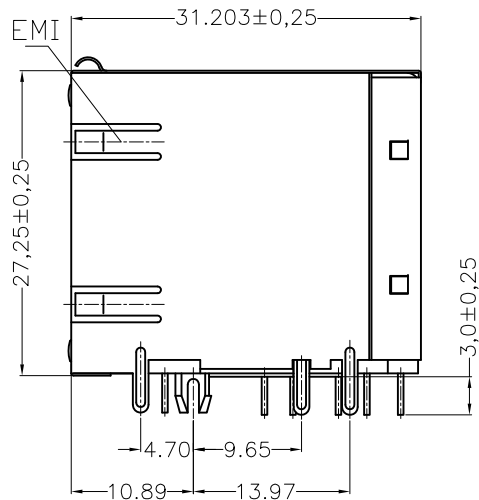


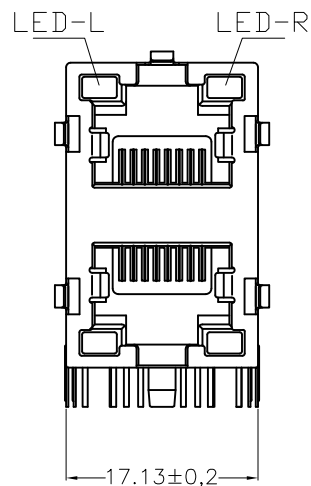

PC Board Layout
Component Side Shown

SPECIFICATION NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 30mΩ MAX.
- INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
- DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE


MECHANICAL:

- HOUSING/INSERT MATERIAL:
THERMOPLASTIC, PBT UL94V-0,COLOR BLACK
- CONTACT MATERIAL:PHOSPHOR BRONZE Ø0.46mm
- PLATING:GOLD PLATING OVER NICKEL, PLATED NICKEL 30-50U". SN 100-120U. GOLD PLATED ON CONTENT AREA FU/3U/6U/15U/30U"
- OPERATING LIFE:750 CYCLES MIN.

ENVIRONMENTAL:

- STORAGE:-40° C TO +85° C
- OPERATION: 0° C TO 75° C

LED ELECTRICAL CHARACTERISTIC



Standard LED	Wavelength	Forward V (Min/Max)	Forward A	Type
Green	568nm	1.8V/2.8V	20mA	squareness
Yellow	585nm	1.8V/2.8V	20mA	squareness



Champyang International Ltd., Co

A0			
REV	RELEASED	Allen	2019-03-07
	DESCRIPTION.	APPD.	Date

FILE NO : ARJ12 (Series)		TITLE 圖 名		RJ45,Shielded,Receptacle, Horizontal,2x1 Port,Tht		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料 號		ARJ02-020808-X21-S3L1-R		SCALE 比例	1 : 1
		DRAWN BY 製 圖		Kiddy	DATE 日期	2019-03-06	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日期	2019-03-06	