

SPECIFICATION:

Electrical:




Current Rating:1.5Amp max @25°C
 Voltage Rating:150VAC max
 Insulation Resistance:500 megohms min
 Contact Resistance:30 milliohms max
 Withstanding Voltage:1000 VAC

Mechanical:

Durability:1000 Cycles
 Operating Temperature:-40°C~+70°C
 Storage Temperature:-50°C~+75°C
 Contact Normal Force:100g Minimum

Material:

Housing:Thermoplastic UL94V-0,PBT
 Contact:0.35*0.45mm Phosphor Bronze
 6u" Gold Plating Over Nickel In Contact,
 Tin Plating Over Nickel In Solder Area.
 Soldering Temperature: 260+/-5°C,5sec/95%Area be covered
 Withstand Temperature: 230+/-5°C,5sec No stick tin melting phenomenon

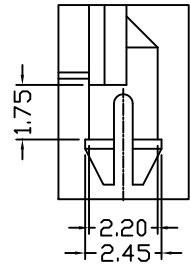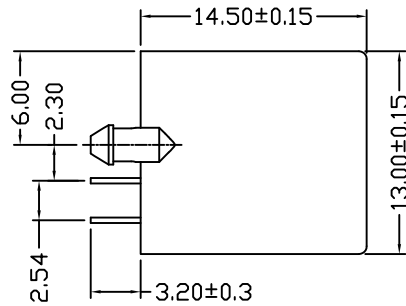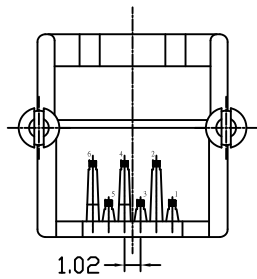

DETAIL A 2:1



Champyang International Ltd., Co

REV	DESCRIPTION.	APPD.	Date
A0	RELEASED	Allen	2018-11-02

FILE NO : ARJ03(Series)		TITLE 圖名		RJ45 8P8C SIDE ENTRY		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料號		ARJ03-010606-321		SCALE 比例	1:1
		DRAWN BY 製圖	Kiddy	DATE 日期	2019-06-20	REV. 版本	A0
		CHECKED BY 審核	Allen	DATE 日期	2019-06-20		