


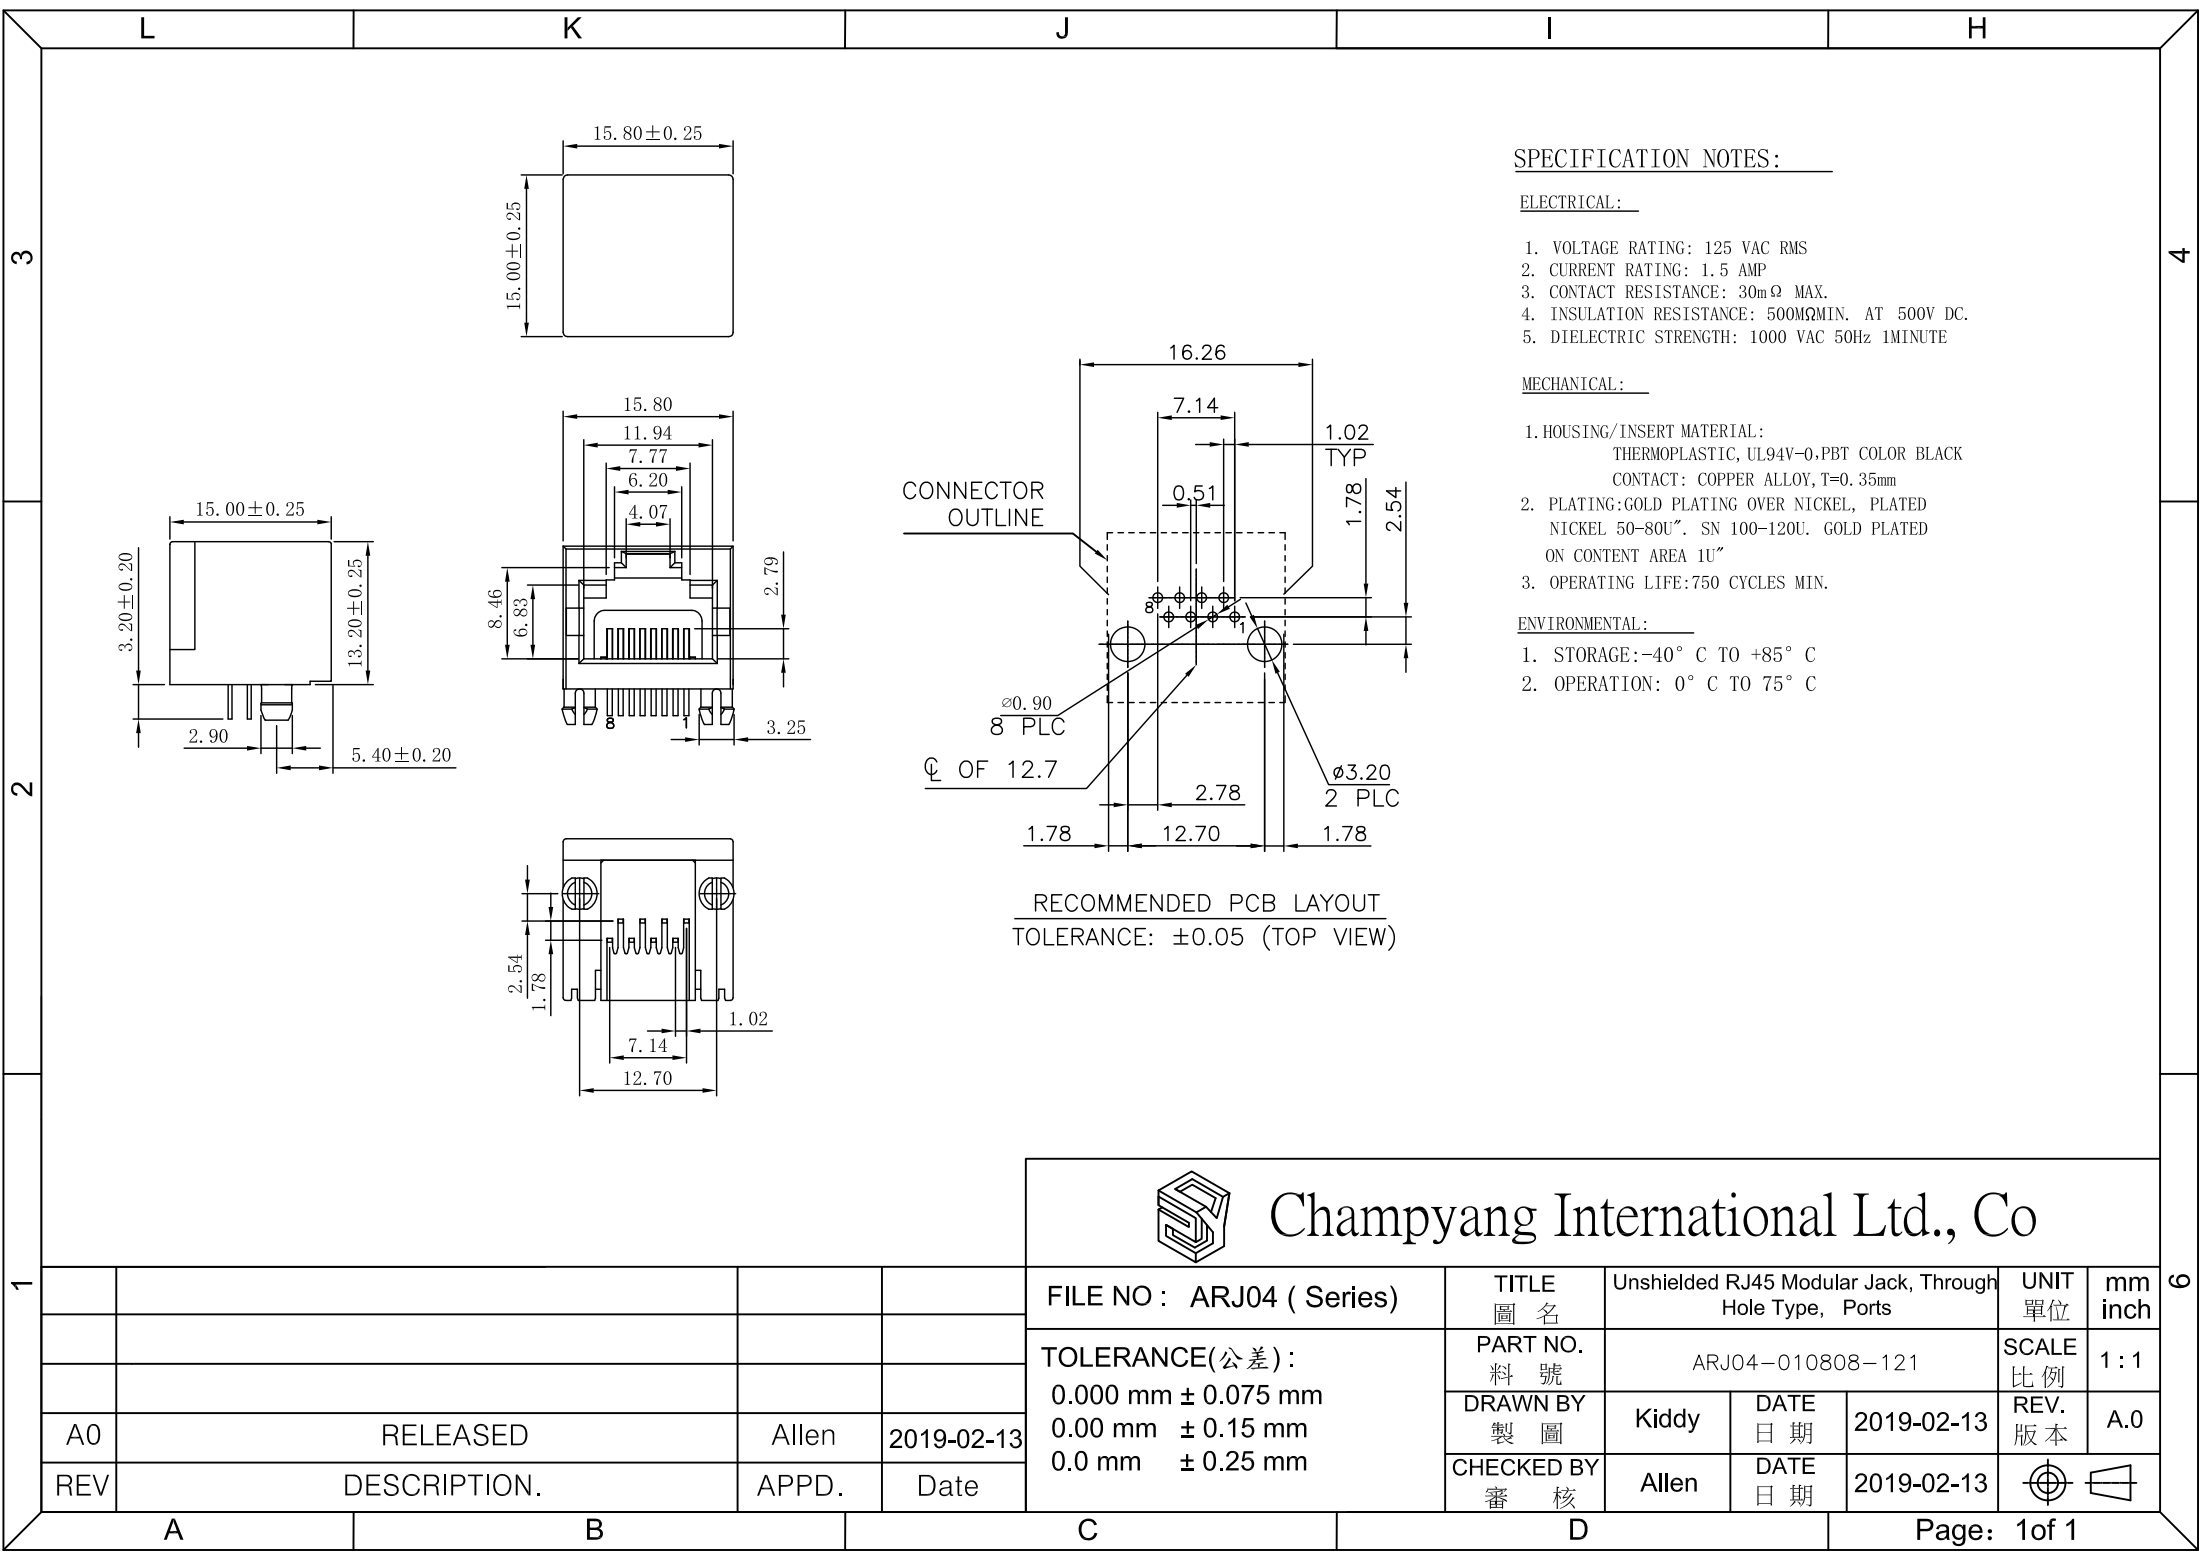

SPECIFICATION NOTES:

ELECTRICAL:

- 1. VOLTAGE RATING: 125 VAC RMS
- 2. CURRENT RATING: 1.5 AMP
- 3. CONTACT RESISTANCE: 30mΩ MAX.
- 4. INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
- 5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

- 1. HOUSING/INSERT MATERIAL:
THERMOPLASTIC, UL94V-0,PBT COLOR BLACK
- CONTACT: COPPER ALLOY, T=0.35mm
- 2. PLATING:GOLD PLATING OVER NICKEL, PLATED
NICKEL 50-80U". SN 100-120U. GOLD PLATED
ON CONTENT AREA 1U"
- 3. OPERATING LIFE:750 CYCLES MIN.

ENVIRONMENTAL:

- 1. STORAGE:-40° C TO +85° C
- 2. OPERATION: 0° C TO 75° C

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05 (TOP VIEW)



Champyang International Ltd., Co

				FILE NO : ARJ04 (Series)	TITLE 圖 名	Unshielded RJ45 Modular Jack, Through Hole Type, Ports			UNIT 單位	mm inch
				TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO. 料 號	ARJ04-010808-121			SCALE 比例	1 : 1
A0	RELEASED	Allen	2019-02-13		DRAWN BY 製 圖	Kiddy	DATE 日 期	2019-02-13	REV. 版本	A.0
REV	DESCRIPTION.	APPD.	Date		CHECKED BY 審 核	Allen	DATE 日 期	2019-02-13		