


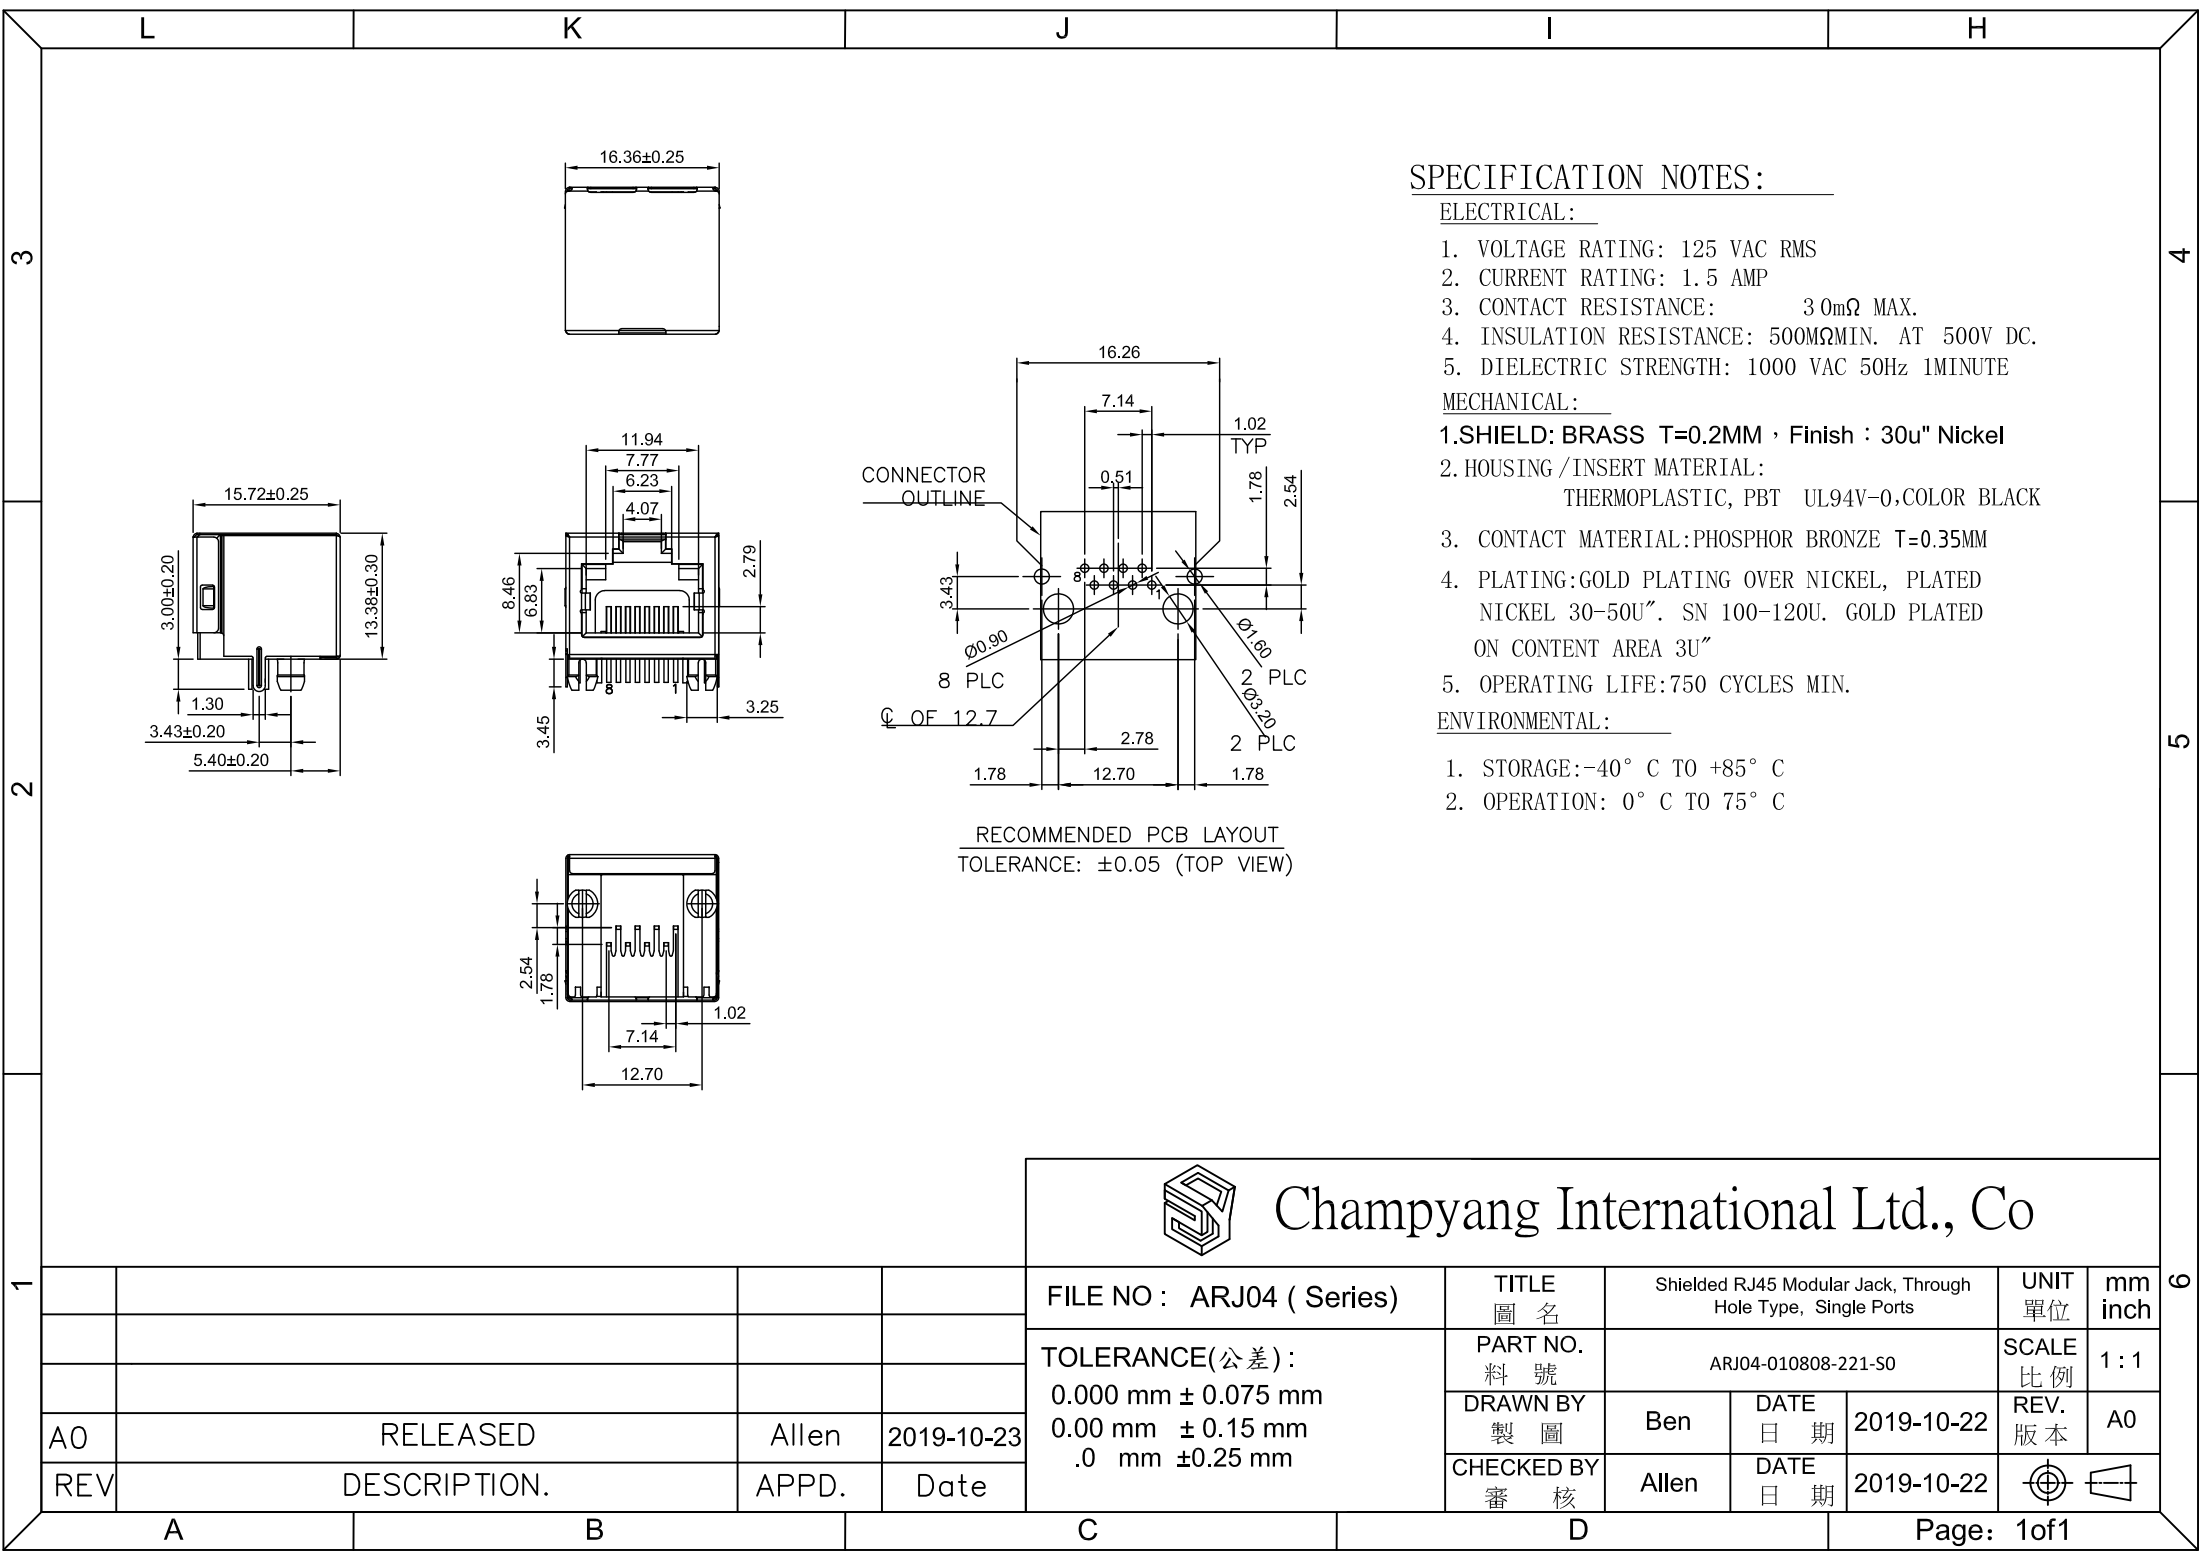

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

- 1.SHIELD: BRASS T=0.2MM · Finish : 30u" Nickel
2. HOUSING /INSERT MATERIAL:
THERMOPLASTIC, PBT UL94V-0,COLOR BLACK
3. CONTACT MATERIAL:PHOSPHOR BRONZE T=0.35MM
4. PLATING:GOLD PLATING OVER NICKEL, PLATED NICKEL 30-50U". SN 100-120U. GOLD PLATED ON CONTACT AREA 3U"
5. OPERATING LIFE:750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE:-40° C TO +85° C
2. OPERATION: 0° C TO 75° C



Champyang International Ltd., Co

AO	RELEASED	Allen	2019-10-23
REV	DESCRIPTION.	APPD.	Date

FILE NO : ARJ04 (Series)

TOLERANCE(公差):
0.000 mm ± 0.075 mm
0.00 mm ± 0.15 mm
.0 mm ±0.25 mm

TITLE
圖 名

Shielded RJ45 Modular Jack, Through
Hole Type, Single Ports

UNIT
單位
mm
inch

PART NO.
料 號

ARJ04-010808-221-S0

SCALE
比例
1 : 1

DRAWN BY
製 圖

Ben

DATE
日 期

2019-10-22

REV.
版本
A0

CHECKED BY
審 核

Allen

DATE
日 期

2019-10-22

