
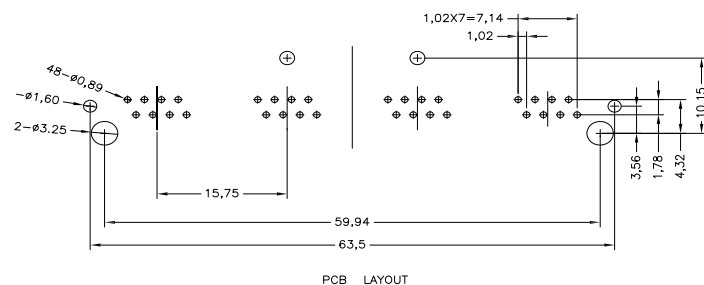
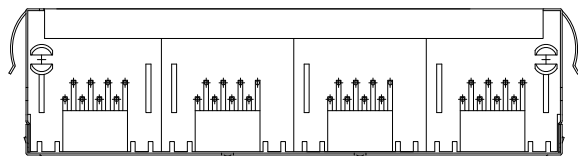



MECHANICAL:

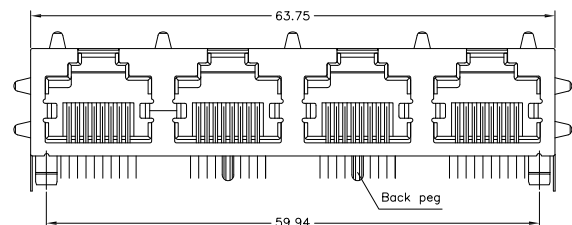

SPECIFICATION NOTES:

ELECTRICAL:

- VOLTAGE RATING: 125 VAC RMS
- CURRENT RATING: 1.5 AMP
- CONTACT RESISTANCE: 30mΩ MAX.
- INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
- DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

- HOUSING/INSERT MATERIAL:
THERMOPLASTIC, PBT UL94V-0,COLOR BLACK
- CONTACT MATERIAL:PHOSPHOR BRONZE Ø0.46
- PLATING:GOLD PLATING OVER NICKEL, PLATED NICKEL 30-50U". SN 100-120U. GOLD PLATED ON CONTENT AREA FU/3U/6U/15U/30U"
- OPERATING LIFE:750 CYCLES MIN.

ENVIRONMENTAL:

- STORAGE:-40° C TO +85° C
- OPERATION: 0° C TO 75° C



Champyang International Ltd., Co

				FILE NO : ARJ04 (Series)	TITLE 圖 名	Shielded RJ45 Modular Jack, Through Hole Type, 1X4 Ports			UNIT 單位	mm inch
				TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO. 料 號	ARJ04-040808-121-S3			SCALE 比例	1:1
A0	RELEASED	Allen	2019-05-09		DRAWN BY 製 圖	Kiddy	DATE 日 期	2019-05-09	REV. 版本	A.0
REV	DESCRIPTION.	APPD.	Date		CHECKED BY 審 核	Allen	DATE 日 期	2019-05-09		
A		B		C		D			Page: 1 of 1	