
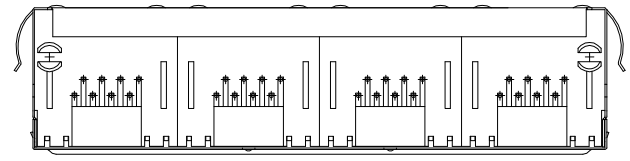



MECHANICAL :

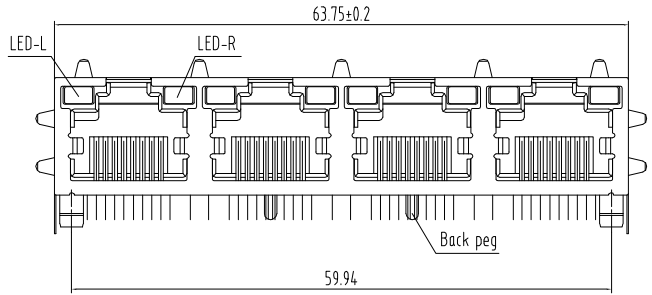

SPECIFICATION NOTES :

ELECTRICAL :


1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 500MΩMIN. AT
5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL :

1. HOUSING/INSERT MATERIAL:
THERMOPLASTIC, PBT UL94V-0,COLOR BLACK
2. CONTACT MATERIAL:PHOSPHOR BRONZE ϕ 0.46
3. PLATING:GOLD PLATING OVER NICKEL, PLATED NICKEL 30-50U". SN 100-120U. GOLD PLATED ON CONTENT AREA FU/3U/6U/15U/30U"
4. OPERATING LIFE:750 CYCLES MIN.

ENVIRONMENTAL :

1. STORAGE:-40° C TO +85° C
2. OPERATION: 0° C TO 75° C

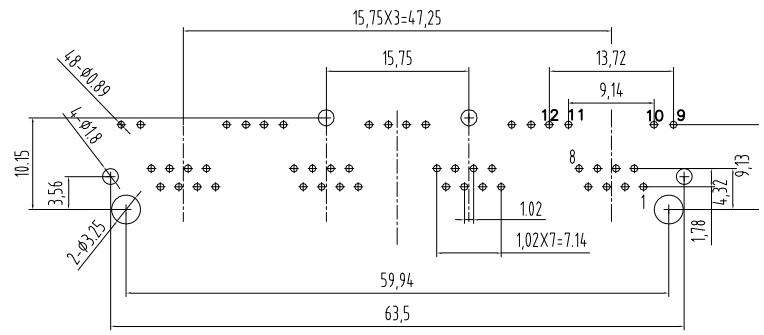

PC Board Layout
Component Side Showr

LED ELECTRICAL CHARACTERISTIC				
	YELLOW 12-11	GREEN 10-9		
	LEFT LED	RIGHT LED		
Standard LED	Wavelength	Forward V (Min/Max)	Forward A	Type
Green	568nm	1.8V/2.8V	20mA	squareness
Yellow	585nm	1.8V/2.8V	20mA	squareness



Champyang International Ltd., Co

AO	RELEASED	Allen	2019-12-18
REV	DESCRIPTION.	APPD.	Date

FILE NO : ARJ04 (Series)	TITLE 圖名	RJ45,Shielded,Receptacle, Horizontal,1X4 Port,With LED		UNIT 單位	mm inch	
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO. 料號	ARJ04-040808-F21-S3L1-A		SCALE 比例	1:1	
	DRAWN BY 製圖	Ben	DATE 日期	2019-12-18	REV. 版本	A.0
	CHECKED BY 審核	Allen	DATE 日期	2019-12-18		