






W/LED RECOMMENDED PCB LAYOUT  
COMPONENT SIDE(t=1.6mm, tol:±0.05)

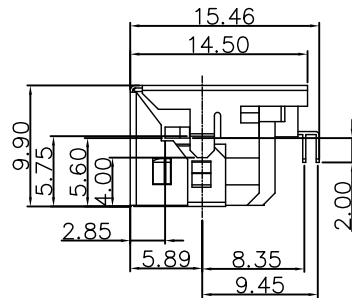

Electrical Characteristics :  
Insulation Resistance : 500MΩ Min.  
Contact Resistance : 50mΩ Max.  
Withstand Voltage : 1000 VAC 1 minute.  
Current Rating : 1.5A

Material:  
Housing: Thermoplastic UL 94V-0  
Contact : Selective Gold Plating  
Terminal: 0.25mm Thickness Copper Alloy  
Plated With Gold And Tin In Solder Area.  
Shell: Alloy ,Nickel Plating  
Fork:Alloy



Champyang International Ltd., Co

REV	RELEASED	Allen	2018-08-02
	DESCRIPTION.	APPD.	Date

FILE NO : ARJ05 ( Series)		TITLE 圖名		Shielded RJ45 Modular Jack, Through Hole Type, Offset H9.90 SinkH4.3		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料號		ARJ05-010808-XX1-S0		SCALE 比例	1:1
		DRAWN BY 製圖		Kiddy	DATE 日期	2018-08-02	REV. 版本
		CHECKED BY 審核		Allen	DATE 日期	2018-08-02	A.0