

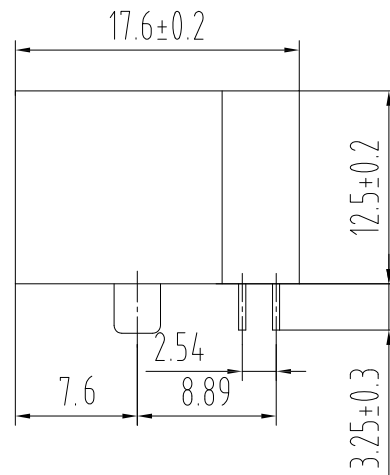
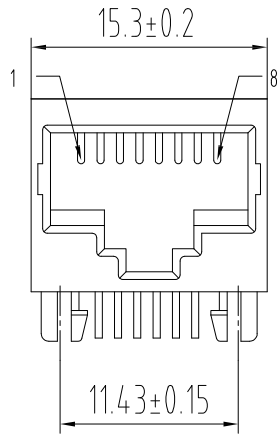


MECHANICAL:

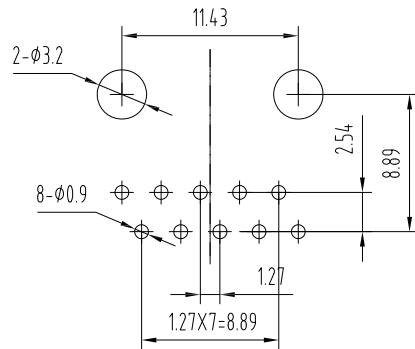

PCB LAYOUT



PC Board Layout

Component Side Shown

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

1. HOUSING/INSERT MATERIAL:
THERMOPLASTIC, PBT UL94V-0, COLOR BLACK
2. CONTACT MATERIAL: PHOSPHOR BRONZE $\phi 0.46$
3. PLATING: GOLD PLATING OVER NICKEL, PLATED NICKEL 30-50U". SN 100-120U. GOLD PLATED ON CONTACT AREA FU/3U/6U/15U/30U"
4. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40° C TO +85° C
2. OPERATION: 0° C TO 75° C



Champyang International Ltd., Co

REV	DESCRIPTION.	APPD.	Date
A0	RELEASED	Allen	2019-04-23

FILE NO : ARJ09(Series)		TITLE 圖名		RJ45 10P10C SIDE ENTRY TAB DOWN, ROUND PIN		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料號		ARJ09-011010-F21-B-A		SCALE 比例	1:1
		DRAWN BY 製圖		Ben	DATE 日期	2019-04-22	REV. 版本
		CHECKED BY 審核		Allen	DATE 日期	2019-04-23	