


MECHANICAL :

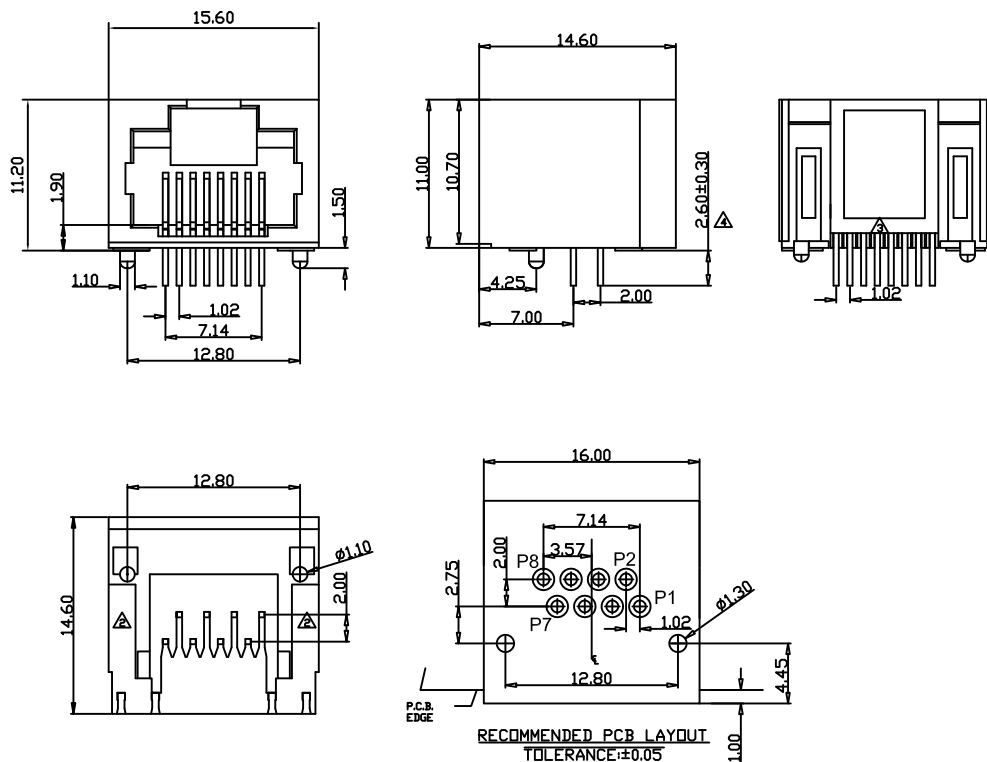

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 30mΩ MAX.
4. INSULATION RESISTANCE: 500MΩMIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

1. HOUSING/INSERT MATERIAL:  
THERMOPLASTIC, LCP UL94V-0, COLOR BLACK
2. CONTACT MATERIAL: PHOSPHOR BRONZE  $\phi 0.46\text{mm}$
3. PLATING: GOLD PLATING OVER NICKEL, PLATED NICKEL 30-50U". GOLD PLATED ON CONTENT AREA FU
4. OPERATING LIFE: 750 CYCLES MIN.

ENVIRONMENTAL:

1. STORAGE: -40° C TO +85° C
2. OPERATION: 0° C TO 75° C



Champyang International Ltd., Co

AO	RELEASED	Allen	2020-06-23
REV	DESCRIPTION.	APPD.	Date

FILE NO : ARJ19 ( Series)		TITLE 圖名		Unshielded RJ45 Modular Jack, Through Hole Type, 1X1 Ports		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		PART NO. 料號		ARJ19-010808-F41		SCALE 比例	1:1
		DRAWN BY 製圖		Ben	DATE 日期	2020-06-23	REV. 版本
		CHECKED BY 審核		Allen	DATE 日期	2020-06-23	A.0