
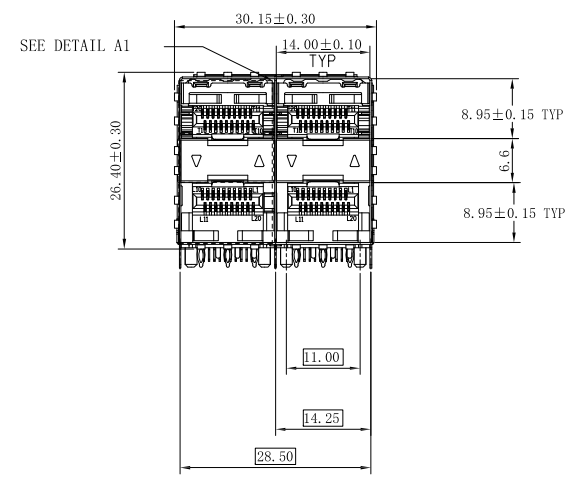
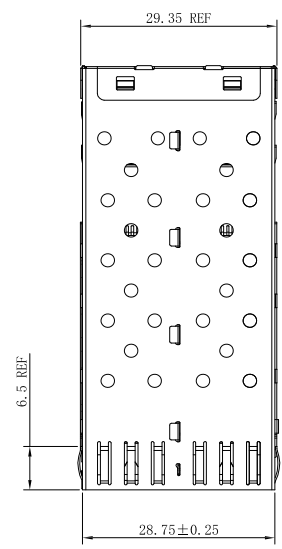
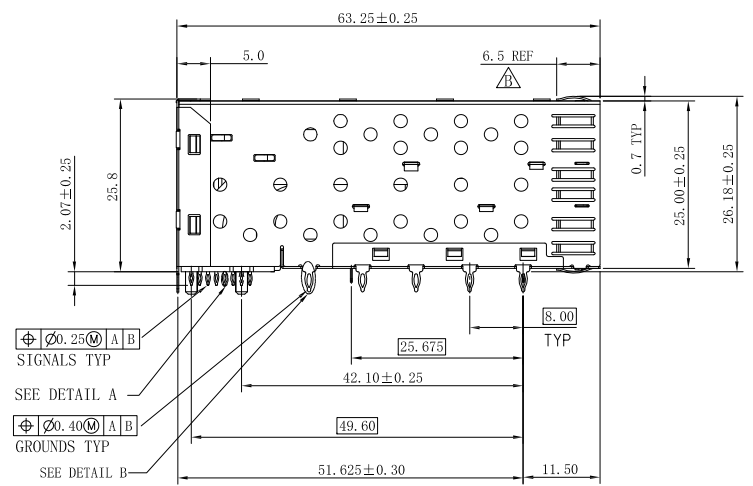







NOTE:
MATERIAL:
1. CONTACT: PHOSPHOR BRONZE.
2. CONNECTOR HOUSING: LCP UL 94V-0. COLOR: BLACK.
3. MOULDED INSERT: HIGH TEMPERATURE PLASTIC UL 94V-0. COLOR:BLACK.
4. CAGE: COPPER ALLOY.
5. LIGHT PIPES: POLYCARBONATE. UL 94V-0. COLOR:CLEAR
6. LIGHT PIPE HOUSING: PBT UL 94V-0 COLOR:BLACK.
PLATED:
1. CONTACT MATING AREA : PLATING GOLD OVER 1.27 MICROMETERS MINIMUM NICKEL.
2. CONTACT NEEDLE EYE: 2.54 MICROMETERS MINIMUM MATTE TIN OVER 1.27 MICROMETERS MINIMUM NICKEL.
MECHANICAL REQUIREMENT:
1. DURABILITY: 100 CYCLES MIN.
2. INSERTION AND EXTRACTION FORCE: 40N MAX & 11.5N MAX
ENVIRONMENTAL:
1. LOW LEVEL CONTACT RESITANCE(LLCR):
ΔR 10 MILLIOHMS MAXIMUM FOR SHIELD AND SIGNAL CONTACTS.
2. DIELECTRIC WITHSTANDING VOLTAGE: 300V AC/MAX.
3. INSULATION RESISTANCE: 1x10⁹ OHMS MINIMUM.
4. RATINGS CURRENT: 0.5 AMPS MAX.
5. RATINGS VOLTAGE: 30 VOLTS DC/AC(RMS) MAX.
6. OPERATION: -40°C~+85°C.
7. STORAGE: -55°C~+105°C.
8. ROHS COMPLIANT

 Champanyang International Ltd., Co

A0	RELEASED	Allen	2026-05-21
REV	DESCRIPTION.	APPD.	Date

FILE NO：ASP01(Series)	TITLE 圖 名	SFP 2x2 CAGE PRESS FIT 帶導光棒			UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm	PART NO. 料 號	ASP01-6322101YL-2A-H			SCALE 比例	1：1
	DRAWN BY 製 圖	Ray	DATE 日期	2026-05-21	REV. 版本	A0
	CHECKED BY 審 核	Allen	DATE 日期	2026-05-21		

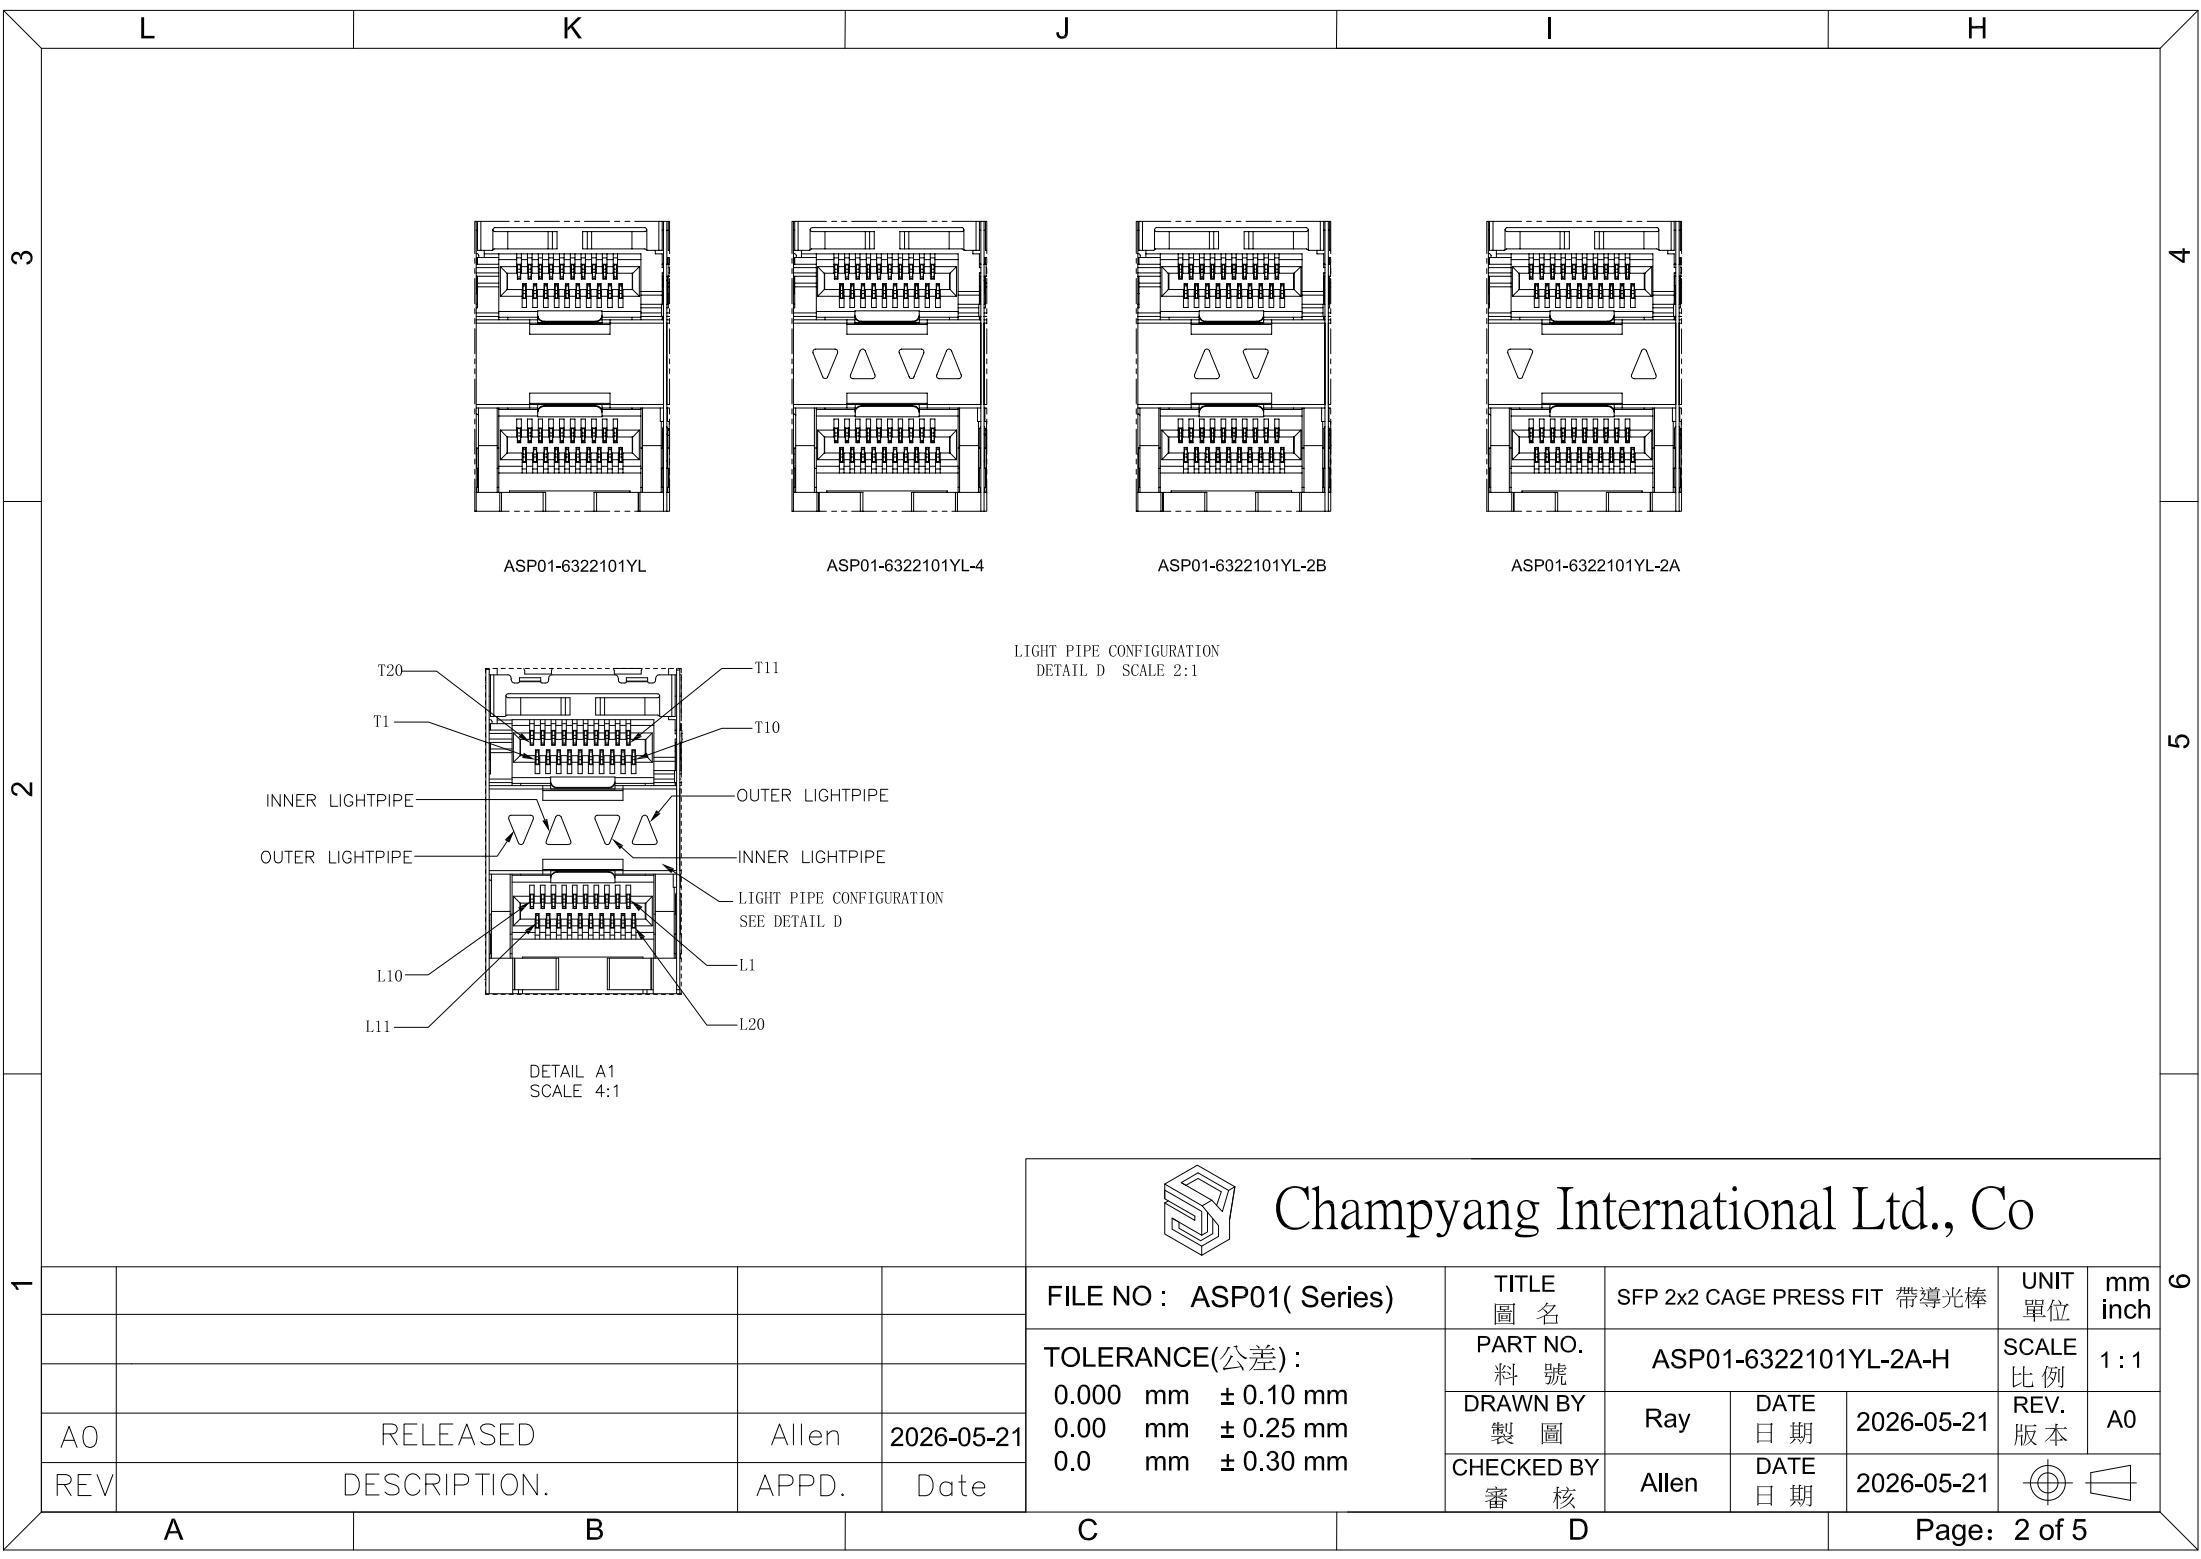


ASP01-6322101YL

ASP01-6322101YL-4

ASP01-6322101YL-2B

ASP01-6322101YL-2A

LIGHT PIPE CONFIGURATION
DETAIL D SCALE 2:1

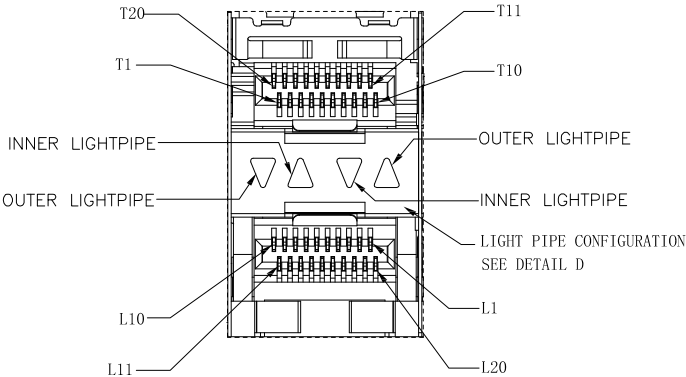


DETAIL A1
SCALE 4:1





Champyang International Ltd., Co

A0	RELEASED	Allen	2026-05-21
REV	DESCRIPTION.	APPD.	Date


FILE NO : ASP01(Series)		TITLE 圖 名		SFP 2x2 CAGE PRESS FIT 帶導光棒		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		PART NO. 料 號		ASP01-6322101YL-2A-H		SCALE 比例	1 : 1
		DRAWN BY 製 圖		Ray	DATE 日 期	2026-05-21	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日 期	2026-05-21	

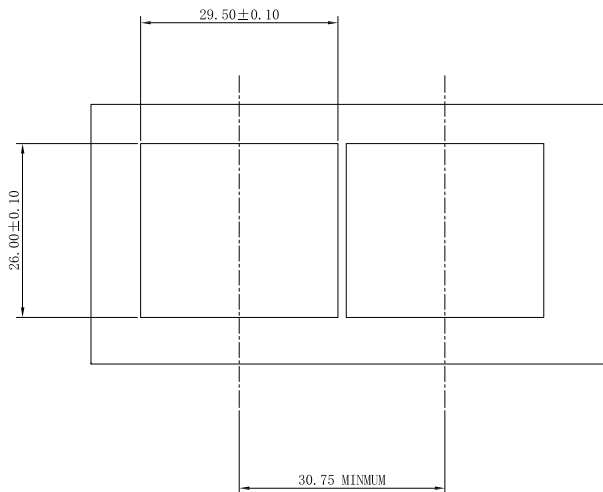

BEZEL CUT-OUT CENTER SPACING DETAIL
BZZEL THICKNESS:0.8~2.6

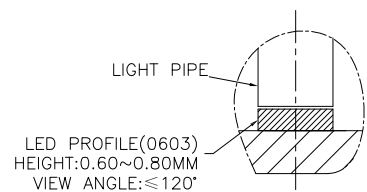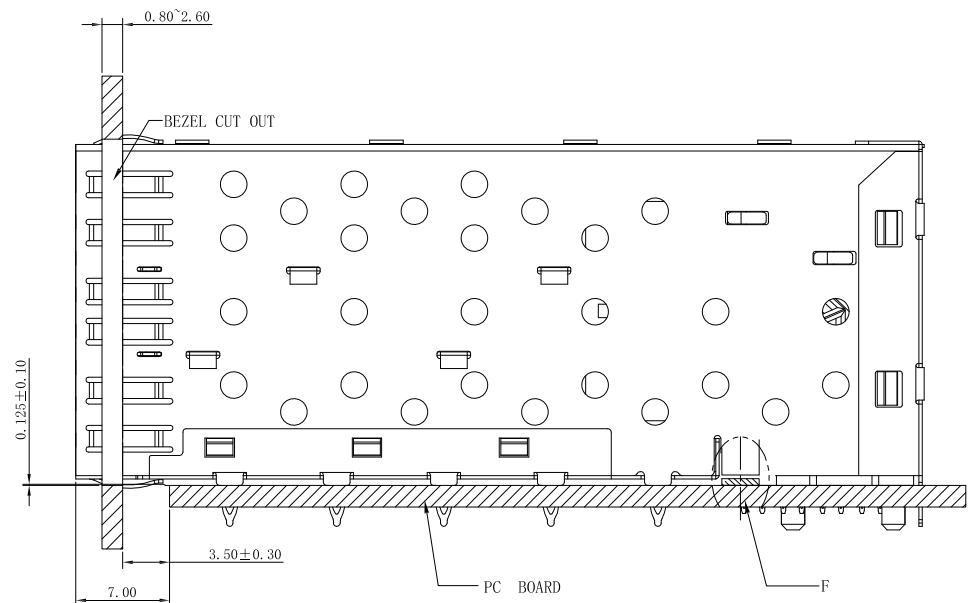


DETAIL F
SCALE 4:1




Champyang International Ltd., Co

A0	RELEASED	Allen	2026-05-21
REV	DESCRIPTION.	APPD.	Date

FILE NO : ASP01(Series)		TITLE 圖 名		SFP 2x2 CAGE PRESS FIT 帶導光棒		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		PART NO. 料 號		ASP01-6322101YL-2A-H		SCALE 比例	1:1
		DRAWN BY 製 圖		Ray	DATE 日期	2026-05-21	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日期	2026-05-21	

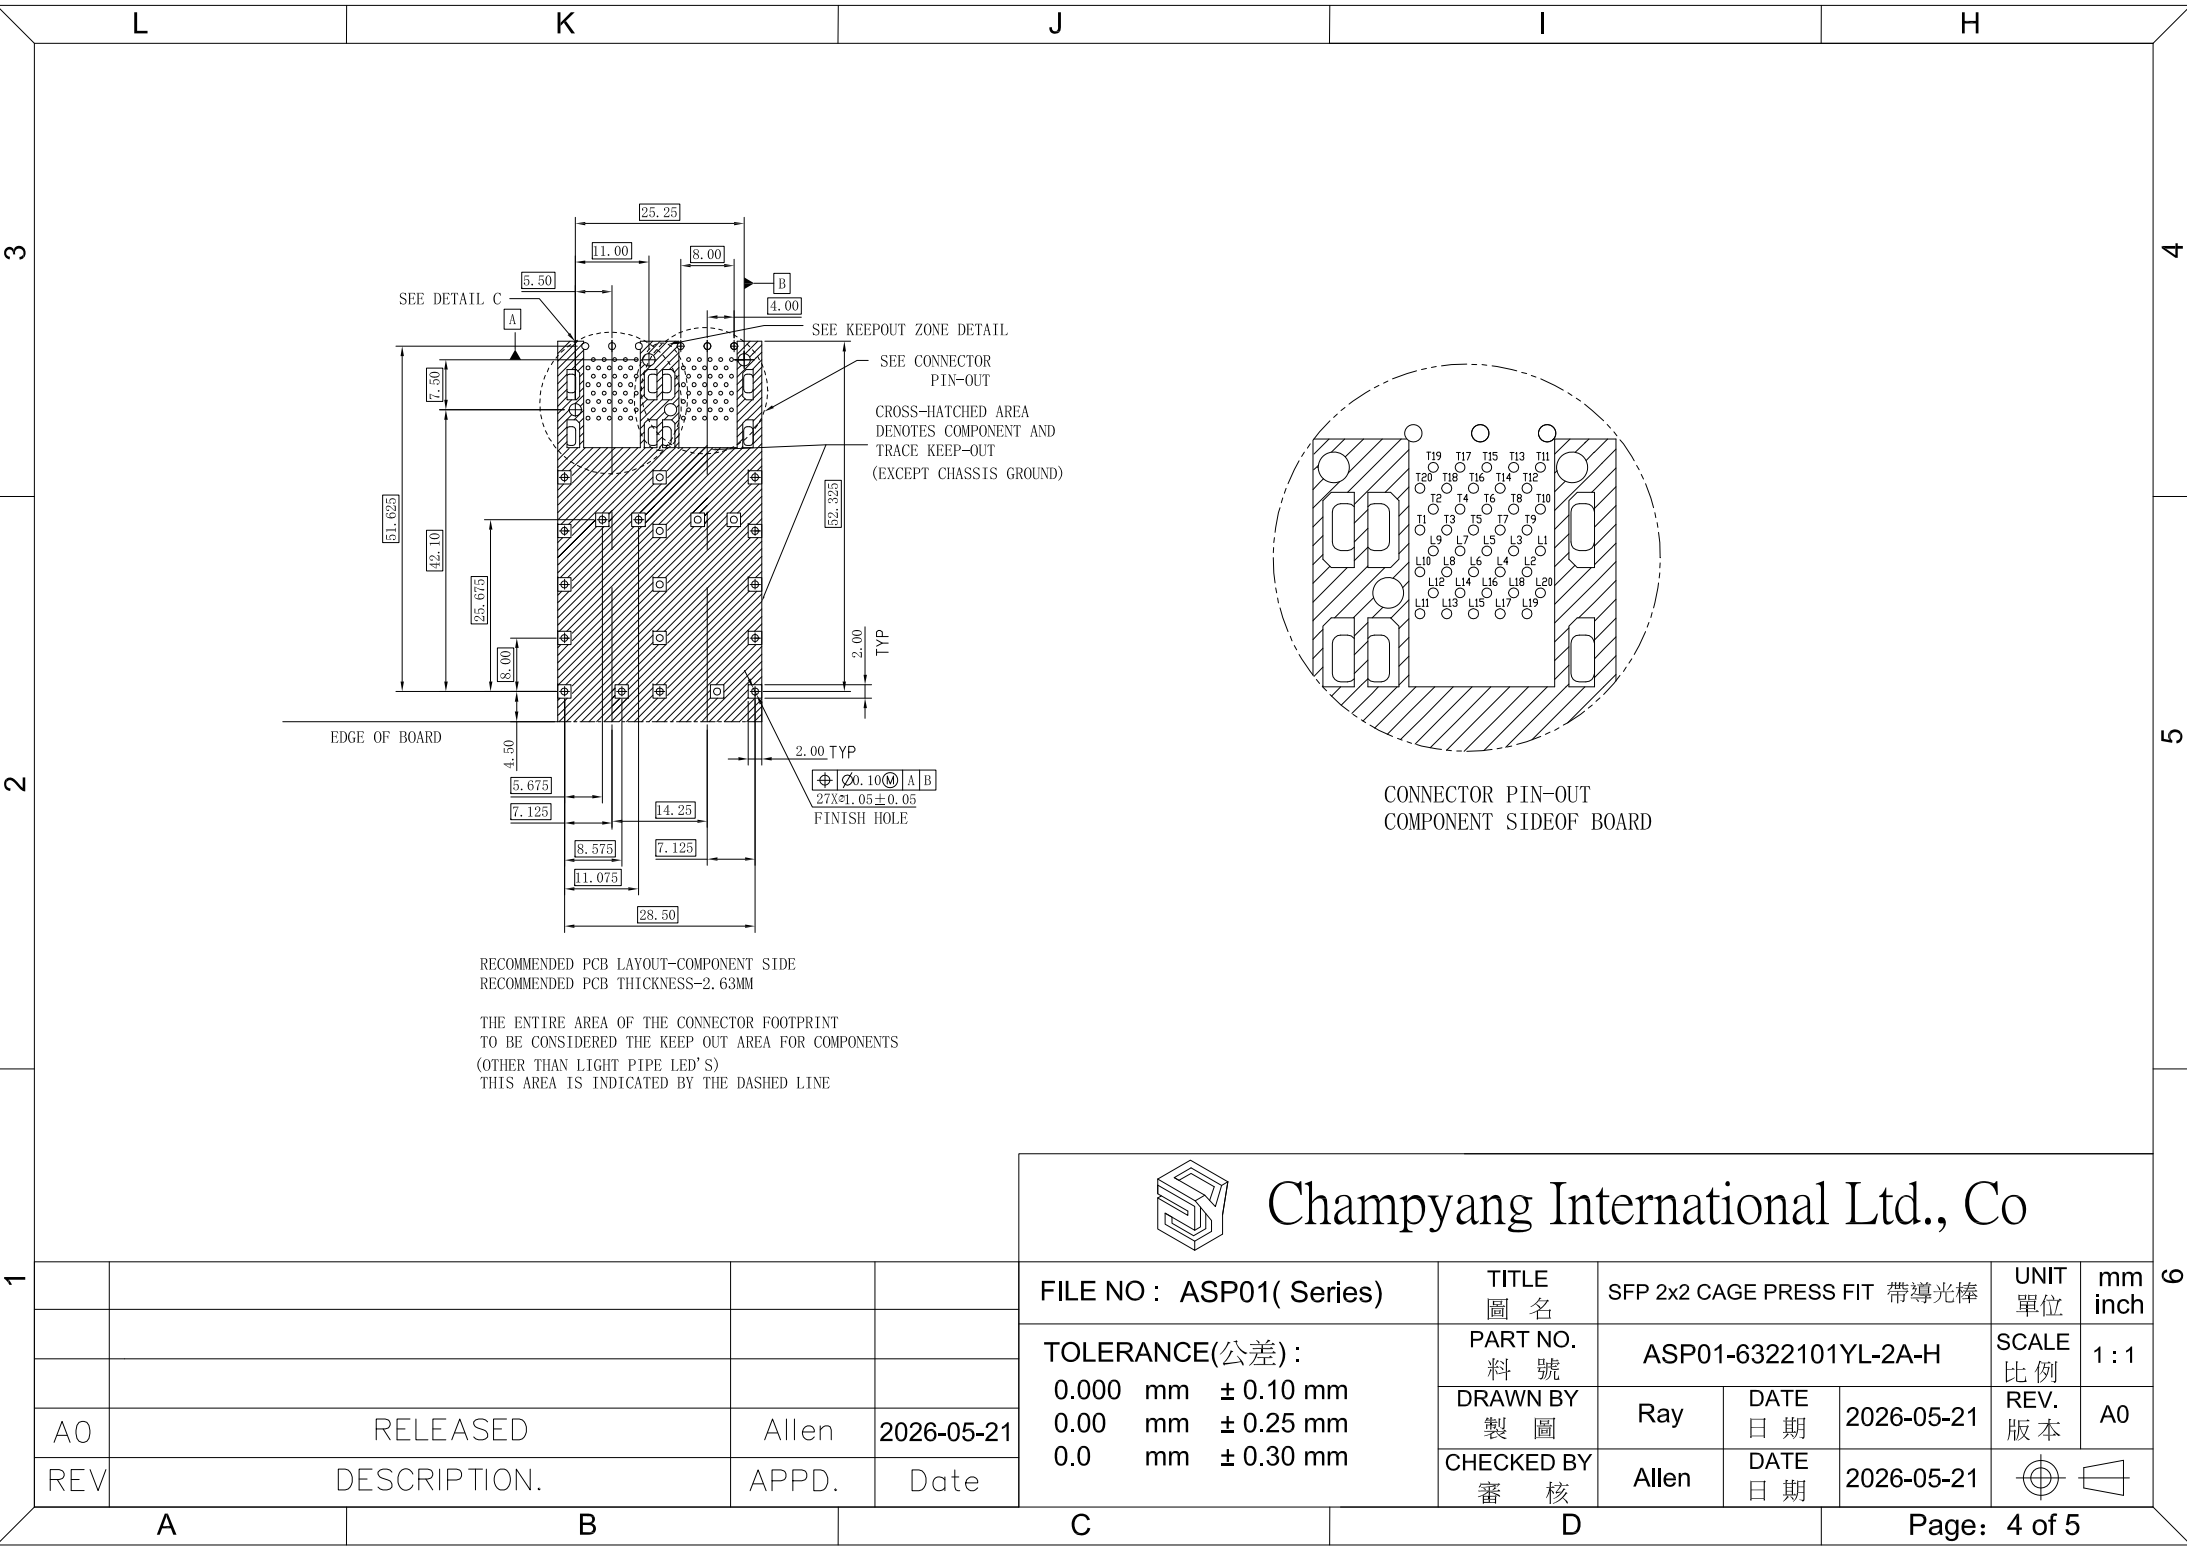

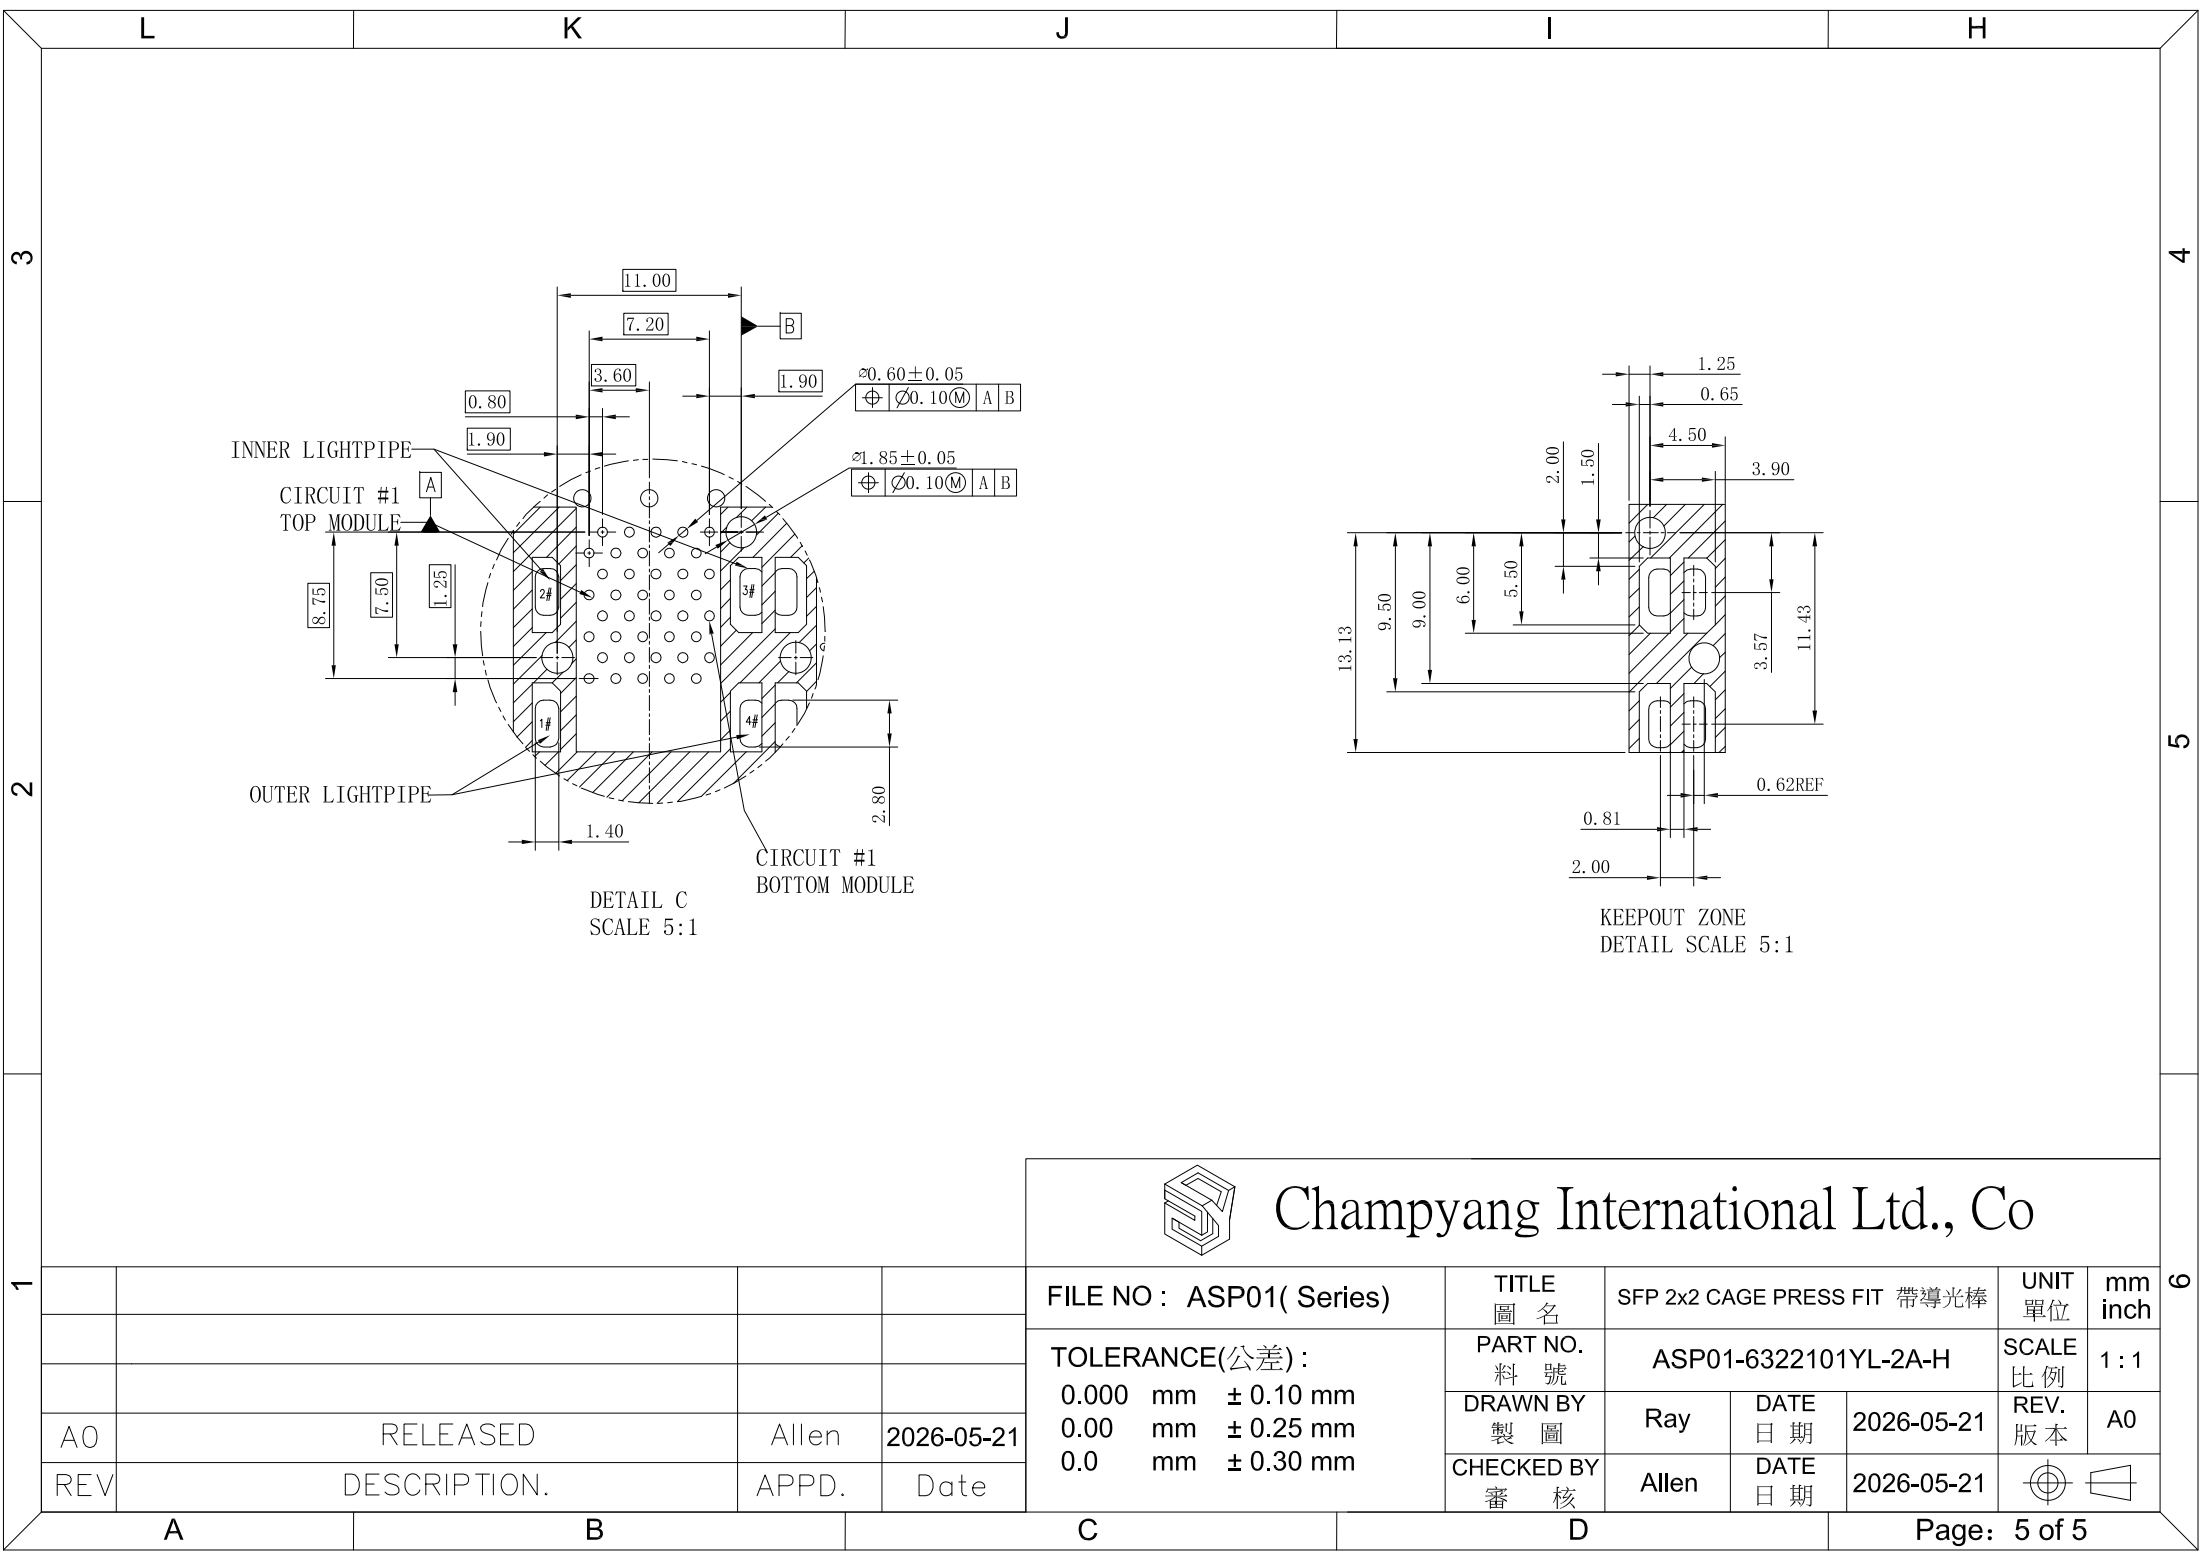

Champyang International Ltd., Co

1					FILE NO : ASP01(Series)		TITLE 圖 名	SFP 2x2 CAGE PRESS FIT 帶導光棒			UNIT 單位	mm inch	6	
					TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		PART NO. 料 號	ASP01-6322101YL-2A-H			SCALE 比例	1 : 1		
							DRAWN BY 製 圖	Ray	DATE 日 期	2026-05-21	REV. 版本	A0		
	A0	RELEASED		Allen			2026-05-21	CHECKED BY 審 核	Allen	DATE 日 期	2026-05-21			
	REV	DESCRIPTION.		APPD.			Date							
A		B		C		D		Page: 5 of 5						