




- NOTES:
1. MATERIAL:
CAGE: COPPER ALLOY THICKNESS:0.25mm
EMI SPRING FINGERS BERYLLIUM COPPER THICKNESS:0.06mm REF HEATSINK: COPPER
HEATSINKCLIP: STEEL LIGHTPIPE: PC.
 2. FINISH:
CAGE: 0.762um Min NICKLE OVERALL
EMI SPRING FINGERS: 0.762um Min NICKLE OVERALL.
 3. PACKAGING:
PRODUCT PACKAGED IN TRAYS AND CARTONS.


局部视图: A
比例 5:1


局部视图: B


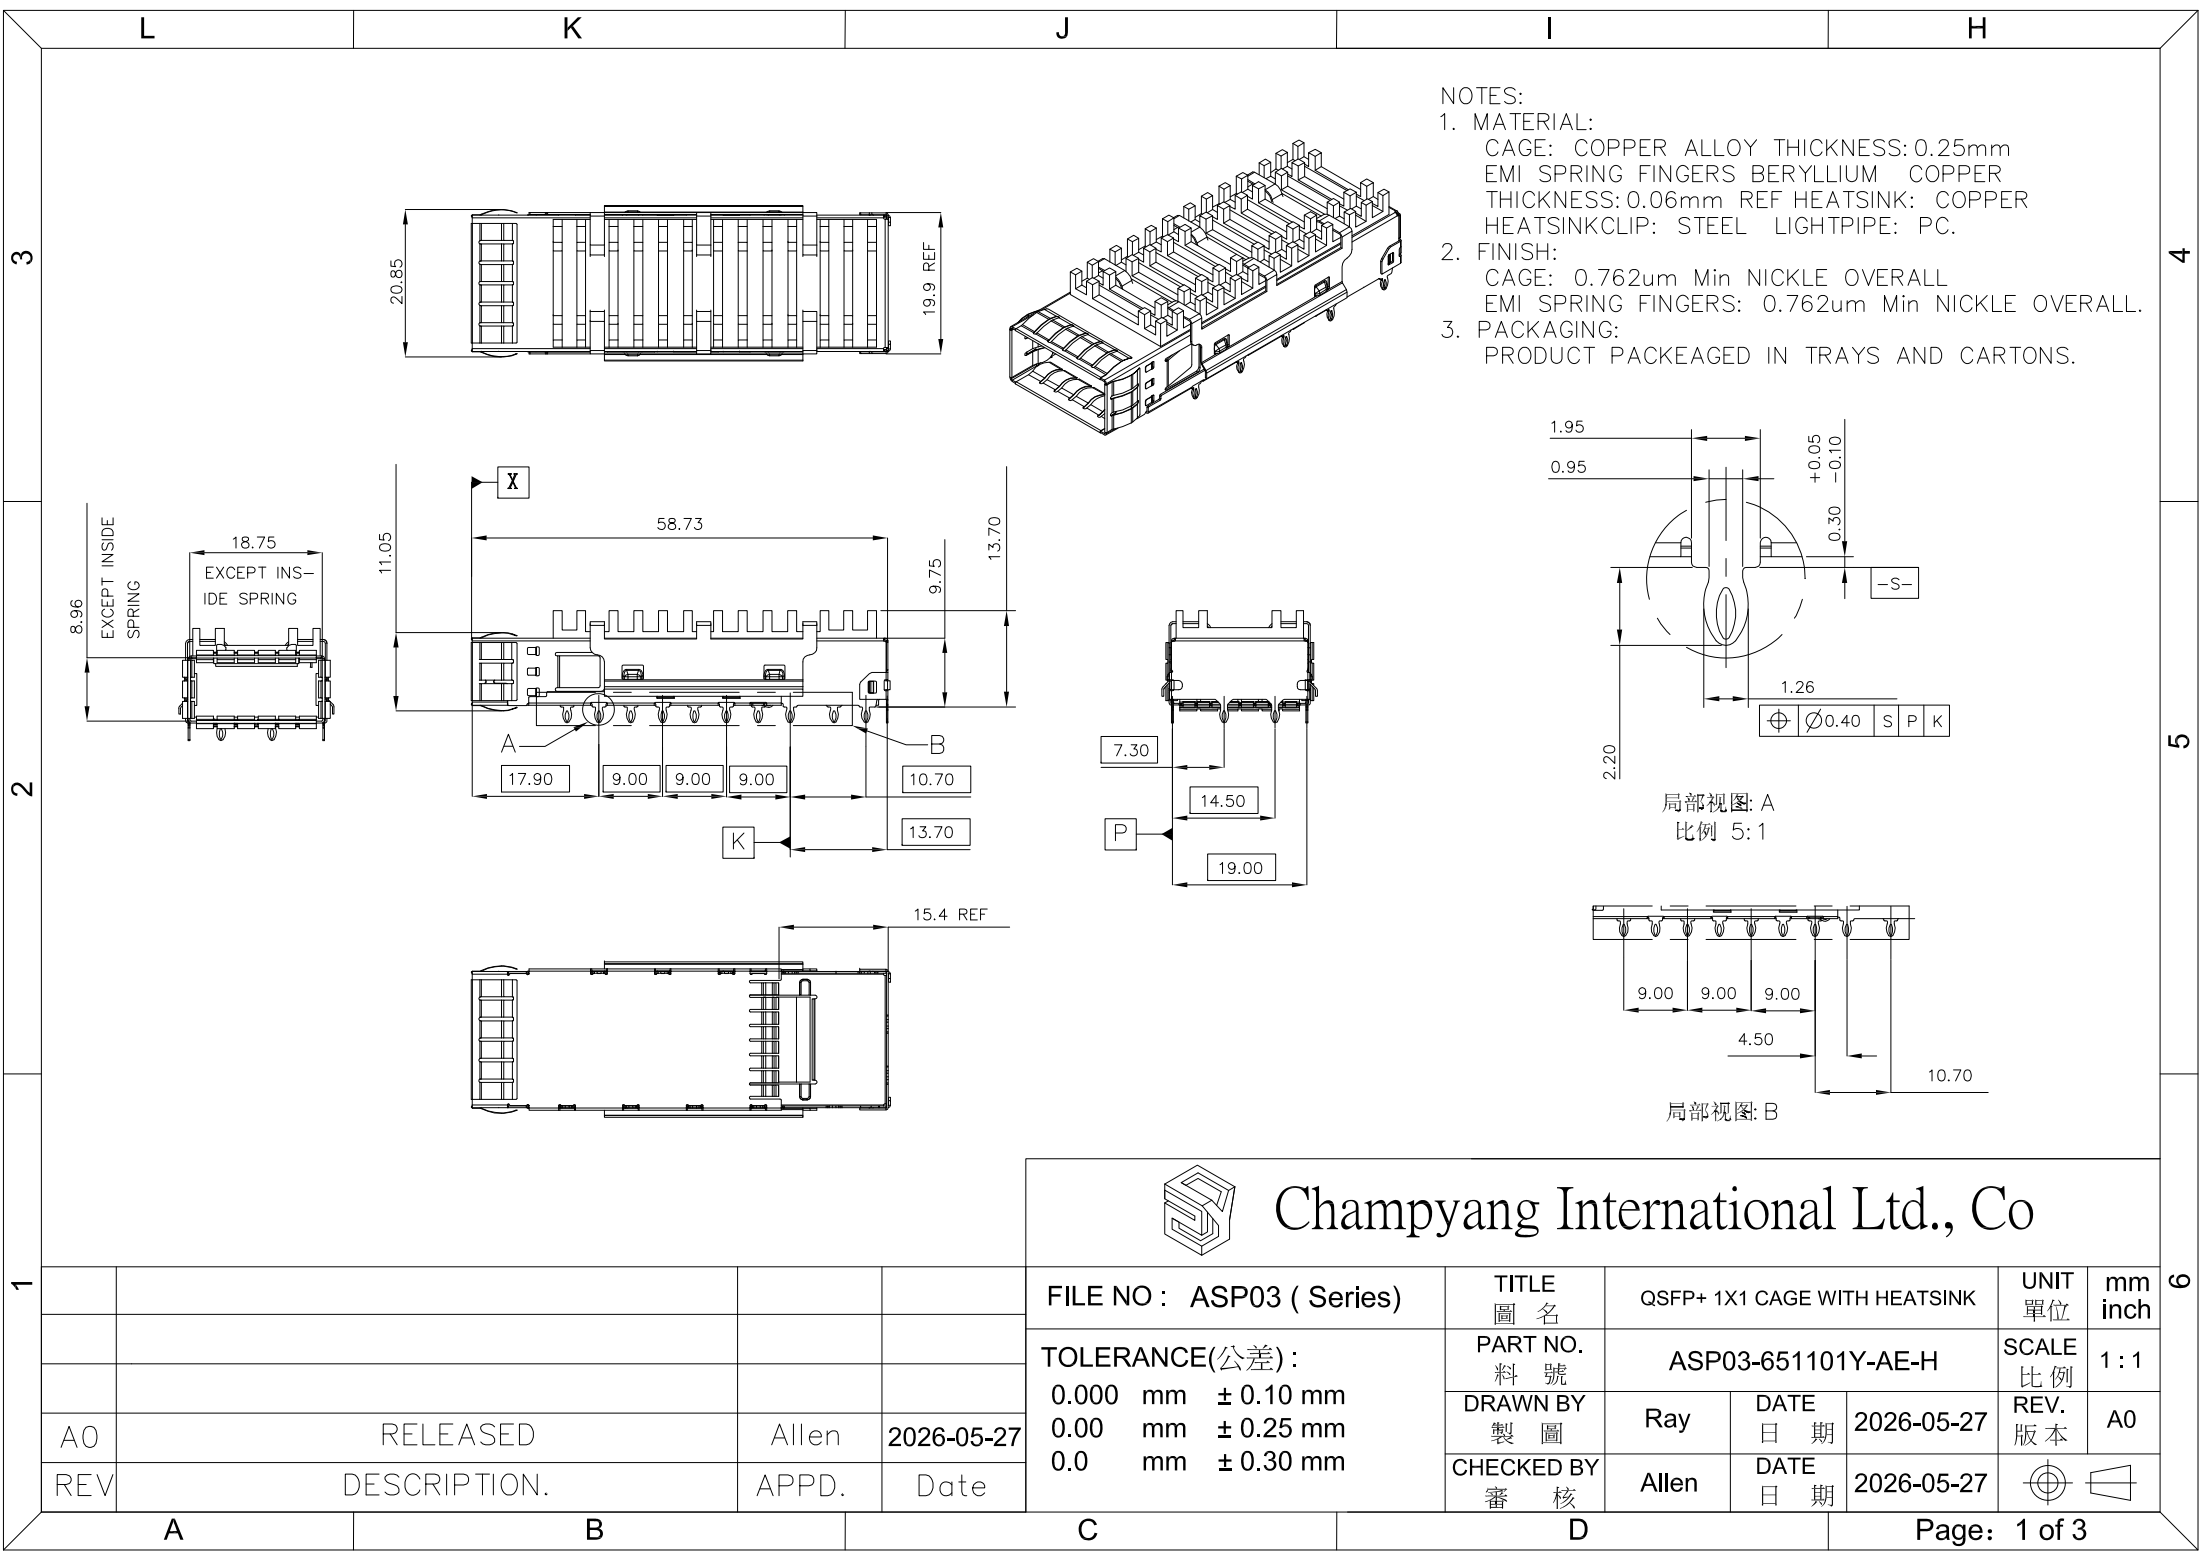


Champyang International Ltd., Co

A0	RELEASED	Allen	2026-05-27
REV	DESCRIPTION.	APPD.	Date

FILE NO : ASP03 (Series)	TITLE 圖 名	QSFP+ 1X1 CAGE WITH HEATSINK			UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm	PART NO. 料 號	ASP03-651101Y-AE-H			SCALE 比例	1 : 1
	DRAWN BY 製 圖	Ray	DATE 日 期	2026-05-27	REV. 版本	A0
	CHECKED BY 審 核	Allen	DATE 日 期	2026-05-27		

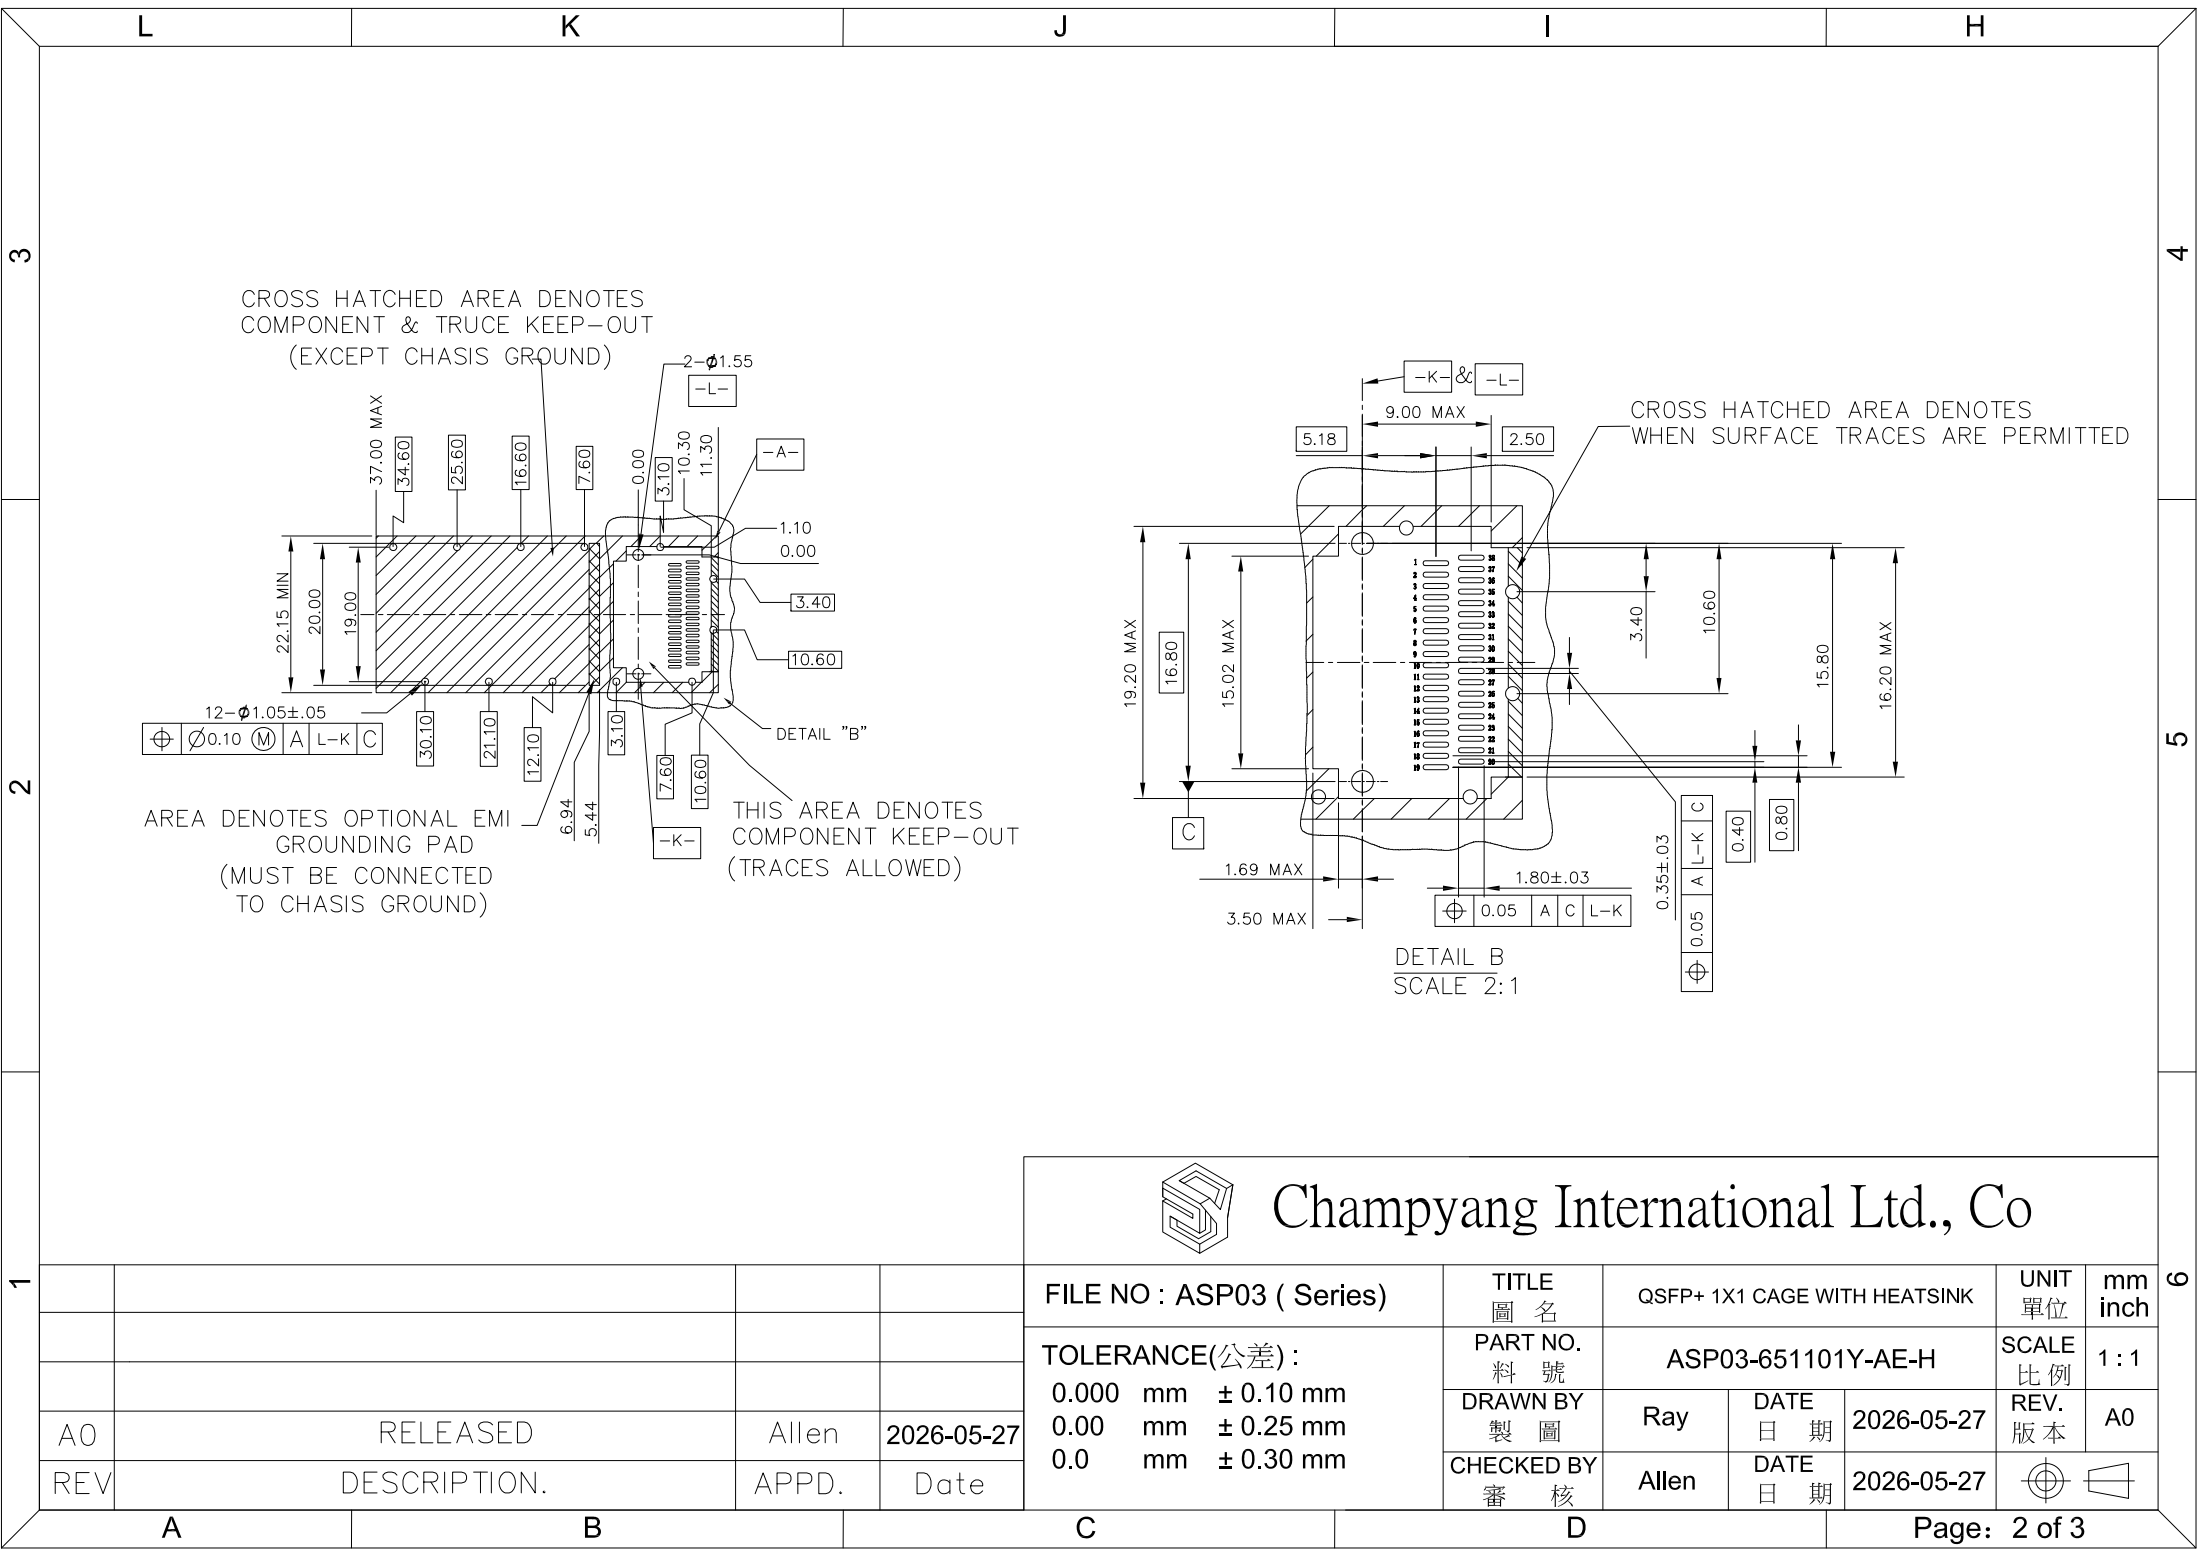

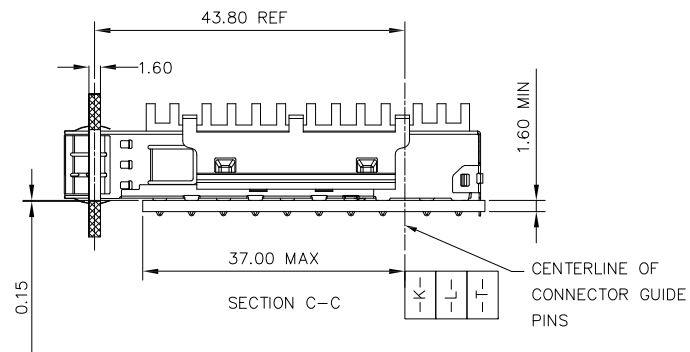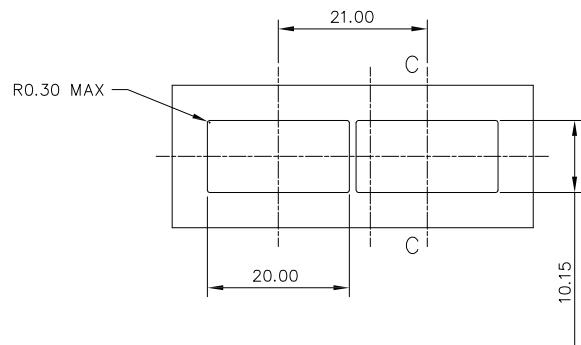

PCB LAYOUT FOR SINGLE SIDED APPLICATION

- NOTES:
1. SEE QSFP MSA SPECIFICATION FOR BEZEL LOCATION TOLERANCE
 2. DATUM -A- IS TIP SURFACE OF HOST BOARD PER MSA
 3. FINISHED HOLE SIZE (AFTER PLATING)
 4. DATUM -K- IS HOST BOARD THREE HOLE #1 TO ACCEPT CONNECTOR GUIDE POST PER MSA
 5. DATUM -L- IS HOST BOARD THREE HOLE #2 TO ACCEPT CONNECTOR GUIDE POST PER MSA
 6. DATUM -T- IS HARD STOP ON CAGE PER MSA



Champyang International Ltd., Co

A0	RELEASED	Allen	2026-05-27
REV	DESCRIPTION.	APPD.	Date

FILE NO : ASP03 (Series)		TITLE 圖 名		QSFP+ 1X1 CAGE WITH HEATSINK		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		PART NO. 料 號		ASP03-651101Y-AE-H		SCALE 比例	1 : 1
		DRAWN BY 製 圖		Ray	DATE 日 期	2026-05-27	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日 期	2026-05-27	