

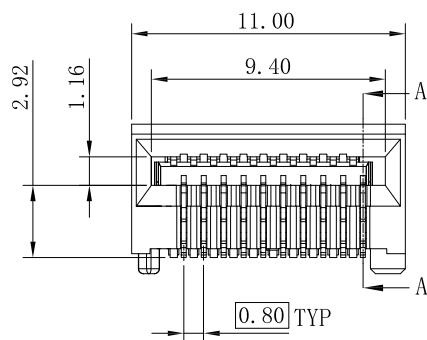


SECTION A-A

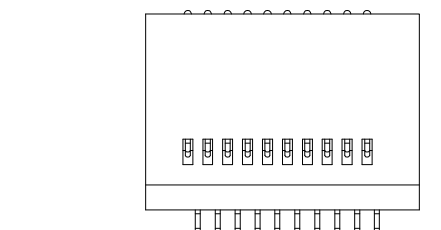

NOTE:
MATERIAL:
1. CONTACT: COPPER ALLOY.
2. HOUSING: HIGH TEMPERATURE
THERMOPLASTIC GLASS FILLED UL 94V-0.
BLACK.
CONTACT FINISH:
1. MATING AREA : PLATING GOLD
15u" OR 30u" MIN OVER 50u" MIN
NICKEL.
2. SOLDER TAILS: PLATING TIN
100u" MIN OVER 50u" MIN NICKEL.
ENVIRONMENTAL:
1. OPERATION: -40℃~+105℃.
2. STORAGE: -55 ℃~+105℃.

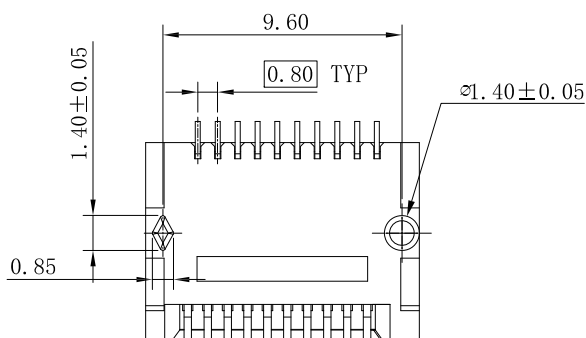

Champyang International Ltd., Co

A0	RELEASED	Allen	2026-05-27
REV	DESCRIPTION.	APPD.	Date

FILE NO : ASP04 (Series)		TITLE 圖 名		SFP28 1X1 20PIN 連接器座 鍍金15u		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		PART NO. 料 號		ASP04-682010-A-H		SCALE 比例	1:1
		DRAWN BY 製 圖		Ray	DATE 日 期	2026-05-27	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日 期	2026-05-27	A0

