
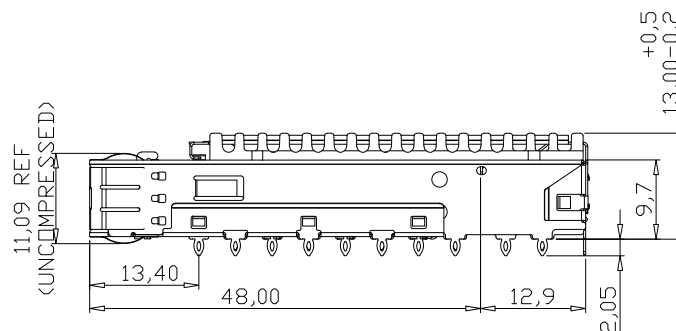
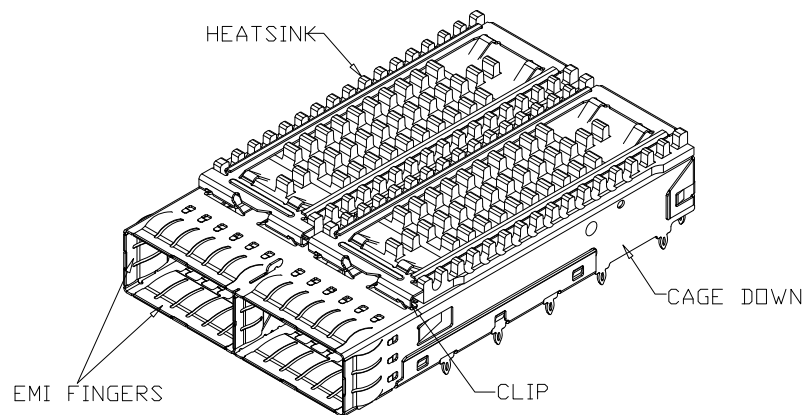
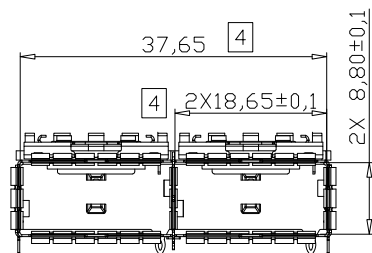






1. MATERIALS:
CAGE UP: COPPER ALLOY(C7701),NICKEL PLATED.
HEATSINK: ALUMINUM
HEATSINK CLIP: STAINLESS STEEL
2. SURFACE FINISH:
BODY CAGE: CLEANING
EMI SPRING FINISH: CLEANING AND HOLE SEALING
HEATSINK FINISH: WHITE ANODIZED (银白色)
HEATSINK CLIP FINISH: CLEANING
3. MATE WITH QSFP MSA COMPATIBLE TRANSCEIVER.
☒ INSIDE SURFACE OF CASKET WHEN FULLY COMPRESSED.
5. REFERENCE DOCUMENTS:
PRODUCT SPECIFICATION: SFF-8663
6. THIS PRODUCT COMPLY TO ROHS DIRECTIVE 2011/65/EU.

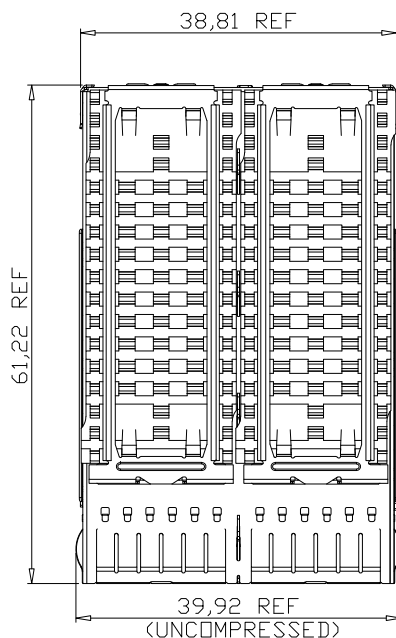

Champyang International Ltd., Co

A0	RELEASED	Allen	2026-05-27
REV	DESCRIPTION.	APPD.	Date

FILE NO : ASP06 (Series)		TITLE 圖 名		QSFP28 1X2 無導光柱 帶散熱器12.8mm		UNIT 單位	mm inch
TOLERANCE(公差):		PART NO. 料 號		ASP06-6512103YAE-BL-H		SCALE 比例	1 : 1
0.000 mm ± 0.10 mm		DRAWN BY 製 圖		Ray	DATE 日 期	2026-05-27	REV. 版本
0.00 mm ± 0.25 mm		CHECKED BY 審 核		Allen	DATE 日 期	2026-05-27	A0
0.0 mm ± 0.30 mm							

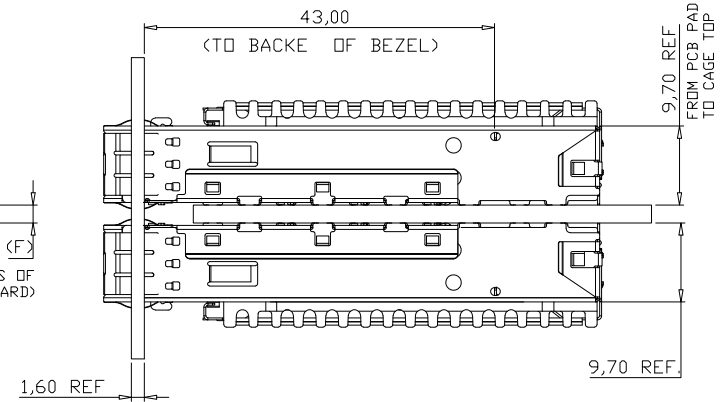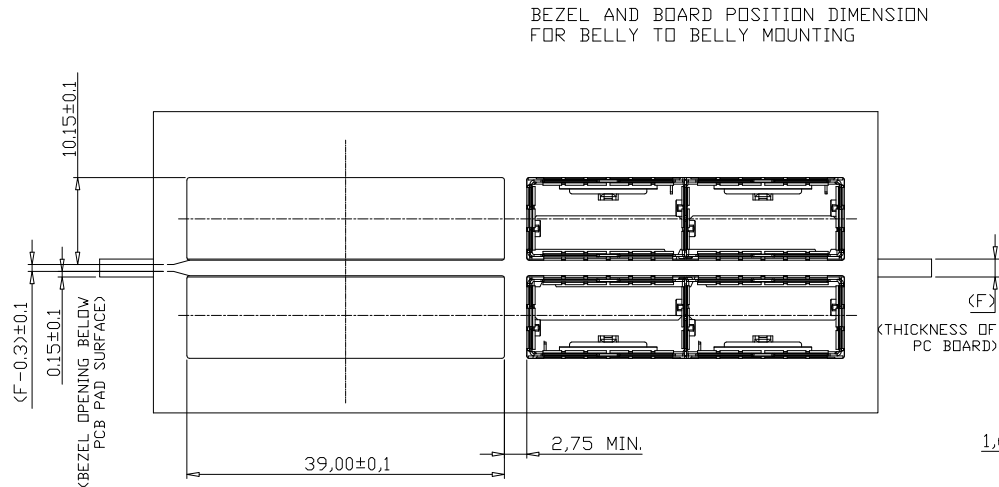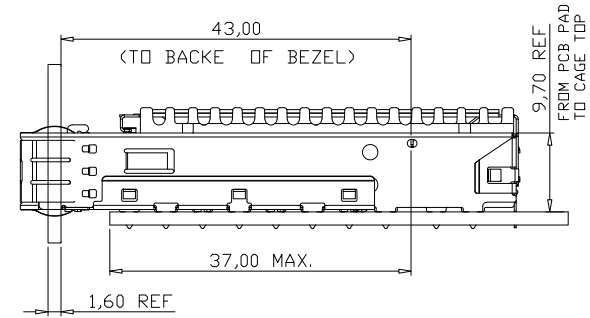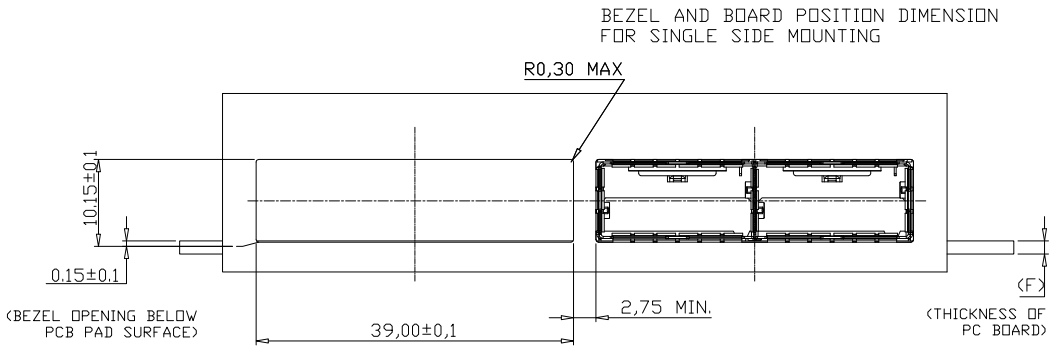

NOTES:



1. THE NORMAL THICKNESS OF CUSTOMER SUPPLIED PC BOARD.(DIM. *F*)
SINGLE SIDED PC BOARD THICKNESS: 1.60mm MIN.
BELLY TO BELLY PC BOARD THICKNESS: 3.0mm MIN.
2. GENERAL TOLERANCE: ±0.05.



Champyang International Ltd., Co

A0	RELEASED	Allen	2026-05-27
REV	DESCRIPTION.	APPD.	Date

FILE NO : ASP06 (Series)		TITLE 圖 名		QSFP28 1X2 無導光柱 帶散熱器12.8mm		UNIT 單位	mm inch
TOLERANCE(公差):		PART NO. 料 號		ASP06-6512103YAE-BL-H		SCALE 比例	1 : 1
0.000 mm ± 0.10 mm		DRAWN BY 製 圖		Ray	DATE 日 期	2026-05-27	REV. 版本
0.00 mm ± 0.25 mm		CHECKED BY 審 核		Allen	DATE 日 期	2026-05-27	A0
0.0 mm ± 0.30 mm							

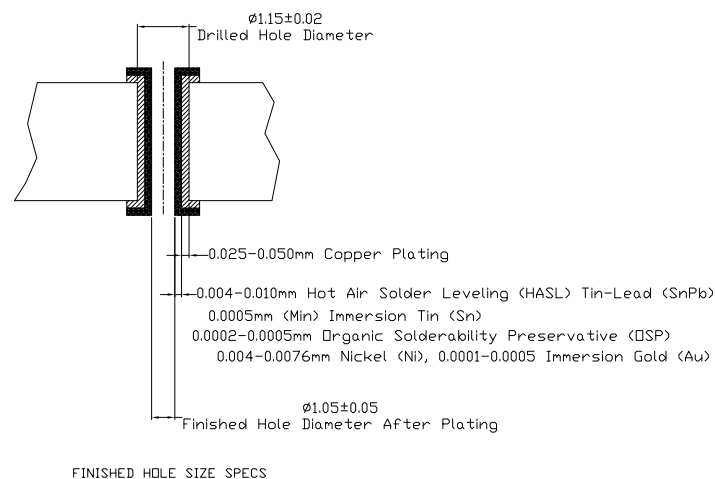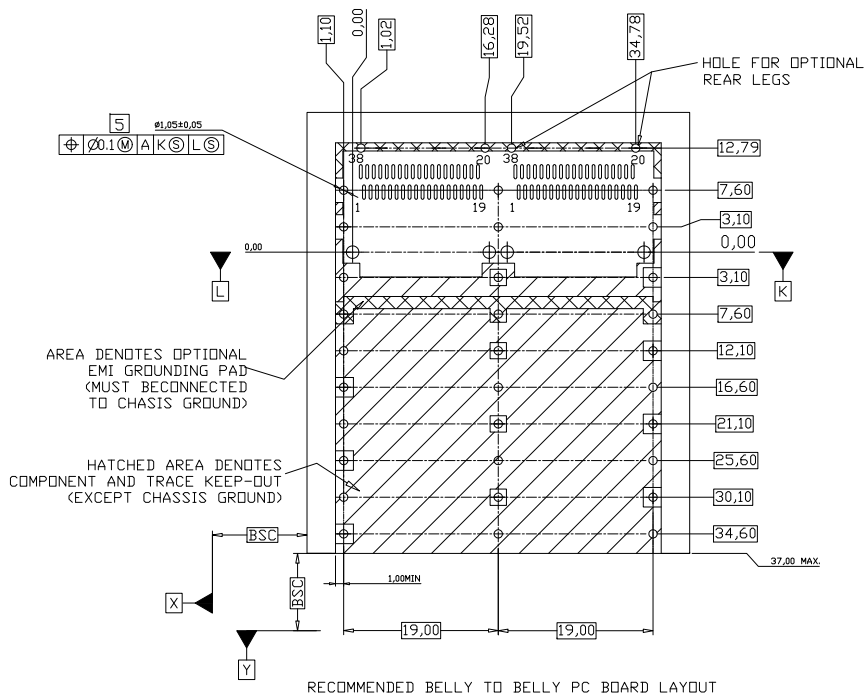

Champyang International Ltd., Co

A0	RELEASED	Allen	2026-05-27
REV	DESCRIPTION.	APPD.	Date

FILE NO : ASP06 (Series)		TITLE 圖 名		QSFP28 1X2 無導光柱 帶散熱器12.8mm		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.10 mm 0.00 mm ± 0.25 mm 0.0 mm ± 0.30 mm		PART NO. 料 號		ASP06-6512103YAE-BL-H		SCALE 比例	1 : 1
		DRAWN BY 製 圖		Ray	DATE 日 期	2026-05-27	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日 期	2026-05-27	