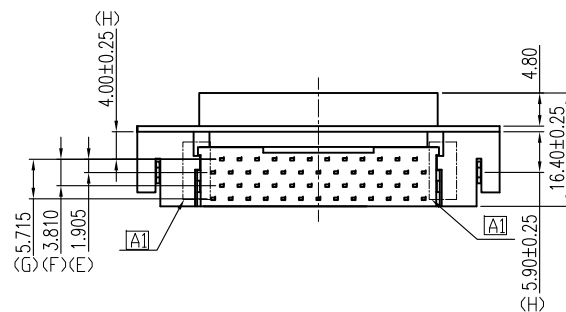

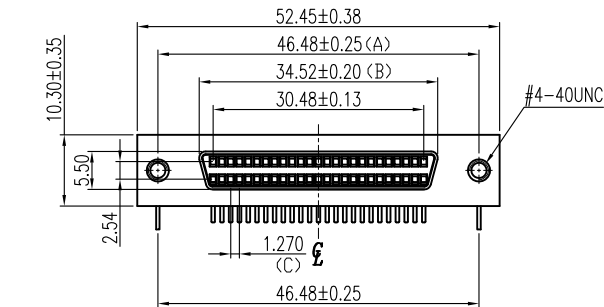


RECOMMENDED P.C.B. LAYOUT
INSPECTION DIMENSION:(A)~(H)

SPECIFICATIONS

- SCSI
 - Current Rating: 1 Ampere per Contact
 - Contact Resistance: 35 Milliohms Max.
 - Insulation Resistance: 1000 Megohms Min.
 - Dielectric Withstanding Voltage: 500V DC(RMS)
 - Total Mating Force: 17.7 Kgf Max.
 - Total Unmating Force: 1.6 Kgf Min.
 - Operating Temperature: -55°C to +85°C

NOTES

- MATERIAL:
 - Housing:PBT, UL 94V-0, Color:Black.
 - Terminal:Copper Alloy.
 - Shell:Zinc Alloy.
 - Boardlock:Copper Alloy.
 - Screw:Copper Alloy.
- FINISH:
 - Terminal:Gold Plated over Nickel at Contact Area.
 - Tin Plated over Nickel at Solder Ared.
 - Shell:Nickel Plated.
 - Boardlock:Tin Plated.
 - Screw:Nickel Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.



Champyang International Ltd., Co

A0			
REV	RELEASED	Allen	2018-12-10
	DESCRIPTION.	APPD.	Date

FILE NO : ASR02(Series)		TITLE 圖 名		SCSI 50S 磷銅G/F鍍殼二爪附4.8 黑色PBT 舊型		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.13 mm 0.00 mm ± 0.25 mm		PART NO. 料 號		ASR02-50F-2F22B12N1		SCALE 比例	1 : 1
		DRAWN BY 製 圖		Kiddy	DATE 日期	2018-12-10	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日期	2018-12-10	