






NOTE:
1.MATERIAL SPECIFICATION:
1.HOUSING:LCP,UL94 V-0.
2.TERMINAL: COPPER ALLOY(C1814)
3.MID PLATE: STAINLESS STEEL(SUS301)
4.FRONT SHELL: STAINLESS STEEL(SUS304)
2.PLATING SPECIFICATION:
2-1.TERMINAL:
Ni 50u" MIN. UNDER PLATED OVER ALL.
Au PLATED ON THE FUNCTIONAL AREA OF CONTACT.
(GOLD PLATING THICKNESS FOLLOW THE P/N)
PLATING SPECIFICATIONS OF THE SOLDER AREA FOLLOW THE P/N
2-2.FRONT SHELL:
Ni 50u" MIN. UNDER PLATED OVER ALL.
2-3.MID PLATE:
CLEAR ONLY
3.MECHANICAL PERFORMANCE,
3-1.INSERTION FORCE: 0.5~2.0kgf.
3-2.REMOVAL FORCE: 0.8kgf~2.0kgf.
3-3.DURABILITY: 10000 CYCLES.
4.ELECTRICAL PERFORMANCE,
4-1. VOLTAGE RATING:5 V DC/AC (RMS. max)
CURRENT RATING:5 AMPS. FOR TOTAL VBUS/GND PINS;
1.25AMPS FOR CC PIN,0.25 AMPS. FOR ALL OTHER CONTACT.
4-2. LLCR:
VBUS & GND PINS AND OTHER PINS: 40mΩ/PIN MAX.
SHIELD: 50mΩ/MAX.
LLCR MAX. CHANGE OF ALL PINS: 10mΩ.
4-3.INSULATION RESISTANCE: 100MΩ MIN
4-4.DIELECTRIC WITHSTAND VOLTAGE,AC 100V FOR 1 MINUTE.
5. ENVIRONMENTAL PERFORMANCE:
OPERATING TEMPERATURE: -25°C~+85°C.
6.IR REFLOW:
THE PEAK TEMPERATURE ON THE BOARD SHALL
BE MAINTAINED FOR 10 SECONDS AT 260°C.

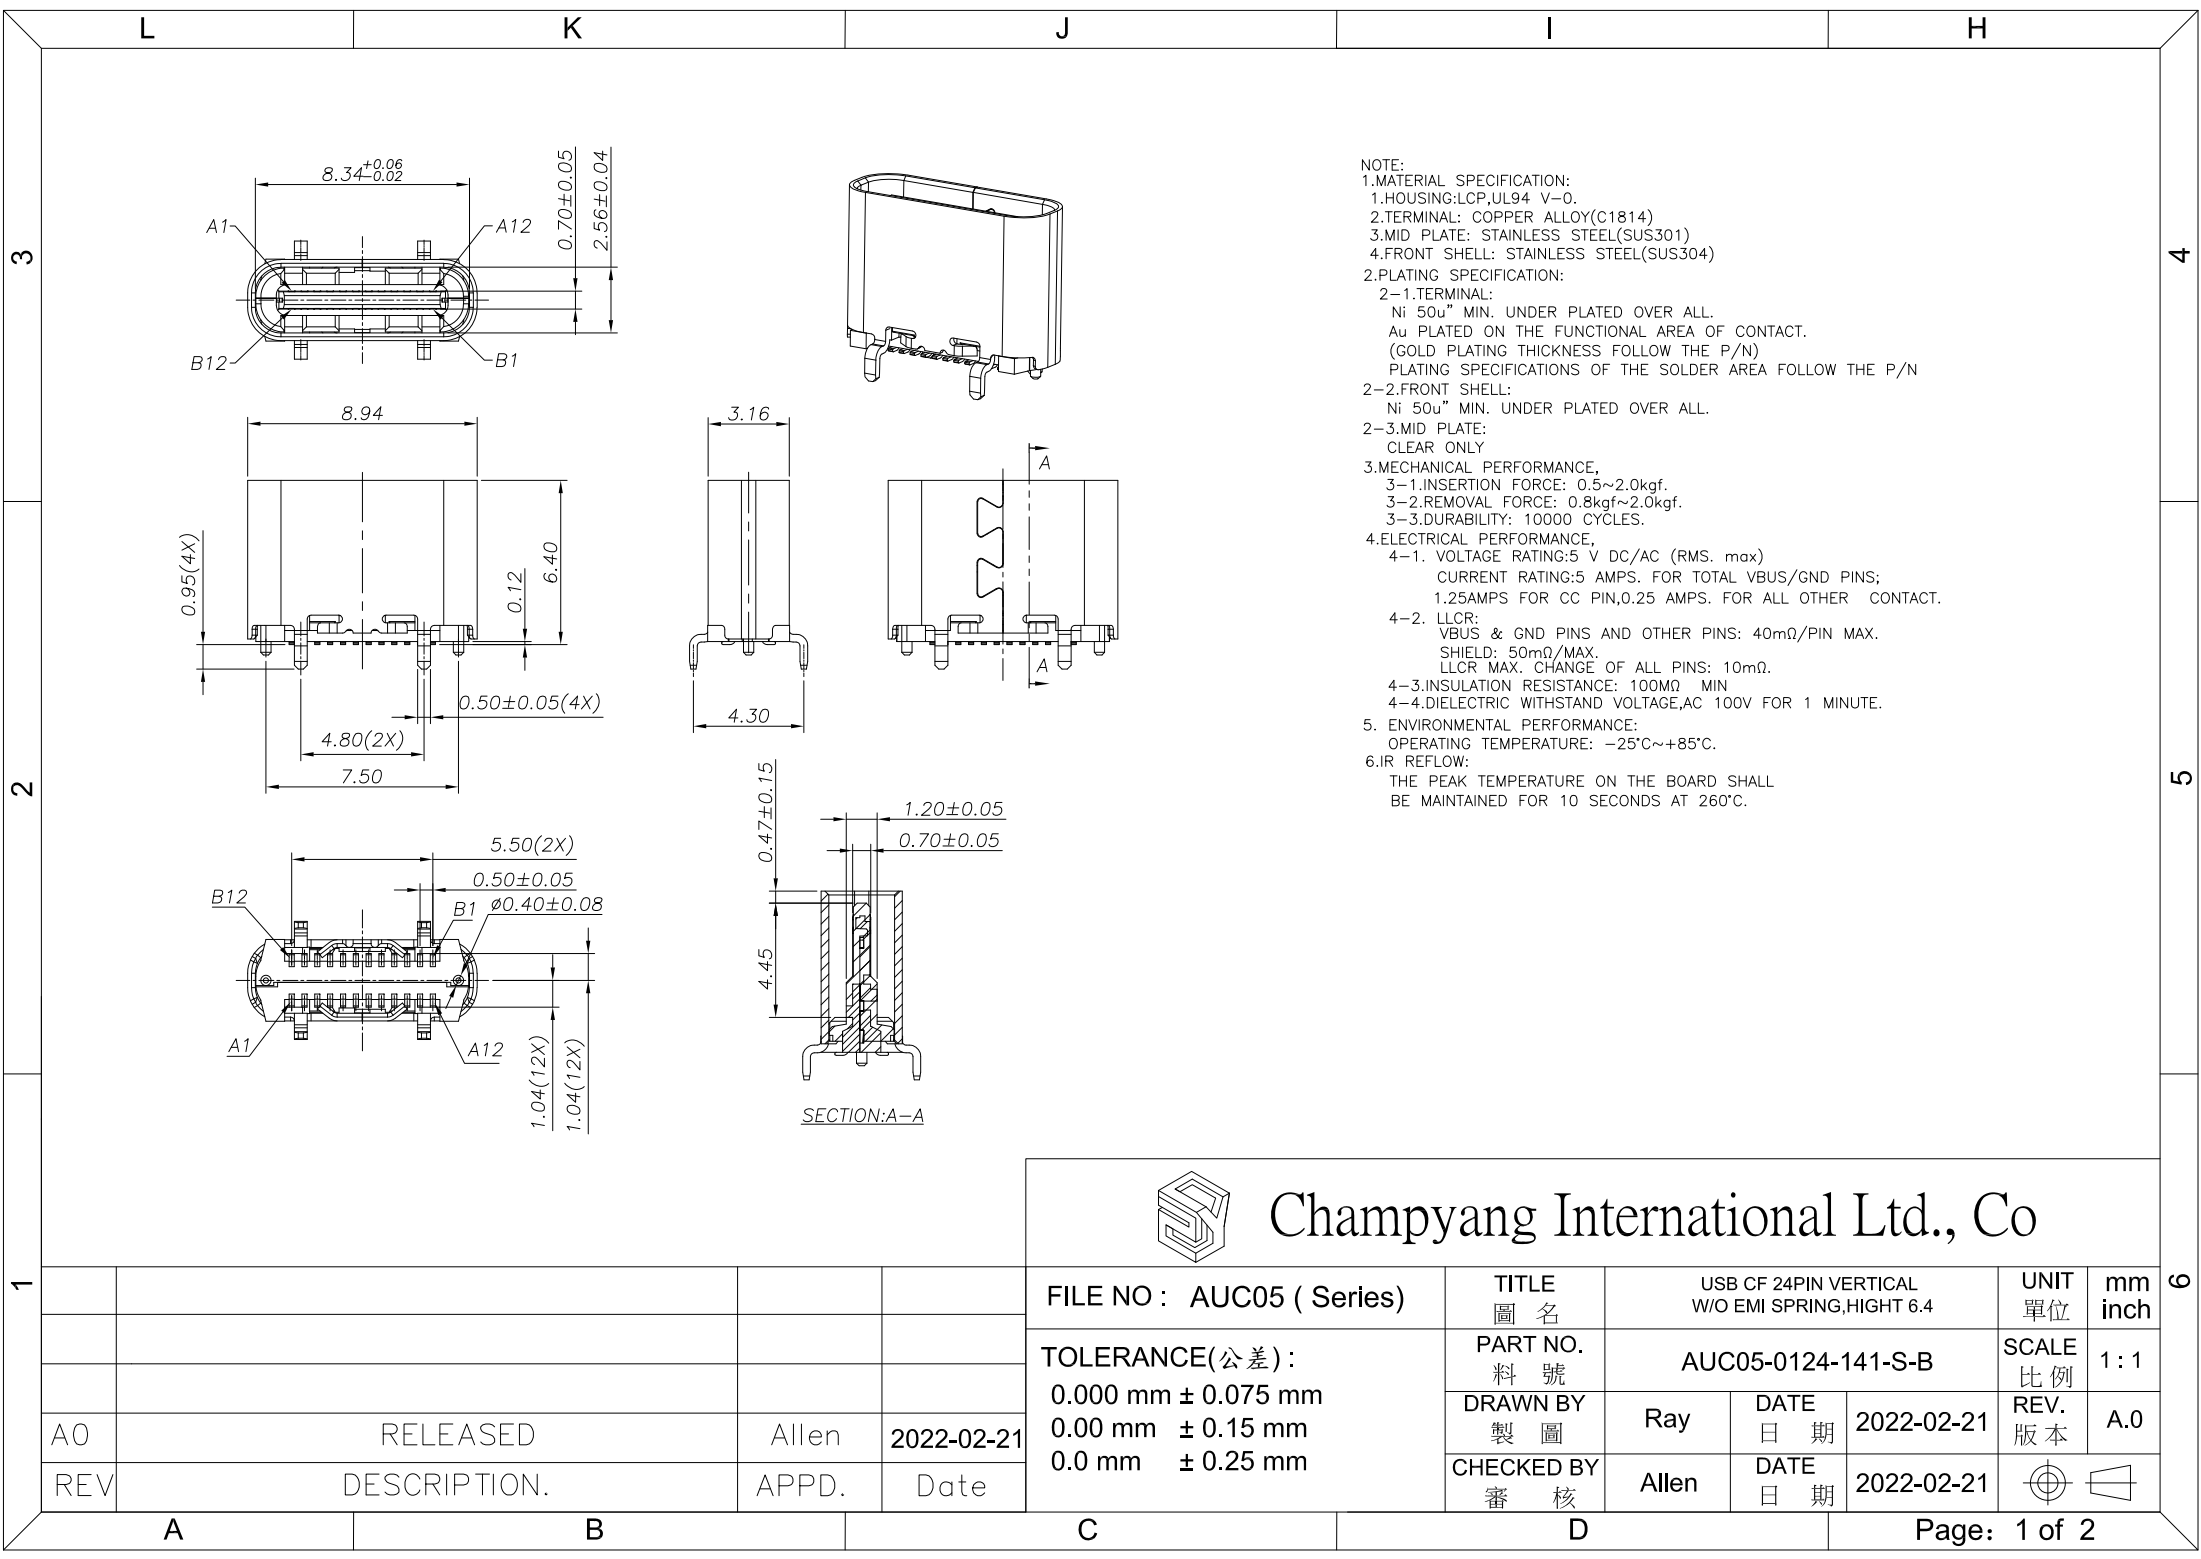

Champyang International Ltd., Co

A0	RELEASED	Allen	2022-02-21
REV	DESCRIPTION.	APPD.	Date


FILE NO : AUC05 (Series)		TITLE 圖 名		USB CF 24PIN VERTICAL W/O EMI SPRING,HIGHT 6.4		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料 號		AUC05-0124-141-S-B		SCALE 比例	1:1
		DRAWN BY 製 圖		Ray	DATE 日 期	2022-02-21	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日 期	2022-02-21	

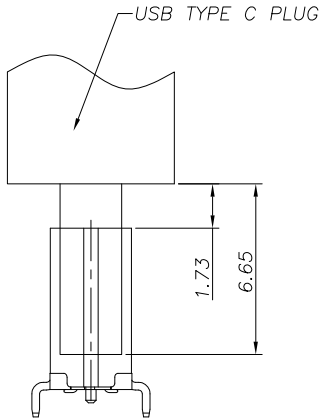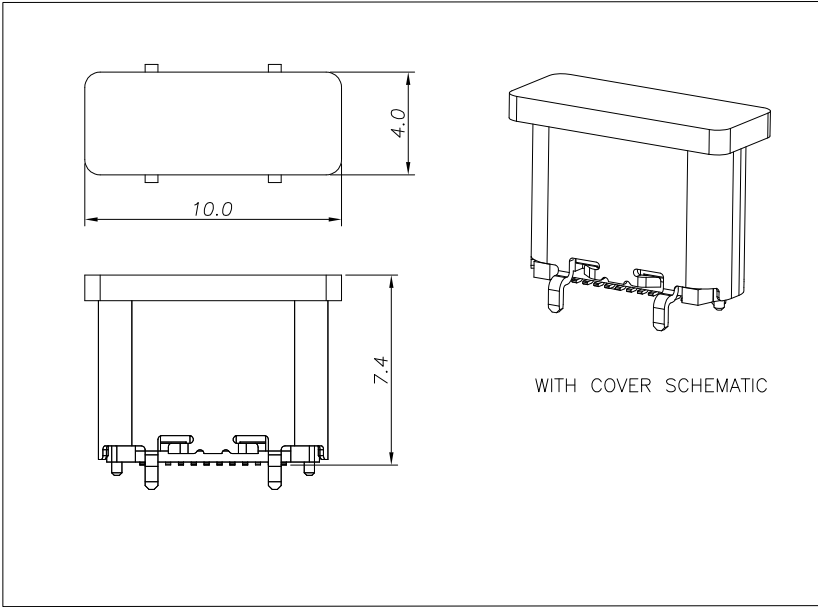

FEMALE AND MALE MATCHING DRAWING

USB TYPE-C PIN ASSIGNMENTS

PIN NUMBER	SIGNAL NAME	PIN NUMBER	SIGNAL NAME
A1	GND	B12	GND
A2	SSTXp1	B11	SSRXp1
A3	SSTXn1	B10	SSRXn1
A4	Vbus	B9	Vbus
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	Vbus	B4	Vbus
A10	SSRXn2	B3	SSTXn2
A11	SSRXp2	B2	SSTXp2
A12	GND	B1	GND

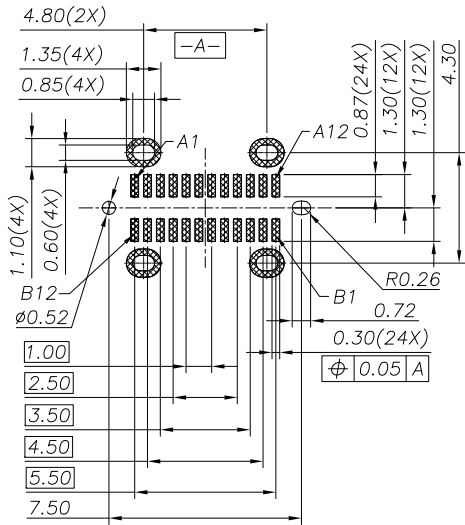

A0	RELEASED	Allen	2022-02-21
REV	DESCRIPTION.	APPD.	Date



Champyang International Ltd., Co

FILE NO : AUC05 (Series)	TITLE 圖 名	USB CF 24PIN VERTICAL W/O EMI SPRING,HIGHT 6.4			UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO. 料 號	AUC05-0124-141-S-B			SCALE 比例	1 : 1
	DRAWN BY 製 圖	Ray	DATE 日 期	2022-02-21	REV. 版本	A.0
	CHECKED BY 審 核	Allen	DATE 日 期	2022-02-21		