


RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

SPECIFICATION:

- CURRENT RATING: 5.0A MAX
- Withstanding Voltage: 100V AC
- TEMPERATURE RANGE: -30 °C ~ 85 °C
- CONTACT RESISTANCE: 40 MILLIONHM MAX
- INSULATION RESISTANCE: 100 MEGOHMS
- INSERTION FORCE : 5N~20N
- UNMATING FORCE: 8N~20N (1~1000次)
6N~20N (10000次之后)
- DURABILITY: 10,000 CYCLES

4	TYPE C MD	LCP	BLACK	UL 94V-0
3	CENTER PIECE	STAINLESS STEEL	—	NO Plated
2	TYPE C TERMINAL	C2680	—	Au/Ni80u"Plated
1	SHELL	STAINLESS STEEL	—	Ni50u" Plated
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK

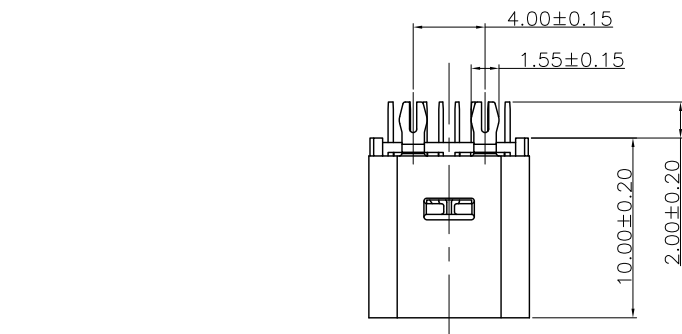

Champyang International Ltd., Co

A0	RELEASED	Allen	2019-07-01
REV	DESCRIPTION.	APPD.	Date

FILE NO : AUC06 (Series)		TITLE 圖 名		TYPE C 2.0 SOCKET 14PIN 180 Degree, DIP TYPE		UNIT 單位	mm inch
TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm		PART NO. 料 號		AUC06-0114-x41-D		SCALE 比例	1:1
		DRAWN BY 製 圖		Ben	DATE 日期	2019-07-01	REV. 版本
		CHECKED BY 審 核		Allen	DATE 日期	2019-07-01	